




# Filter pressure regulator, Series NL6-FRE

- G 3/4 G 1
- filter porosity 40 µm
- lockable
- with key
- with pressure gauge
- suitable for ATEX

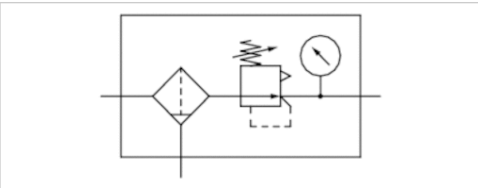

Type	1-part, Can be assembled into blocks
Parts	Filter pressure regulator
Mounting orientation	vertical
Certificates	suitable for ATEX
Working pressure min./max.	1,5 ... 16 bar
Ambient temperature min./max.	-10 ... 60 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Nominal flow Qn	15000 l/min
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	0,5 ... 10 bar
Pressure supply	single
Filter reservoir volume	125 cm³
Filter element	exchangeable
Condensate drain	semi-automatic, open without pressure
Max. Internal air consumption	0,5 l/min
Weight	2,26 kg

## Technical data

Part No.		Port	filter porosity	Flow	Condensate drain
				Qn	
0821300862		G 3/4	40 µm	15000 l/min	semi-automatic, open without pressure
0821300863		G 1	40 µm	15000 l/min	semi-automatic, open without pressure

Part No.	Pressure gauge
0821300862	with pressure gauge
0821300863	with pressure gauge

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar

Pressure gauge enclosed separately, Suitable for use in Ex zones 1, 2, 21, 22., Metal protective guard can be retrofitted for all polycarbonate reservoirs

## Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .  
Suitable for use in Ex zones 1, 2, 21, 22.

Note: Polycarbonate reservoirs are susceptible to solvents, supplementary information can be found at "Customer information".

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.

Also suitable for separation of fluid oil or water due to the design.

The rear pressure gauge connection on the pressure regulator is closed with a blanking plug, the front connection is open. Depending on the customer application, a second blanking plug may be necessary. Please order separately (see accessories).


Max. achievable compressed air class acc. to ISO 8573-1:2010 7 : 7 : -

## Technical information

Material	
Housing	Die-cast aluminum
Front plate	Acrylonitrile butadiene styrene
Seals	Acrylonitrile butadiene rubber
Reservoir	Polycarbonate
Filter insert	Polyethylene

Dimensions

Dimensions

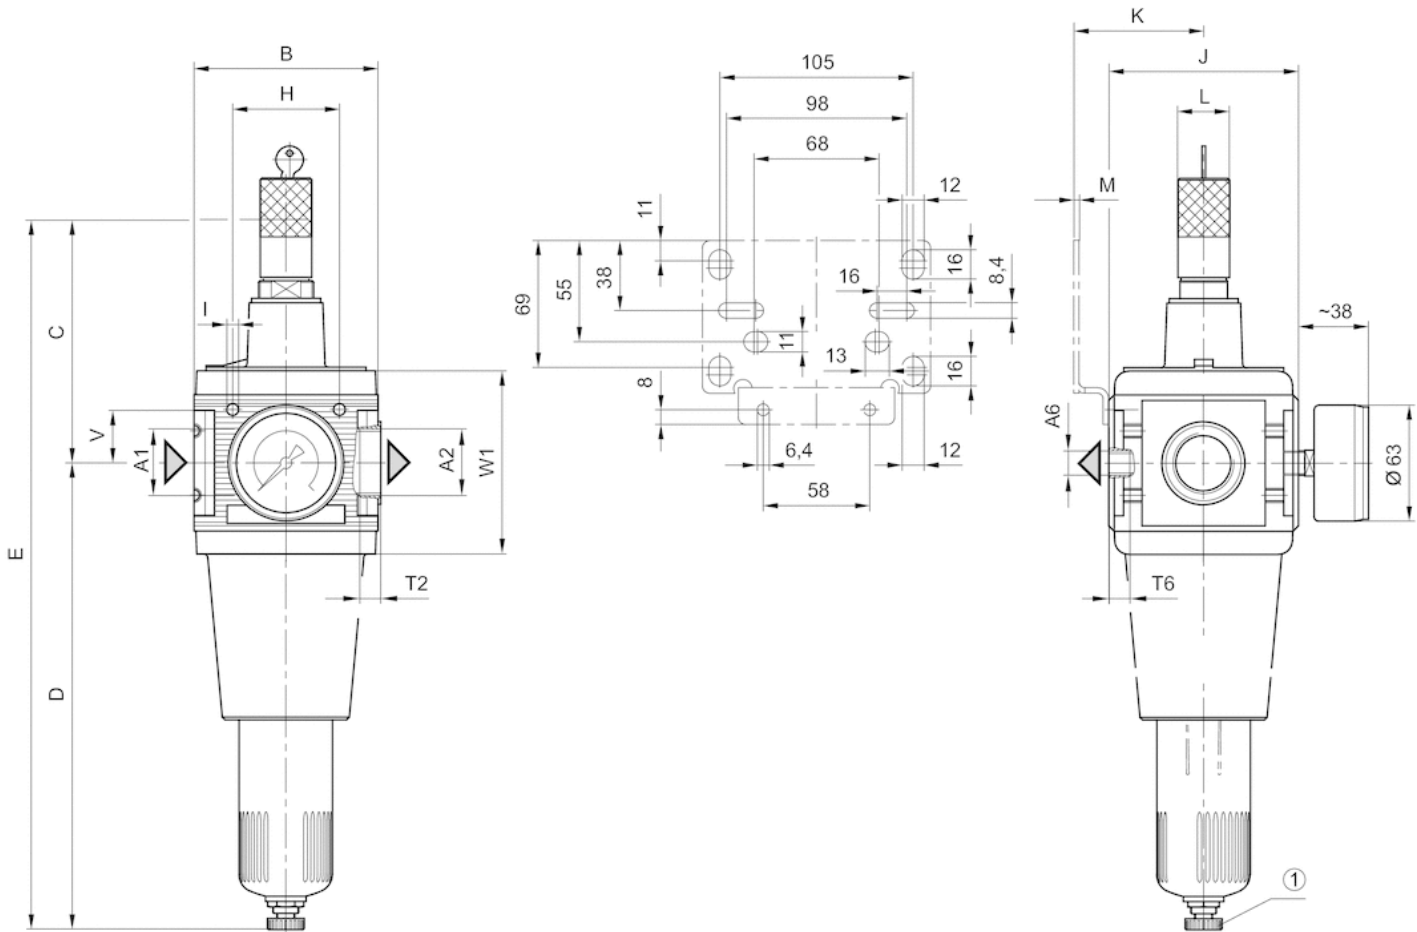


A1 = input  
A2 = output  
A6 = output  
1) semi-automatic condensate drain

Dimensions in mm

A1	A2	A6	B	C	D	E	H	I	J	K	L	M	T2	T6	V	W1
G 3/4	G 3/4	G 1/4	100	157	253	410	58	M6	103	70.5	28	3	18	7	29	101.5
G 1	G 1	G 1/4	100	157	253	410	58	M6	103	70.5	28	3	18	7	29	101.5


## Diagrams

## Pressure characteristics curve

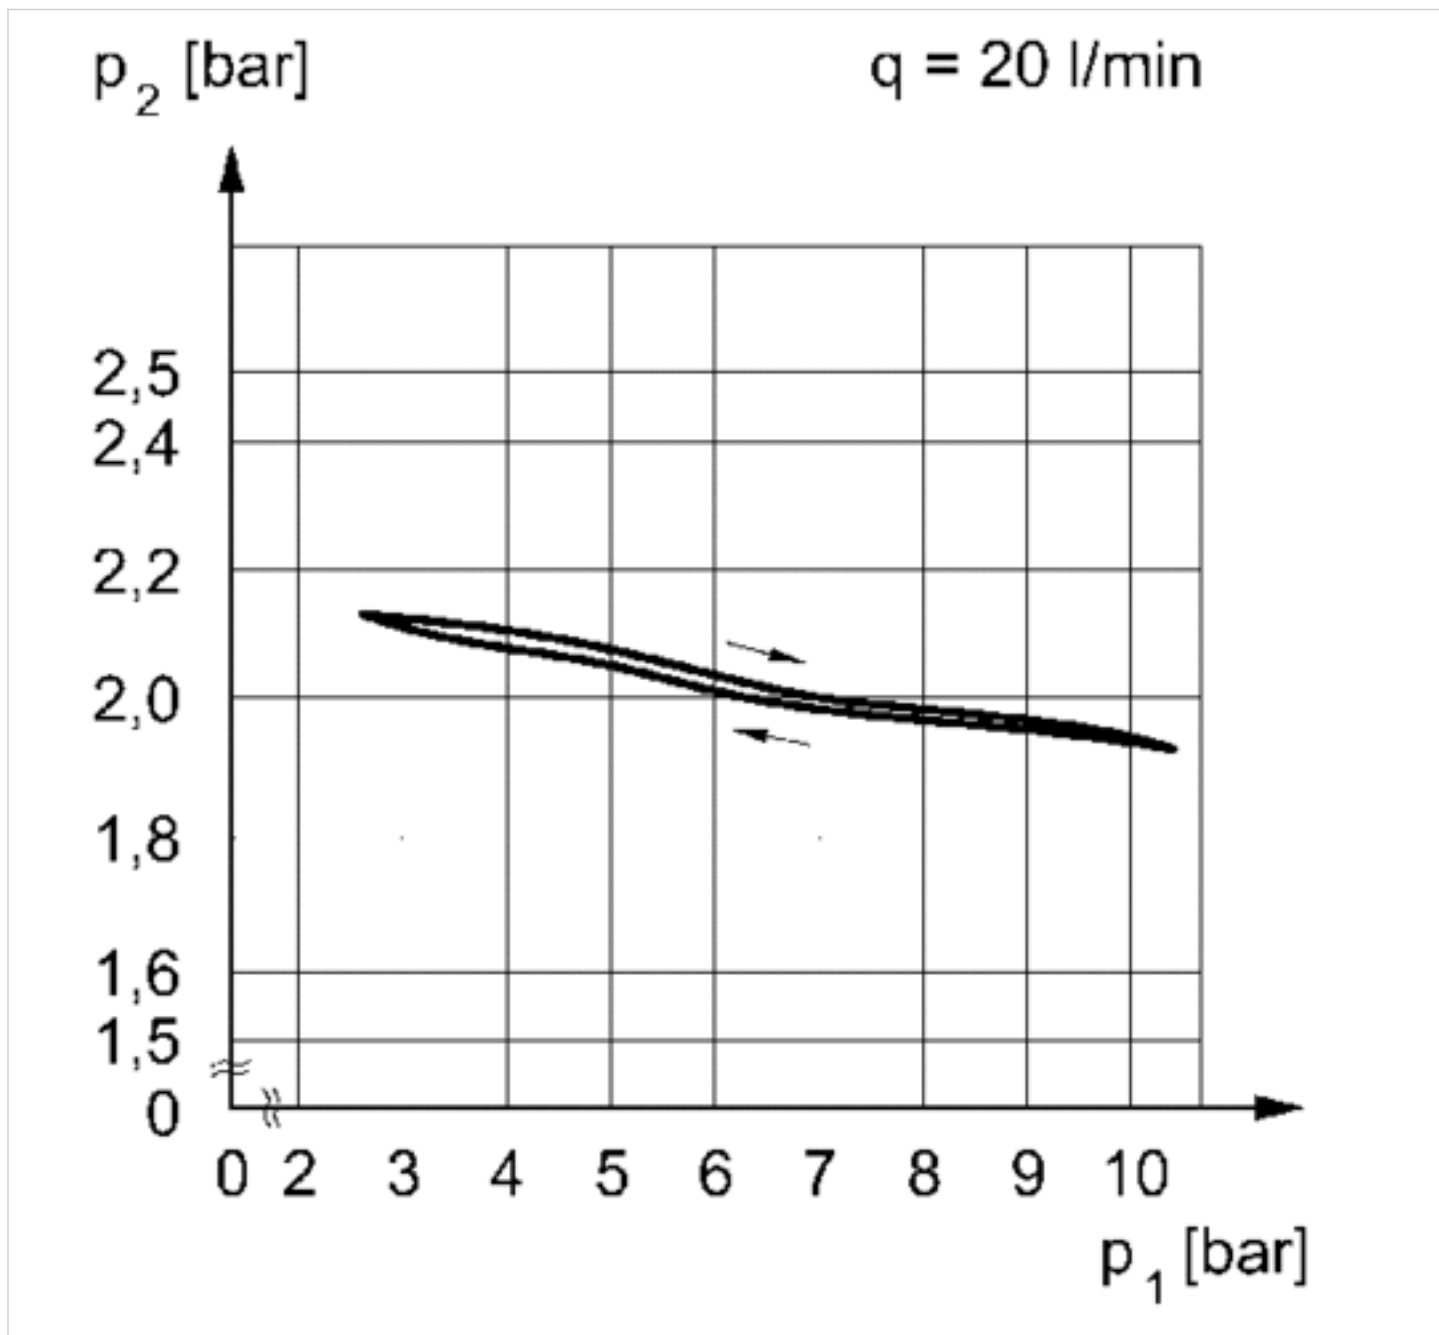

$p_1$  = working pressure  
 $p_2$  = secondary pressure  
 $q$  = flow rate

## Flow rate characteristic

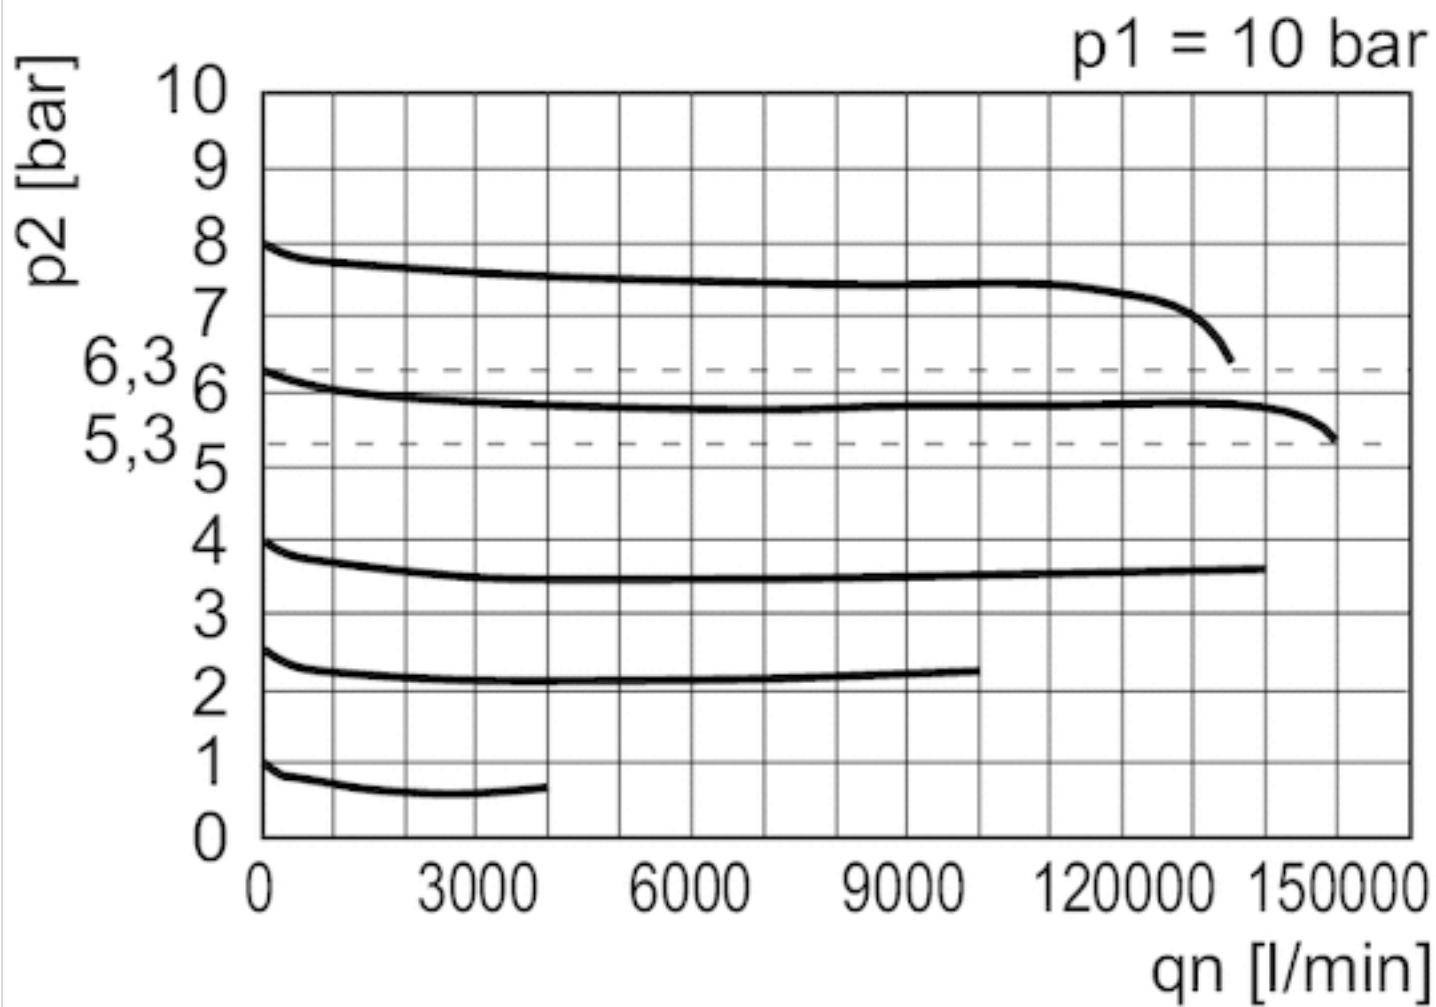

$p_1$  = Working pressure  
 $p_2$  = Secondary pressure  
 $q_n$  = Nominal flow

# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR\_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.  
2020-12



## CONSIDER IT SOLVED™