



















# Pressure regulator, Series NL2-RGS

- G 1/4 G 3/8
- Qn = 2000 l/min
- Standard pressure regulator
- Activation Mechanical
- lockable
- with key
- suitable for ATEX



Parts	Pressure regulator
Mounting orientation	Any
Certificates	suitable for ATEX
Working pressure min./max.	0,5 ... 16 bar
Ambient temperature min./max.	-10 ... 60 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Regulator type	Diaphragm-type pressure regulator Can be assembled into blocks
Regulator function	with relieving air exhaust
Adjustment range min./max.	See table below
Lock type	with key
Pressure supply	single
Activation	Mechanical
Weight	See table below

## Technical data

Part No.			Port	Flow	Adjustment range min./max.	Pressure gauge
				Qn		
0821302410			G 1/4	2000 l/min	0,1 ... 3 bar	with pressure gauge
0821302561			G 1/4	2000 l/min	0,2 ... 6 bar	with pressure gauge
0821302402			G 1/4	2000 l/min	0,5 ... 10 bar	with pressure gauge
0821302562		—	G 1/4	2000 l/min	0,1 ... 3 bar	-
0821302407		—	G 1/4	2000 l/min	0,2 ... 6 bar	-
0821302403		—	G 1/4	2000 l/min	0,5 ... 10 bar	-
0821302454			G 3/8	2000 l/min	0,1 ... 3 bar	with pressure gauge
0821302455			G 3/8	2000 l/min	0,2 ... 6 bar	with pressure gauge
0821302442			G 3/8	2000 l/min	0,5 ... 10 bar	with pressure gauge
0821302456		—	G 3/8	2000 l/min	0,1 ... 3 bar	-
0821302457		—	G 3/8	2000 l/min	0,2 ... 6 bar	-
0821302443		—	G 3/8	2000 l/min	0,5 ... 10 bar	-

Part No.	Weight
0821302410	0,41 kg
0821302561	0,41 kg
0821302402	0,41 kg
0821302562	0,325 kg
0821302407	0,325 kg
0821302403	0,325 kg

Part No.	Weight
0821302454	0,41 kg
0821302455	0,41 kg
0821302442	0,41 kg
0821302456	0,325 kg
0821302457	0,325 kg
0821302443	0,325 kg

Nominal flow Qn with secondary pressure p2 = 6 bar at  $\Delta p = 1$  bar

Suitable for use in Ex zones 1, 2, 21, 22.

## Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Suitable for use in Ex zones 1, 2, 21, 22.

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.

The rear pressure gauge connection on the pressure regulator is closed with a blanking plug, the front connection is open. Depending on the customer application, a second blanking plug may be necessary. Please order separately (see accessories).

Relieving exhaust ( $\leq 0.3$  bar over set pressure).

With rear exhaust ( $> 3$  bar ).


Recommended pre-filtering 5  $\mu$ m

## Technical information

Material	
Housing	Die cast zinc
Front plate	Acrylonitrile butadiene styrene
Seals	Acrylonitrile butadiene rubber

## Dimensions

### Dimensions

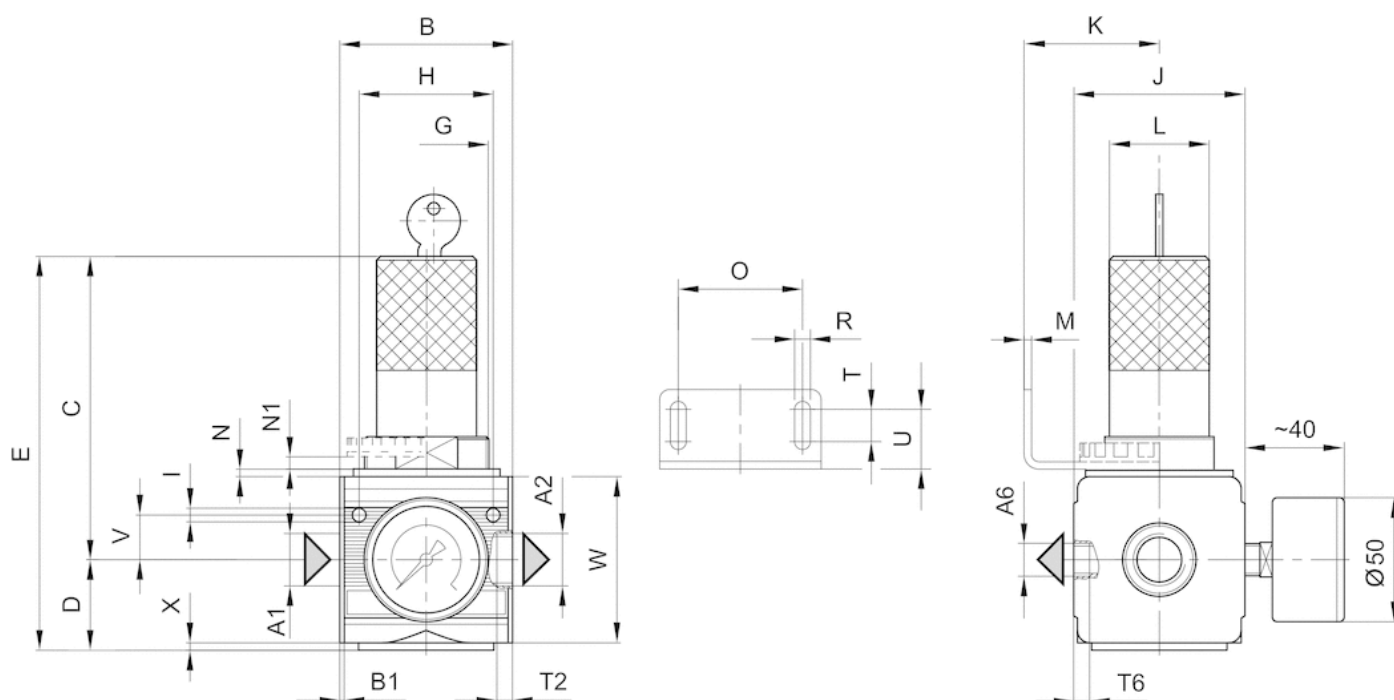

A1 = input

A2 = output


A6 = output

### Dimensions in mm

A2	A6	B	B1	C	D	E	G	H	I	J	K	L	M	N	N1	O	R	T2	T6	U	V	W	X
G 1/4	G 1/4	48	1.5	96.5	27	123.5	M30x1,5	36	4.4	47	43.5	28	3	3	3.5	38	5.4	9.5	7	18.5	12.3	52	1
G 3/8	G 1/4	48	1.5	96.5	27	123.5	M30x1,5	36	4.4	47	43.5	28	3	3	3.5	38	5.4	9.5	7	18.5	12.3	52	1


## Diagrams

## Pressure characteristics curve

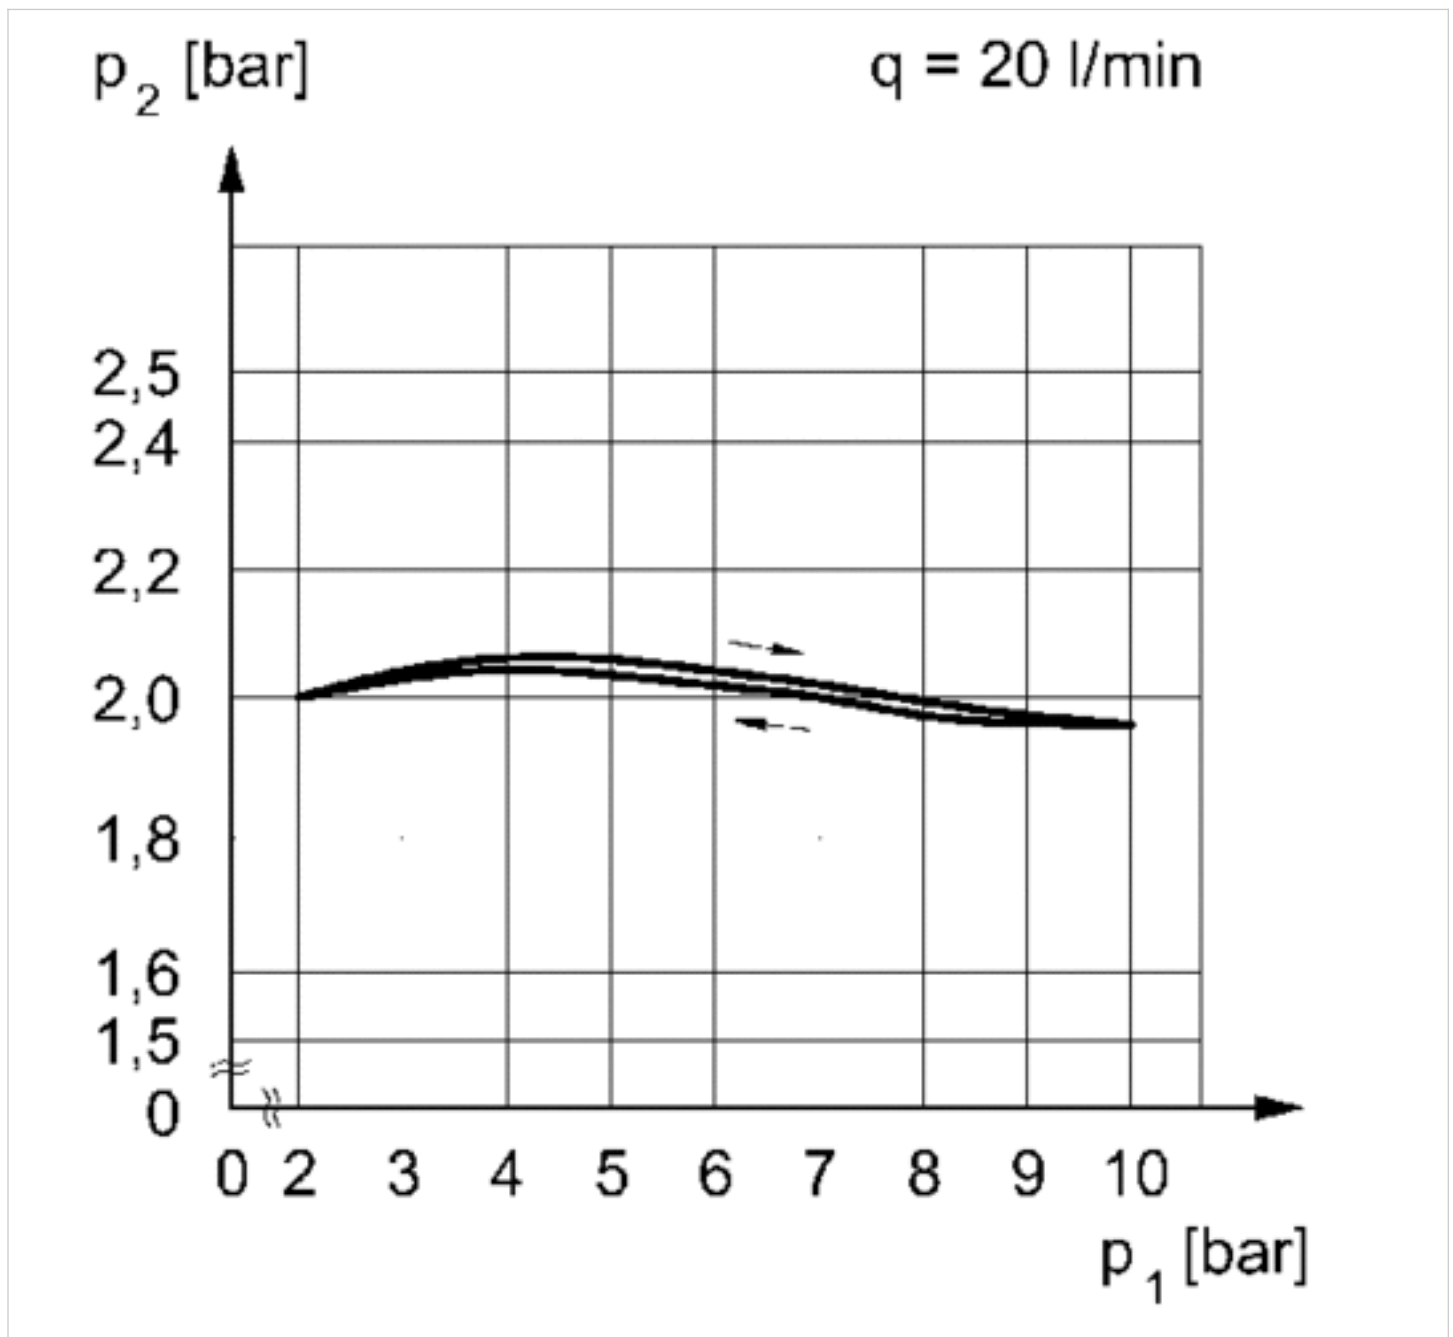

$p_1$  = working pressure  
 $p_2$  = secondary pressure  
 $q$  = flow rate

## Flow rate characteristic (setting range p2: 0.5 - 10 bar)

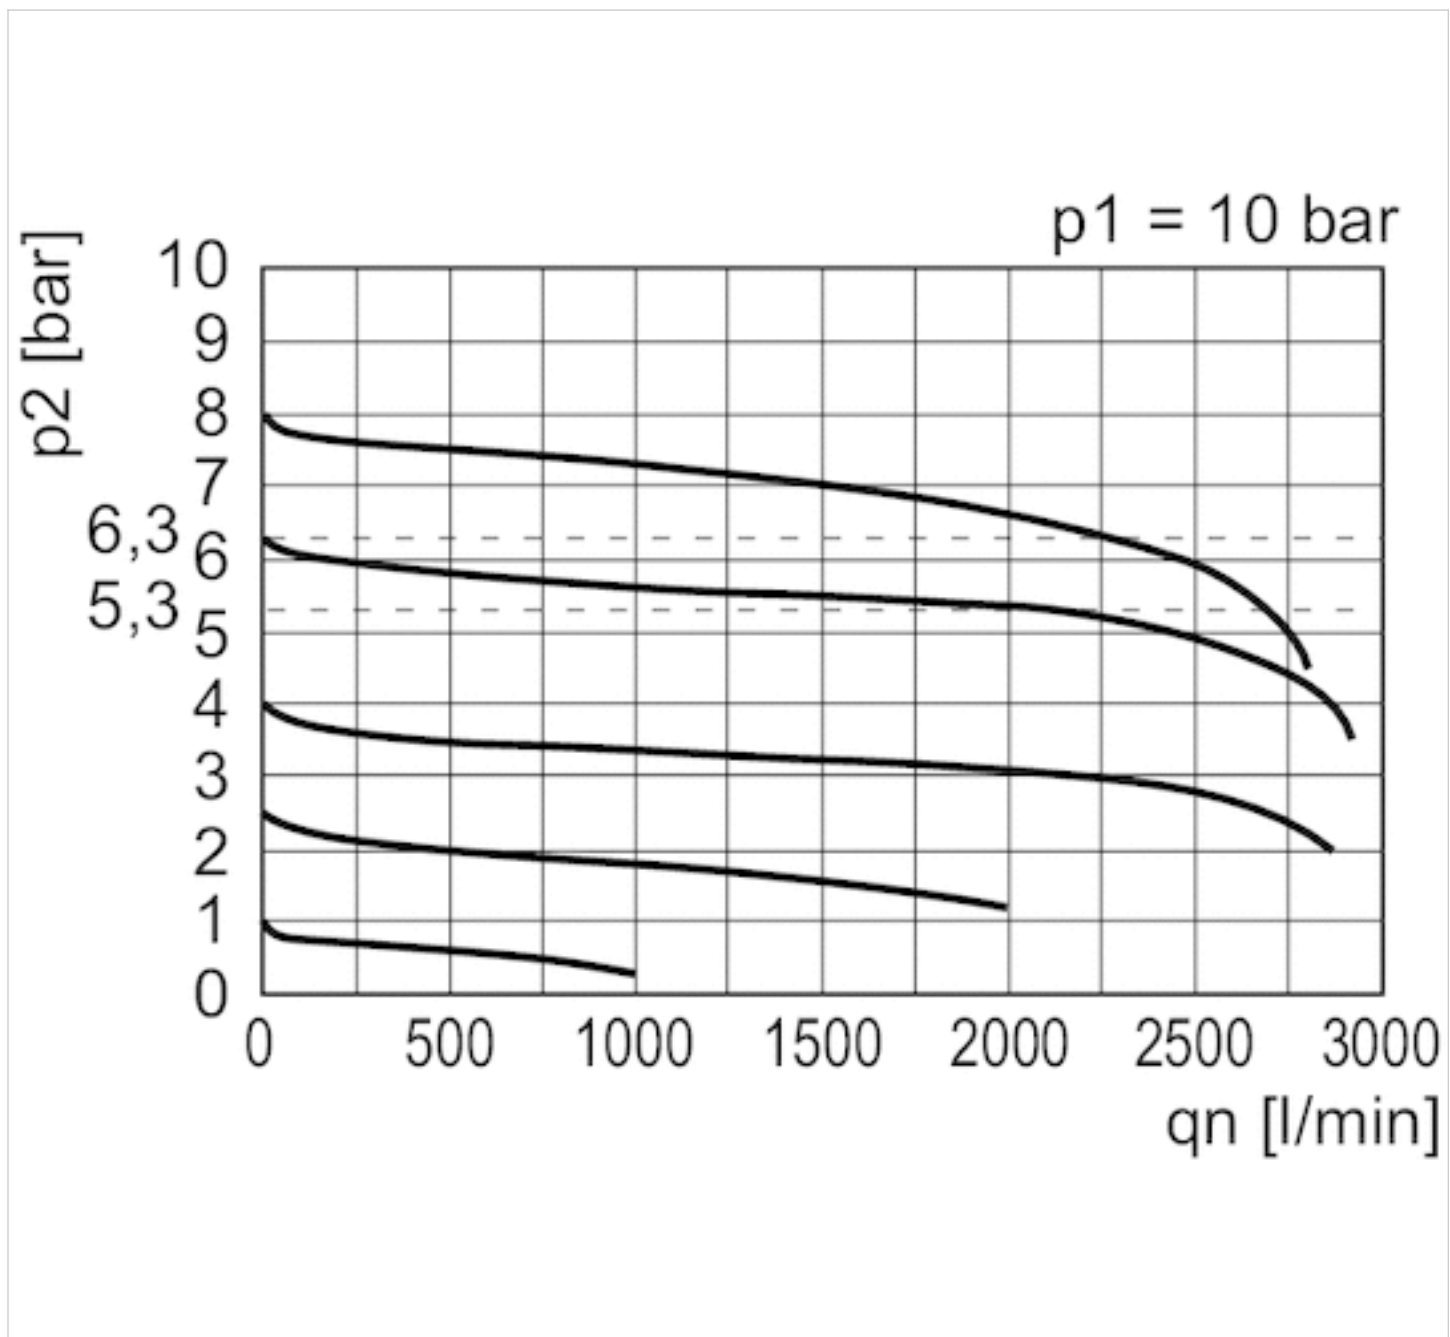

p1 = Working pressure  
p2 = Secondary pressure  
qn = Nominal flow

# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR\_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.  
2020-12



## CONSIDER IT SOLVED™