

Reservoir, Series NL2-CLS

- For filter filter pressure regulator
- Material Polycarbonate Die cast zinc



Туре Reservoir Certificates suitable for ATEX 2 ... 16 bar Working pressure min./max. Ambient temperature min./max. -10 ... 50 °C Medium temperature min./max. -10 ... 50 °C Medium Compressed air Filter reservoir volume 25 cm³ Weight See table below

Technical data

Part No.	Condensate drain	Reservoir	Weight
1827009334	semi-automatic, open without pressure	Polycarbonate	0,09 kg
1827009340	semi-automatic, open without pressure	Die cast zinc, with window	0,27 kg
1827009335	fully automatic, open without pressure	Polycarbonate	0,115 kg
1827009341	fully automatic, open without pressure	Die cast zinc, with window	0,31 kg

Part No.	Fig.
1827009334	Fig. 1
1827009340	Fig. 2
1827009335	Fig. 3
1827009341	Fig. 4

Suitable for use in Ex zones 1, 2, 21, 22.


Technical information

Material		
Reservoir	Polycarbonate Die cast zinc	
Seal	Acrylonitrile butadiene rubber	



Dimensions

Fig. 3

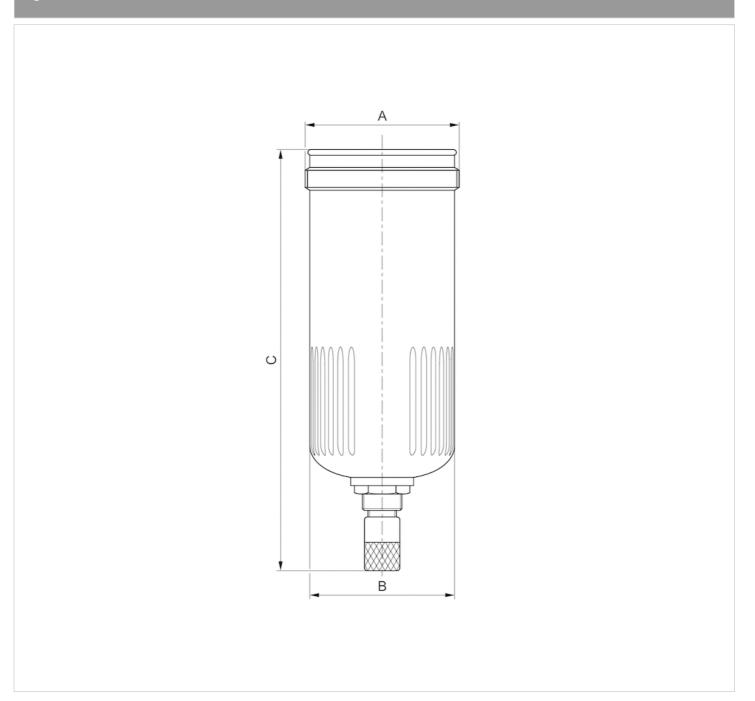





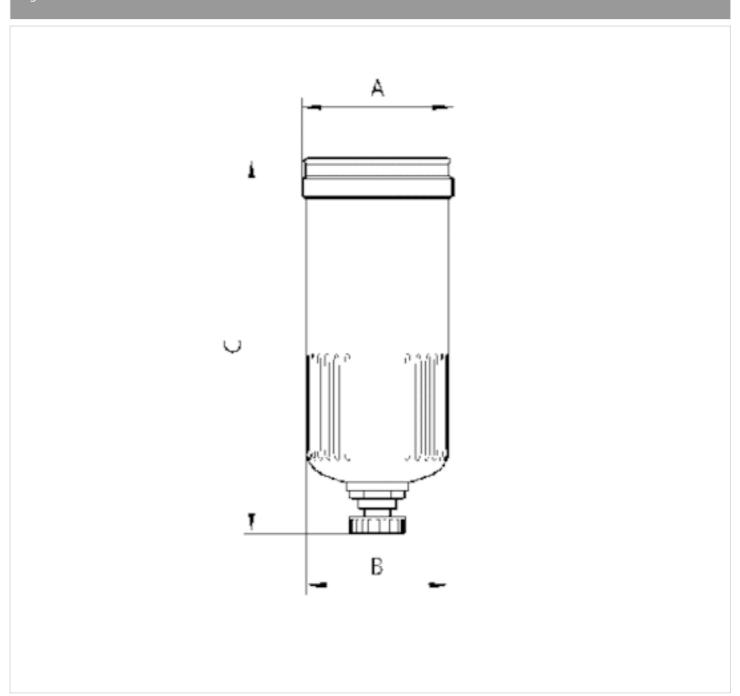




Fig. 2


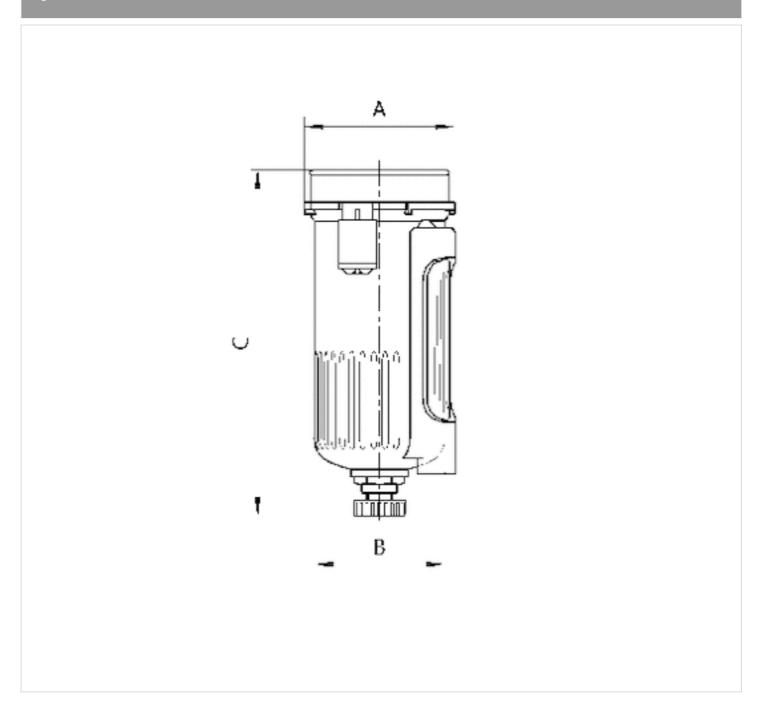




Fig. 4

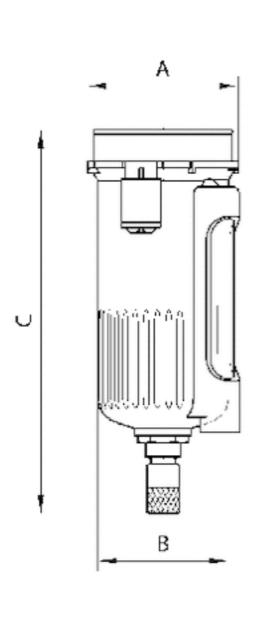

Dimensions

Part No.	A	В	С
1827009334	M36x1,5	33.2	116
1827009340	42.5	33.2	116
1827009335	M36x1,5	33.2	129
1827009341	42.5	33.2	129

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: Emerson.com/Aventics

Your local contact: Emerson.com/contactus



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and again.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners.

2020 Emerson Electric Co. All rights reserved.

