



Pressure gauge, Series PG1-SNL

- Back port
- Background color Black
- Scale color Green, White
- Viewing window Polystyrene
- Units bar
- Units psi
- suitable for ATEX





Type Bourdon tube pressure gauge

Seal Axial
Standardization EN 837-1
Class 1,6

Ambient temperature min./max. -40 ... 60 °C

Medium Compressed air

Main scale unit (outside) bar

Main scale color (outside) Green

Secondary scale unit (inside) psi

Secondary scale color (inside) White

Background color Black

Pointer color White

Weight 0,06 kg

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value	
1827231053	G 1/8	40 mm	-0,8 0 bar	-1 0 bar	-1 0 bar	0,1	-
1827231048	G 1/8	40 mm	0 1,7 bar	0 2,5 bar	0 2,5 bar	0,1	-
1827231024	G 1/8	40 mm	0 8 bar	0 10 bar	0 10 bar	0,5	1)
1827231009	G 1/8	40 mm	0 12 bar	0 16 bar	0 16 bar	0,5	1)

Order seal 1829202004 separately

1) Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Order axial seal separately




Technical information

Material					
Housing	Acrylonitrile butadiene styrene				
Thread	Brass				
Viewing window	Polystyrene				

Dimensions

Dimensions

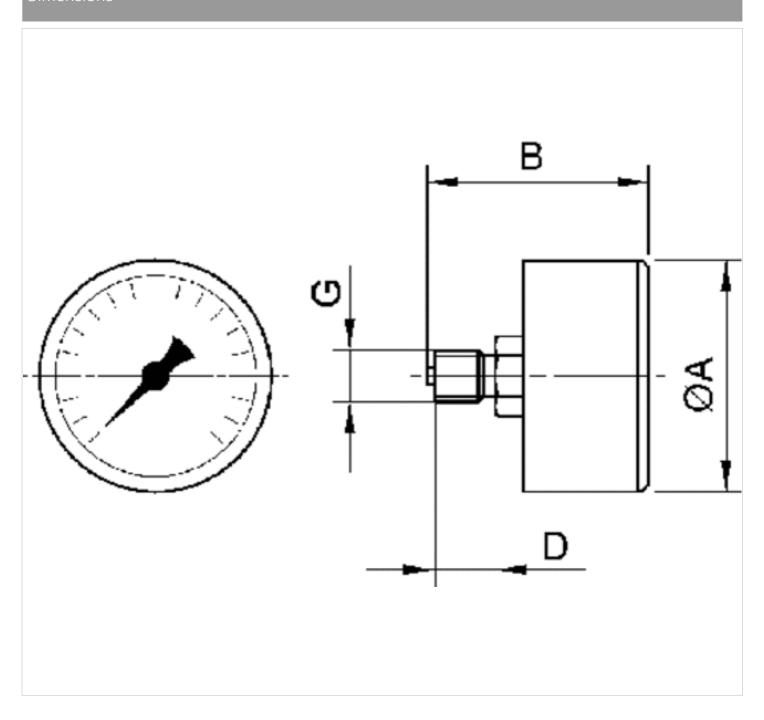



G	Nominal diameter	Ø A	В	D
G 1/8	40 mm	39	44	10

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: Emerson.com/Aventics

Your local contact: Emerson.com/contactus



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and again.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners.

2020 Emerson Electric Co. All rights reserved.

