

QR1-S-RVT standard series

- Elbow fitting
- External thread
- M5 G 1/8 G 1/4 G 3/8 G 1/2
- push-in fitting
- Ø 4 Ø 6 Ø 8 Ø 10 Ø 12 Ø 14 Ø 16
- QR1-S-RVT



Working pressure min./max.

-0,95 ... 10 bar

Ambient temperature min./max.

0 ... 60 °C

Weight per piece

See table below

Technical data

Part No.	Port G	Port D	Delivery unit	Weight per piece
2122004050	M5	Ø 4	10 piece	0,006 kg
2122006050	M5	Ø 6	10 piece	0,006 kg
2122004180	G 1/8	Ø 4	10 piece	0,012 kg
2122006180	G 1/8	Ø 6	10 piece	0,013 kg
2122008180	G 1/8	Ø 8	10 piece	0,015 kg
R412005094	G 1/8	Ø 10	10 piece	0,028 kg
R412005095	G 1/8	Ø 12	10 piece	0,039 kg
2122004140	G 1/4	Ø 4	10 piece	0,017 kg
2122006140	G 1/4	Ø 6	10 piece	0,019 kg
2122008140	G 1/4	Ø 8	10 piece	0,023 kg
2122010140	G 1/4	Ø 10	10 piece	0,029 kg
2122012140	G 1/4	Ø 12	10 piece	0,042 kg
R412005092	G 3/8	Ø 6	10 piece	0,031 kg
2122008380	G 3/8	Ø 8	10 piece	0,033 kg
2122010380	G 3/8	Ø 10	10 piece	0,04 kg
2122012380	G 3/8	Ø 12	10 piece	0,044 kg
2122014380	G 3/8	Ø 14	5 piece	0,048 kg
R412005097	G 3/8	Ø 16	5 piece	0,061 kg
R412005093	G 1/2	Ø 8	10 piece	0,049 kg
2122010120	G 1/2	Ø 10	10 piece	0,05 kg
2122012120	G 1/2	Ø 12	10 piece	0,056 kg
2122014120	G 1/2	Ø 14	5 piece	0,066 kg
R412005098	G 1/2	Ø 16	5 piece	0,076 kg

Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined

Thread seal with captive O-ring


For further information about assembling and tolerances of adaptable tubing can be found in the “Technical information” document (available in the MediaCentre).

Technical information

Material	
Material	nickel-plated
Housing	Polybutyleneterephthalate
Seal	Acrylonitrile butadiene rubber
Tooth lock washer	Stainless steel
Release ring	Polyoxymethylene
Release ring holder	Die cast zinc Brass, nickel-plated
Thread	Brass, nickel-plated

Dimensions

Dimensions

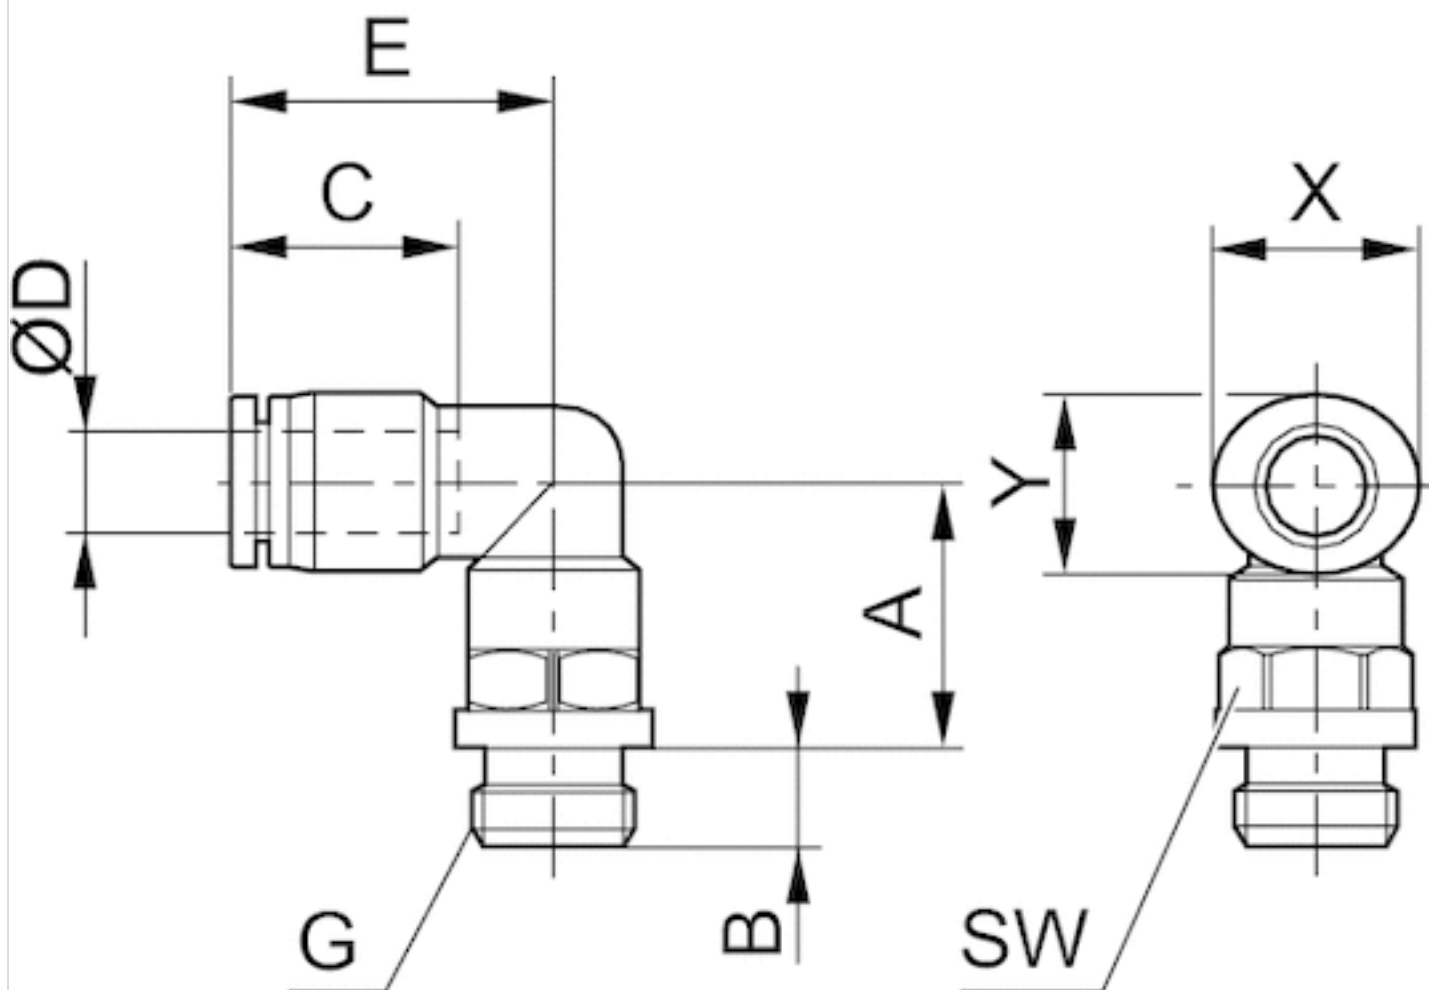

Dimensions

Part No.	Port D	Port G	A	B	C	E	SW	X	Y
2122004050	Ø 4	M5	11.2	4	16	18.7	8	10	12
2122006050	Ø 6	M5	12.2	4	16	20	8	14	12
2122004180	Ø 4	G 1/8	9.5	5	16	18.5	13	12	10
2122006180	Ø 6	G 1/8	10.7	5	17	20.3	13	14	12
2122008180	Ø 8	G 1/8	14.4	5	18.5	22.6	13	16	14
R412005094	Ø 10	G 1/8	16.5	5	21	27	16	19	17
R412005095	Ø 12	G 1/8	18.2	5	22.5	29.2	16	23	21

Part No.	Port D	Port G	A	B	C	E	SW	X	Y
2122004140	Ø 4	G 1/4	9.5	6	16	18.5	16	12	10
2122006140	Ø 6	G 1/4	10.7	6	17	20.3	16	14	12
2122008140	Ø 8	G 1/4	11.5	6	18.5	22.6	16	16	14
2122010140	Ø 10	G 1/4	16.5	6	21	27	16	19	17
2122012140	Ø 12	G 1/4	18.3	6	22.5	29.2	16	23	21
R412005092	Ø 6	G 3/8	11.2	7	17	20.3	20	14	12
2122008380	Ø 8	G 3/8	11.5	7	18.5	22.6	20	16	14
2122010380	Ø 10	G 3/8	13.6	7	21	27	20	19	16
2122012380	Ø 12	G 3/8	15.3	7	22.5	29.2	20	23	21
2122014380	Ø 14	G 3/8	23.1	7	24.6	32.1	20	25	23
R412005097	Ø16	G 3/8	24.2	7	24.8	33.3	20	27	24
R412005093	Ø 8	G 1/2	12.5	8.5	18.5	22.6	24	16	14
2122010120	Ø 10	G 1/2	14.1	8.5	21	27	24	19	14
2122012120	Ø 12	G 1/2	15.8	8.5	22.5	29.2	24	23	21
2122014120	Ø 14	G 1/2	17.1	8.5	24.6	32.1	24	25	23
R412005098	Ø16	G 1/2	18.2	8.5	24.8	33.3	24	27	24

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: Emerson.com/Aventics

Your local contact: Emerson.com/contactus



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™