






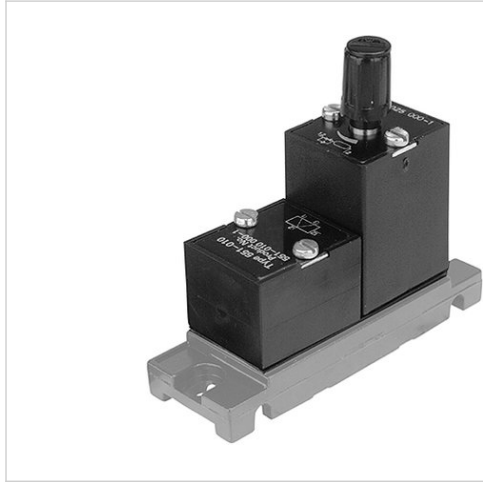

# Pneumatic timer

- for opening or closing delay
- $Q_n = 120 \text{ l/min}$
- for 551



Working pressure min./max.	See table below
Control pressure min./max.	See table below
Ambient temperature min./max.	-20 ... 70 °C
Medium temperature min./max.	-20 ... 70 °C
Medium	Compressed air
Max. particle size	5 µm
Oil content of compressed air	0 ... 1 mg/m³
Time delay	10 s
Weight	See table below

## Technical data

Part No.			Logic function	Flow	Working pressure min./max.	Control pressure min./max.
				$Q_n$		
5510250000		-	-	-	1 ... 10 bar	-
5510250100		NC	YES	120 l/min	1,5 ... 10 bar	1,05 ... 7 bar
5510251100		NO	NOT (NO)	120 l/min	1,5 ... 10 bar	1,05 ... 7 bar
5510260000		-	closing delay	-	1 ... 10 bar	-
5510260100		NC	YES	120 l/min	1,5 ... 10 bar	1,05 ... 7 bar
5510261100		NO	NOT (NO)	120 l/min	1,5 ... 10 bar	1,05 ... 7 bar

Part No.	Throttle	Weight	Fig.
5510250000	with throttle	0,08 kg	Fig. 1
5510250100	with throttle	0,125 kg	Fig. 2
5510251100	with throttle	0,125 kg	Fig. 2
5510260000	with throttle	0,08 kg	Fig. 1
5510260100	with throttle	0,125 kg	Fig. 2
5510261100	with throttle	0,125 kg	Fig. 2

Nominal flow  $Q_n$  at 6 bar and  $\Delta p = 1 \text{ bar}$

## Technical information

Material	
Housing	Polyoxymethylene
Seals	Acrylonitrile butadiene rubber

## Dimensions

Fig. 1


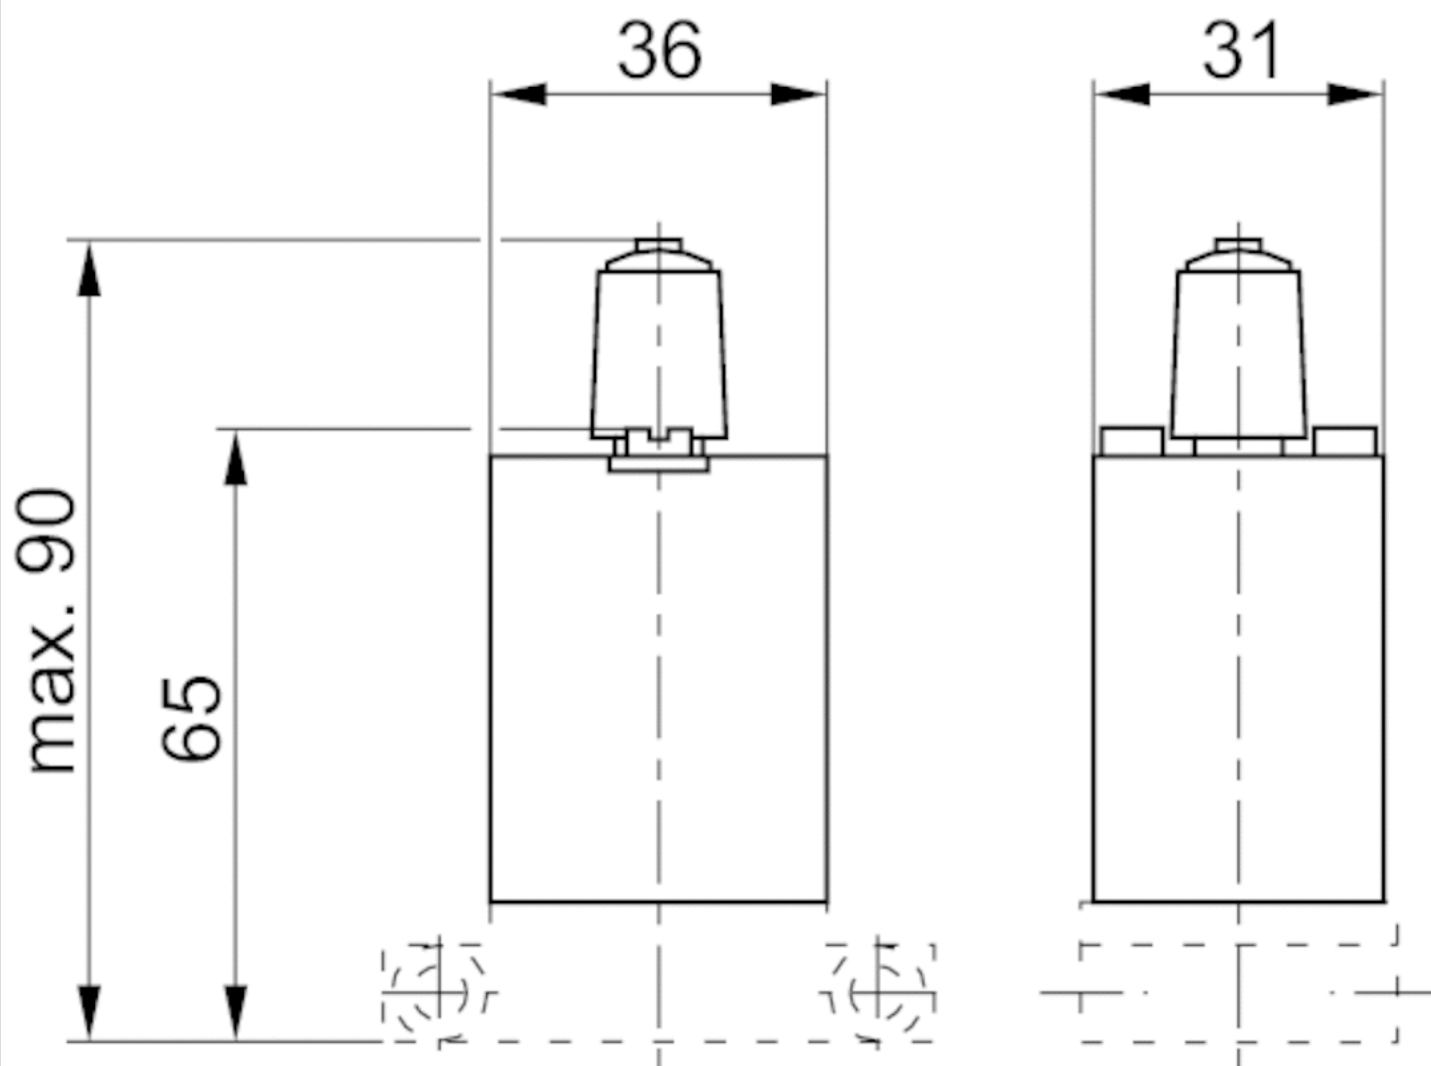


Fig. 2



# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management

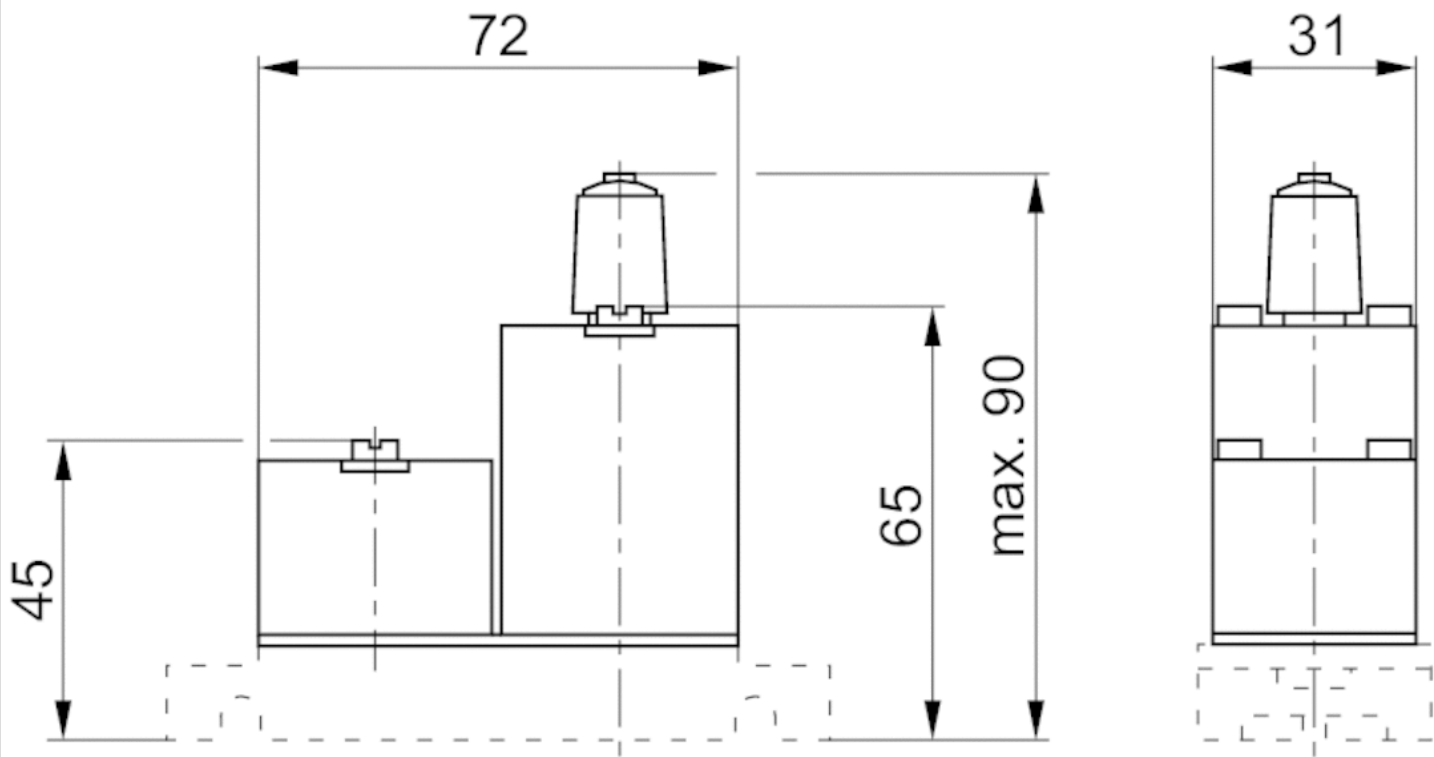

Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR\_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2021 Emerson Electric Co. All rights reserved.  
2021-06



## CONSIDER IT SOLVED™