







5/2-directional valve, Series 740

- ATEX optional
- 5/2
- Qn = 1100 l/min
- Pipe connection
- Compressed air connection output : Ø 10x1
- Electrical connection : Plug, EN 175301-803, form A
- Can be assembled into blocks
- Manual override : with detent
- double solenoid
- Pilot : Internal



Type	Diaphragm poppet valve
Activation	Electrically
Pilot	Internal
Sealing principle	Soft sealing
Blocking principle	Plate principle Single base plate principle
Working pressure min./max.	1,5 ... 10 bar
Ambient temperature min./max.	-15 ... 50 °C
Medium temperature min./max.	-15 ... 50 °C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air	0 ... 5 mg/m³
Nominal flow Qn	1100 l/min
Connector standard	EN 175301-803:2006
Protection class with connection	IP65
Reverse polarity protection	Protected against polarity reversal
Compatibility index	See table below
Duty cycle	100 %
Typ. switch-on time	40 ms
Mounting on manifold strip	PRS strip
Weight	See table below

Technical data

Part No.		MO	Compressed air connection	
			Input	Output
5727480220			Ø 10x1	Ø 10x1
5727485280			Ø 10x1	Ø 10x1
5727485302			Ø 10x1	Ø 10x1

Part No.	Compressed air connection	Operational voltage	Operational voltage
	Exhaust		
		DC	AC 50 Hz
5727480220	M14x1	24 V	-
5727485280	M14x1	-	230 V
5727485302	M14x1	-	-

Part No.	Operational voltage	Voltage tolerance		
		DC	AC 50 Hz	AC 60 Hz
5727480220	-	-10% / +10%	-	-
5727485280	230 V	-	-20% / +10%	-10% / +20%
5727485302	-	-	-	-

Part No.	Power consumption		Holding power		Switch-on power
	DC		AC 50 Hz	AC 60 Hz	AC 50 Hz
5727480220	2,1 W		-	-	-
5727485280	2,1 W		4,18 VA	3,3 VA	6,6 VA
5727485302	2,1 W		-	-	-

Part No.	Switch-on power	Compatibility index	Throttle	Valve plug connector
	AC 60 Hz			
5727480220	-	13 14	with throttle	Without valve plug connector
5727485280	5,5 VA	14	with throttle	Without valve plug connector
5727485302	-	14	with throttle	-

Part No.	basic valve with electrical connector	Reverse polarity protection
5727480220	-	Protected against polarity reversal
5727485280	-	Protected against polarity reversal
5727485302	Basic valve without coil	-

Part No.	ATEX	Weight
5727480220	-	0,514 kg
5727485280	-	0,52 kg
5727485302	ATEX optional	0,327 kg

Nominal flow Q_n at 6 bar and Δp = 1 bar

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
The oil content of compressed air must remain constant during the life cycle.
Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in the MediaCentre).

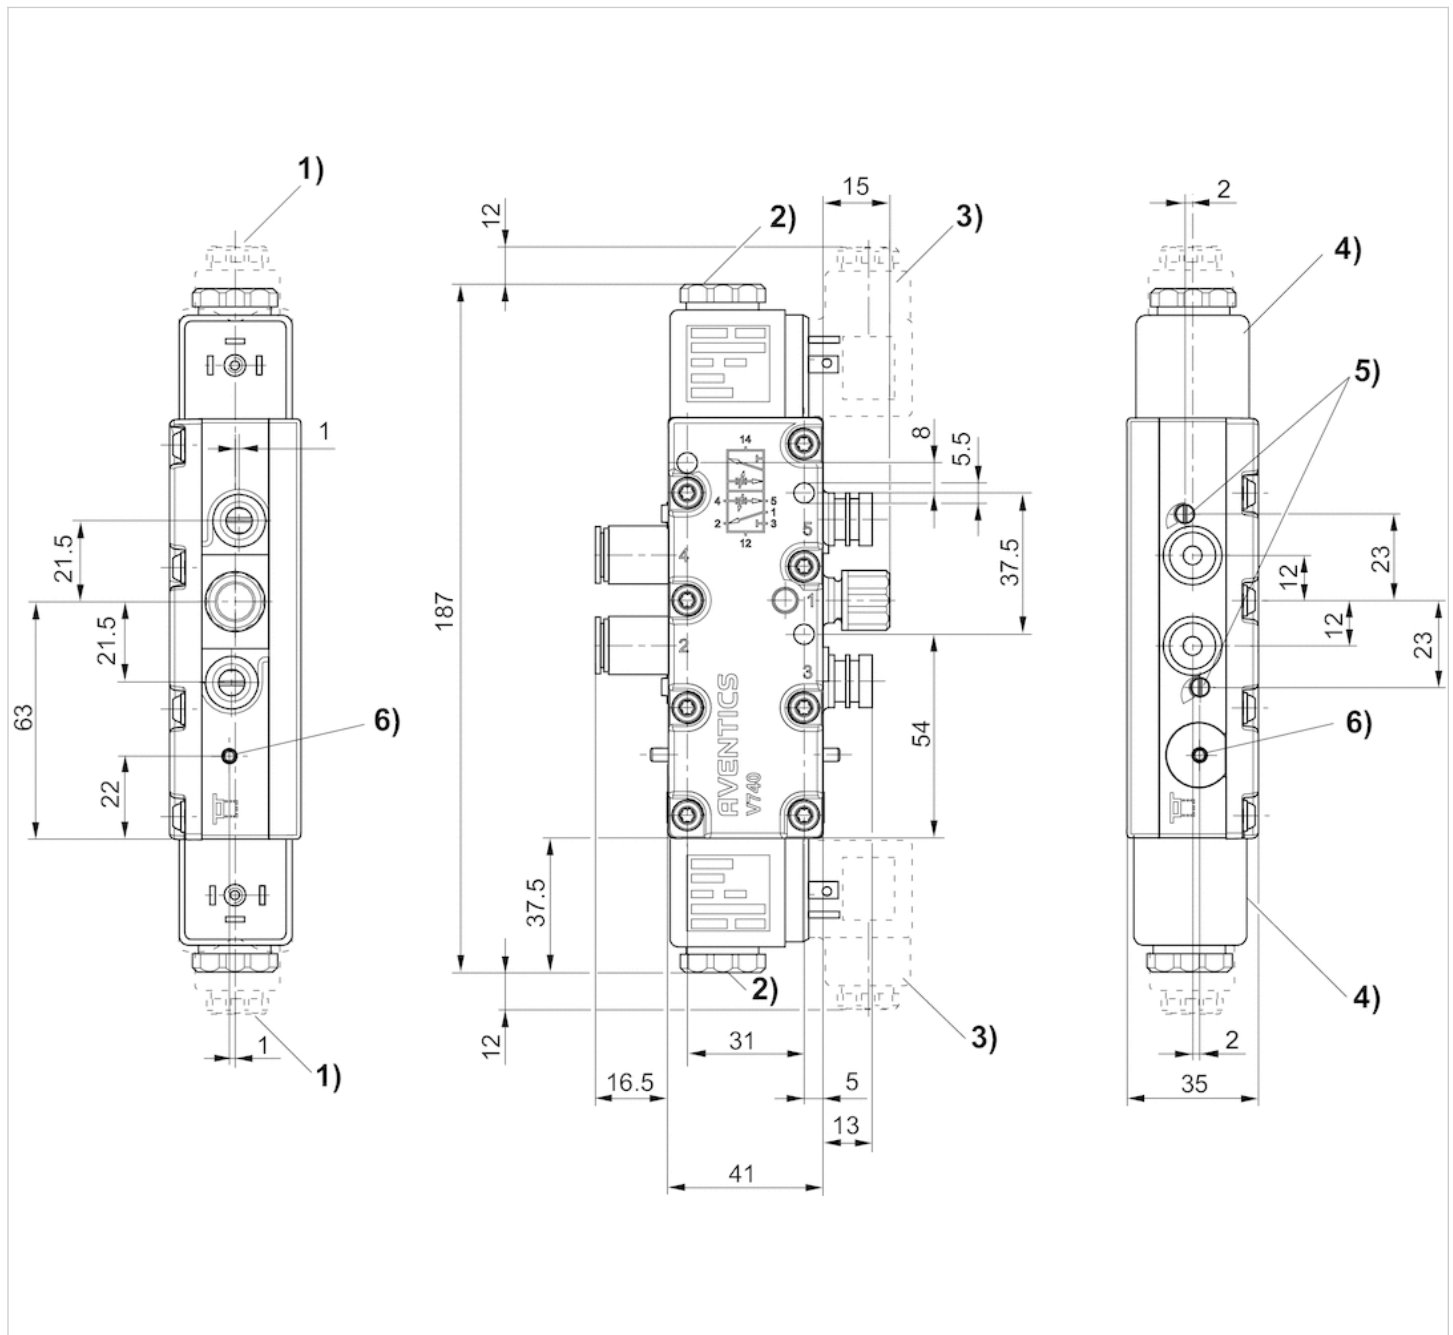
ATEX optional: ATEX version can be produced by combining the basic valve without coil with an ATEX coil. ATEX ID: see ATEX coils catalog page.

Technical information

Material	
Housing	Polyoxymethylene
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions



- 1) Gland fitting M16x1.52) M5 internal thread accessible under cap3) Valve plug connector can be rotated at 90° intervals4) Coil can be plugged at 45° intervals5) Flow control screw for exhausts 5 (R) and 3 (S)6) Manual override and position indicator

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™