
















5/3-directional valve, Series CD01-PA

- ISO 15407-1
- 26 mm
- 5/3
- pressurized center exhausted center closed center
- Qn = 650 l/min
- Compressed air connection output base plate DIN ISO 15407-1
- Electrical connection Plug, EN 175301-803, form C
- Manual override with detent without detent



Type	Spool valve, positive overlapping
Sealing principle	Soft sealing
Connection type	Plate connection
Standards	ISO 15407-1, 26 mm
Connector standard	EN 175301-803, form C
Certificates	Free of substances that impair surface wetting in the coating process
Working pressure min./max.	See table below
Control pressure min./max.	See table below
Ambient temperature min./max.	-15 ... 50 °C
Medium temperature min./max.	-15 ... 50 °C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air	0 ... 5 mg/m³
Nominal flow Qn	See table below
Compressed air connection	according to ISO 15407-1
Protection class with connection	IP65
Duty cycle	100 %
Typ. switch-on time	See table below
Typ. switch-off time	See table below
Mounting screw	M4 with hexagon socket
Mounting screw tightening torque	2,5 Nm
Weight	0,27 kg

Technical data

Part No.		MO		Operational voltage DC
5763800220			pressurized center	24 V
5763800620			pressurized center	24 V
5763800920		-	pressurized center	24 V
5763805270			pressurized center	-
5763805670			pressurized center	-
5763850220			pressurized center	24 V
5763850620			pressurized center	24 V
5763855270			pressurized center	-
5763855670			pressurized center	-
5763810220			exhausted center	24 V
5763810620			exhausted center	24 V
5763810920		-	exhausted center	24 V
5763815220			exhausted center	-
5763815270			exhausted center	-
5763815670			exhausted center	-
5763815280			exhausted center	-
5763860220			exhausted center	24 V
5763860620			exhausted center	24 V
5763865270			exhausted center	-
5763865670			exhausted center	-
5763820210			closed center	12 V
5763820220			closed center	24 V
5763820620			closed center	24 V
5763825270			closed center	-
5763825670			closed center	-
5763825280			closed center	-
5763870220			closed center	24 V
5763870620			closed center	24 V
5763875270			closed center	-
5763875670			closed center	-

Part No.	Operational voltage AC 50 Hz	Operational voltage AC 60 Hz	Voltage tolerance DC
5763800220	-	-	-10% / +10%
5763800620	-	-	-10% / +10%
5763800920	-	-	-10% / +10%
5763805270	110 V	110 V	-
5763805670	110 V	110 V	-
5763850220	-	-	-10% / +10%
5763850620	-	-	-10% / +10%
5763855270	110 V	110 V	-
5763855670	110 V	110 V	-
5763810220	-	-	-10% / +10%

Part No.	Operational voltage AC 50 Hz	Operational voltage AC 60 Hz	Voltage tolerance DC
5763810620	-	-	-10% / +10%
5763810920	-	-	-10% / +10%
5763815220	24 V	24 V	-
5763815270	110 V	110 V	-
5763815670	110 V	110 V	-
5763815280	230 V	230 V	-
5763860220	-	-	-10% / +10%
5763860620	-	-	-10% / +10%
5763865270	110 V	110 V	-
5763865670	110 V	110 V	-
5763820210	-	-	-10% / +10%
5763820220	-	-	-10% / +10%
5763820620	-	-	-10% / +10%
5763825270	110 V	110 V	-
5763825670	110 V	110 V	-
5763825280	230 V	230 V	-
5763870220	-	-	-10% / +10%
5763870620	-	-	-10% / +10%
5763875270	110 V	110 V	-
5763875670	110 V	110 V	-

Part No.	Voltage tolerance AC 50 Hz	Voltage tolerance AC 60 Hz	Power consumption DC	Holding power AC 50 Hz
5763800220	-	-	1,6 W	-
5763800620	-	-	1,6 W	-
5763800920	-	-	2,06 W	-
5763805270	-10% / +15%	-10% / +15%	-	3 VA
5763805670	-10% / +15%	-10% / +15%	-	3 VA
5763850220	-	-	1,6 W	-
5763850620	-	-	1,6 W	-
5763855270	-10% / +15%	-10% / +15%	-	3 VA
5763855670	-10% / +15%	-10% / +15%	-	3 VA
5763810220	-	-	1,6 W	-
5763810620	-	-	1,6 W	-
5763810920	-	-	2,06 W	-
5763815220	-10% / +15%	-10% / +15%	-	2,2 VA
5763815270	-10% / +15%	-10% / +15%	-	3 VA
5763815670	-10% / +15%	-10% / +15%	-	3 VA
5763815280	-10% / +15%	-10% / +15%	-	2,3 VA
5763860220	-	-	1,6 W	-
5763860620	-	-	1,6 W	-
5763865270	-10% / +15%	-10% / +15%	-	3 VA
5763865670	-10% / +15%	-10% / +15%	-	3 VA
5763820210	-	-	1,6 W	-
5763820220	-	-	1,6 W	-
5763820620	-	-	1,6 W	-

Part No.	Voltage tolerance AC 50 Hz	Voltage tolerance AC 60 Hz	Power consumption DC	Holding power AC 50 Hz
5763825270	-10% / +15%	-10% / +15%	-	3 VA
5763825670	-10% / +15%	-10% / +15%	-	3 VA
5763825280	-10% / +15%	-10% / +15%	-	2,3 VA
5763870220	-	-	1,6 W	-
5763870620	-	-	1,6 W	-
5763875270	-10% / +15%	-10% / +15%	-	3 VA
5763875670	-10% / +15%	-10% / +15%	-	3 VA

Part No.	Holding power AC 60 Hz	Switch-on power AC 50 Hz	Switch-on power AC 60 Hz	Pilot	Nominal flow Qn
5763800220	-	-	-	Internal	-
5763800620	-	-	-	Internal	-
5763800920	-	-	-	Internal	-
5763805270	2,4 VA	4,2 VA	3,4 VA	Internal	-
5763805670	2,4 VA	4,2 VA	3,4 VA	Internal	-
5763850220	-	-	-	External	-
5763850620	-	-	-	External	-
5763855270	2,4 VA	4,2 VA	3,4 VA	External	-
5763855670	2,4 VA	4,2 VA	3,4 VA	External	-
5763810220	-	-	-	Internal	-
5763810620	-	-	-	Internal	-
5763810920	-	-	-	Internal	-
5763815220	1,85 VA	3 VA	2,6 VA	Internal	-
5763815270	2,4 VA	4,2 VA	3,4 VA	Internal	-
5763815670	2,4 VA	4,2 VA	3,4 VA	Internal	-
5763815280	2 VA	3,2 VA	2,8 VA	Internal	-
5763860220	-	-	-	External	-
5763860620	-	-	-	External	-
5763865270	2,4 VA	4,2 VA	3,4 VA	External	-
5763865670	2,4 VA	4,2 VA	3,4 VA	External	-
5763820210	-	-	-	Internal	650 l/min
5763820220	-	-	-	Internal	650 l/min
5763820620	-	-	-	Internal	650 l/min
5763825270	2,4 VA	4,2 VA	3,4 VA	Internal	650 l/min
5763825670	2,4 VA	4,2 VA	3,4 VA	Internal	650 l/min
5763825280	2 VA	3,2 VA	2,8 VA	Internal	650 l/min
5763870220	-	-	-	External	650 l/min
5763870620	-	-	-	External	650 l/min
5763875270	2,4 VA	4,2 VA	3,4 VA	External	650 l/min
5763875670	2,4 VA	4,2 VA	3,4 VA	External	650 l/min

Part No.	Nominal flow 1 ► 2	Nominal flow 2 ► 3	Working pressure min./max.
5763800220	750 l/min	650 l/min	3 ... 10 bar
5763800620	750 l/min	650 l/min	3 ... 10 bar
5763800920	750 l/min	650 l/min	3 ... 16 bar
5763805270	750 l/min	650 l/min	3 ... 10 bar

Part No.	Nominal flow 1 ► 2	Nominal flow 2 ► 3	Working pressure min./max.
5763805670	750 l/min	650 l/min	3 ... 10 bar
5763850220	750 l/min	650 l/min	-0,95 ... 16 bar
5763850620	750 l/min	650 l/min	-0,95 ... 16 bar
5763855270	750 l/min	650 l/min	-0,95 ... 16 bar
5763855670	750 l/min	650 l/min	-0,95 ... 16 bar
5763810220	650 l/min	750 l/min	3 ... 10 bar
5763810620	650 l/min	750 l/min	3 ... 10 bar
5763810920	650 l/min	750 l/min	3 ... 16 bar
5763815220	650 l/min	750 l/min	3 ... 10 bar
5763815270	650 l/min	750 l/min	3 ... 10 bar
5763815670	650 l/min	750 l/min	3 ... 10 bar
5763815280	650 l/min	750 l/min	3 ... 10 bar
5763860220	650 l/min	750 l/min	-0,95 ... 16 bar
5763860620	650 l/min	750 l/min	-0,95 ... 16 bar
5763865270	650 l/min	750 l/min	-0,95 ... 16 bar
5763865670	650 l/min	750 l/min	-0,95 ... 16 bar
5763820210	650 l/min	650 l/min	3 ... 10 bar
5763820220	650 l/min	650 l/min	3 ... 10 bar
5763820620	650 l/min	650 l/min	3 ... 10 bar
5763825270	650 l/min	650 l/min	3 ... 10 bar
5763825670	650 l/min	650 l/min	3 ... 10 bar
5763825280	650 l/min	650 l/min	3 ... 10 bar
5763870220	650 l/min	650 l/min	-0,95 ... 16 bar
5763870620	650 l/min	650 l/min	-0,95 ... 16 bar
5763875270	650 l/min	650 l/min	-0,95 ... 16 bar
5763875670	650 l/min	650 l/min	-0,95 ... 16 bar

Part No.	Control pressure min./max.	Typ. switch-on time	Typ. switch-off time
5763800220	3 ... 10 bar	27 ms	55 ms
5763800620	3 ... 10 bar	27 ms	55 ms
5763800920	3 ... 16 bar	27 ms	55 ms
5763805270	3 ... 10 bar	27 ms	55 ms
5763805670	3 ... 10 bar	27 ms	55 ms
5763850220	3 ... 10 bar	27 ms	55 ms
5763850620	3 ... 10 bar	27 ms	55 ms
5763855270	3 ... 10 bar	27 ms	55 ms
5763855670	3 ... 10 bar	27 ms	55 ms
5763810220	3 ... 10 bar	24 ms	58 ms
5763810620	3 ... 10 bar	24 ms	58 ms
5763810920	3 ... 16 bar	24 ms	58 ms
5763815220	3 ... 10 bar	24 ms	58 ms
5763815270	3 ... 10 bar	24 ms	58 ms
5763815670	3 ... 10 bar	24 ms	58 ms
5763815280	3 ... 10 bar	24 ms	58 ms
5763860220	3 ... 10 bar	24 ms	58 ms
5763860620	3 ... 10 bar	24 ms	58 ms

Part No.	Control pressure min./max.	Typ. switch-on time	Typ. switch-off time
5763865270	3 ... 10 bar	24 ms	58 ms
5763865670	3 ... 10 bar	24 ms	58 ms
5763820210	3 ... 10 bar	24 ms	49 ms
5763820220	3 ... 10 bar	24 ms	49 ms
5763820620	3 ... 10 bar	24 ms	49 ms
5763825270	3 ... 10 bar	24 ms	49 ms
5763825670	3 ... 10 bar	24 ms	49 ms
5763825280	3 ... 10 bar	24 ms	49 ms
5763870220	3 ... 10 bar	24 ms	49 ms
5763870620	3 ... 10 bar	24 ms	49 ms
5763875270	3 ... 10 bar	24 ms	49 ms
5763875670	3 ... 10 bar	24 ms	49 ms

Part No.	Electrical connection Pilot valve	Power consumption
5763800220	Plug EN 175301-803, form C	-
5763800620	Plug EN 175301-803, form C	-
5763800920	Plug EN 175301-803, form C	Low power consumption
5763805270	Plug EN 175301-803, form C	-
5763805670	Plug EN 175301-803, form C	-
5763850220	Plug EN 175301-803, form C	-
5763850620	Plug EN 175301-803, form C	-
5763855270	Plug EN 175301-803, form C	-
5763855670	Plug EN 175301-803, form C	-
5763810220	Plug EN 175301-803, form C	-
5763810620	Plug EN 175301-803, form C	-
5763810920	Plug EN 175301-803, form C	Low power consumption
5763815220	Plug EN 175301-803, form C	-
5763815270	Plug EN 175301-803, form C	-
5763815670	Plug EN 175301-803, form C	-
5763815280	Plug EN 175301-803, form C	-
5763860220	Plug EN 175301-803, form C	-
5763860620	Plug EN 175301-803, form C	-
5763865270	Plug EN 175301-803, form C	-
5763865670	Plug EN 175301-803, form C	-
5763820210	Plug EN 175301-803, form C	-
5763820220	Plug EN 175301-803, form C	-
5763820620	Plug EN 175301-803, form C	-
5763825270	Plug EN 175301-803, form C	-
5763825670	Plug EN 175301-803, form C	-
5763825280	Plug EN 175301-803, form C	-
5763870220	Plug EN 175301-803, form C	-
5763870620	Plug EN 175301-803, form C	-
5763875270	Plug EN 175301-803, form C	-
5763875670	Plug EN 175301-803, form C	-

Nominal flow Q_n at 6 bar and $\Delta p = 1$ bar, MO = Manual override

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in the MediaCentre).

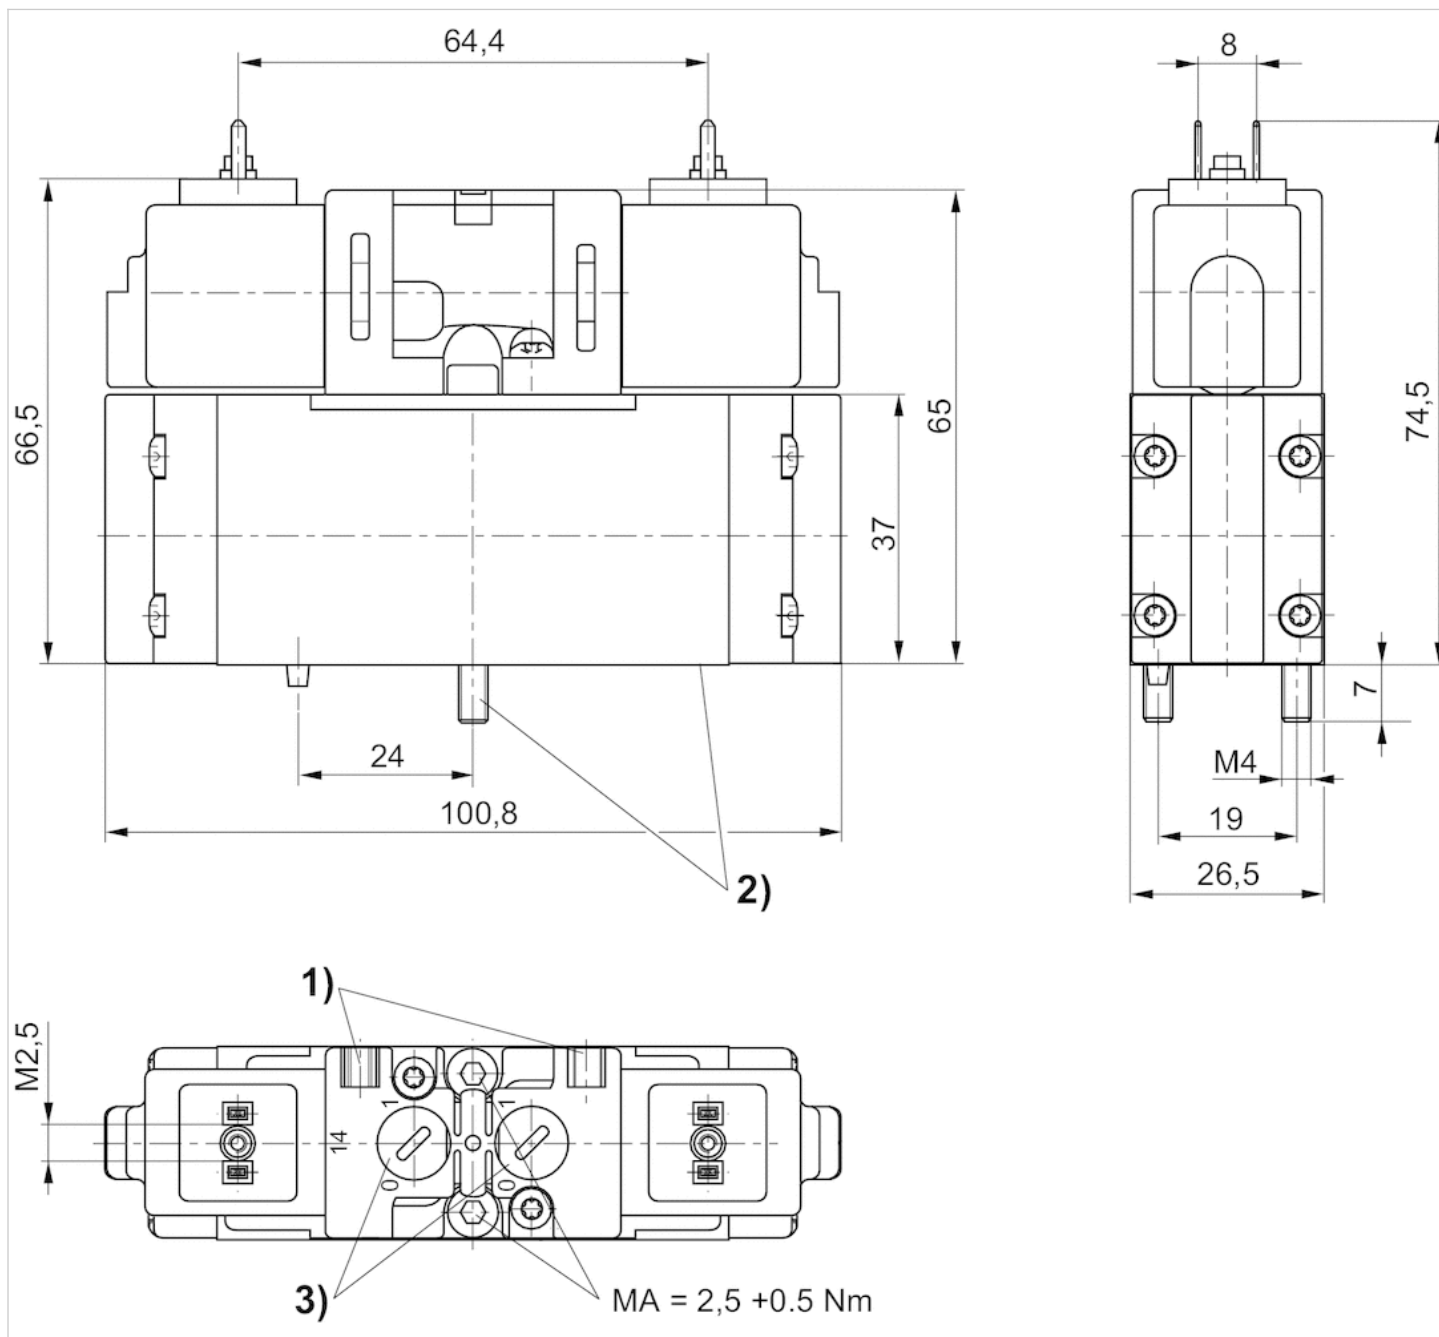
Versions with voltage of less than 50 V DC do not have a protective ground.

Technical information

Housing	Polyamide Polyoxymethylene
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions



1) mounting space for name plate 2) screws and seals captive 3) manual override

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2021 Emerson Electric Co. All rights reserved.
2021-04



CONSIDER IT SOLVED™