






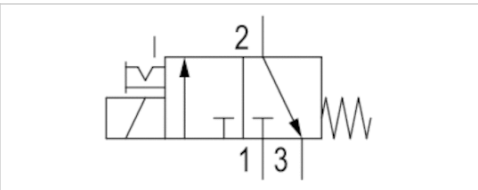

3/2-directional valve, Series 579

- NC
- Qn = 50 l/min
- Pipe connection
- Compressed air connection output Ø 6x1
- Electrical connection Plug, ISO 15217, form C
- Manual override with detent



Type	Poppet valve
Activation	Electrically
Sealing principle	Soft sealing
Working pressure min./max.	0 ... 7 bar
Ambient temperature min./max.	-15 ... 50 °C
Medium temperature min./max.	-15 ... 50 °C
Medium	Compressed air
Max. particle size	5 µm
Oil content of compressed air	0 ... 1 mg/m³
Nominal flow Qn	50 l/min
Protection class with connection	IP65
Reverse polarity protection	Protected against polarity reversal
Duty cycle	100 %
Typ. switch-on time	20 ms
Typ. switch-off time	23 ms
Weight	0,079 kg

Technical data

Part No.	MO		Type	Compressed air connection	
				Input	
5794000210		NC	single valve	Ø 6x1	
5794000220		NC	single valve	Ø 6x1	
5794000620		NC	single valve	Ø 6x1	
5794005220		NC	single valve	Ø 6x1	
5794005270		NC	single valve	Ø 6x1	
5794005280		NC	single valve	Ø 6x1	

Part No.	Compressed air connection	Operational voltage	Operational voltage
	Output		
5794000210	Ø 6x1	12 V	-
5794000220	Ø 6x1	24 V	-
5794000620	Ø 6x1	24 V	-
5794005220	Ø 6x1	-	24 V
5794005270	Ø 6x1	-	110 V
5794005280	Ø 6x1	-	230 V

Part No.	Operational voltage	Power consumption	Holding power	Holding power
		DC	AC 50 Hz	AC 60 Hz

Part No.	Operational voltage	Power consumption	Holding power	Holding power
	AC 60 Hz	DC	AC 50 Hz	AC 60 Hz
5794000210	-	2 W	-	-
5794000220	-	2 W	-	-
5794000620	-	2,1 W	-	-
5794005220	24 V	-	3,1 VA	3,1 VA
5794005270	110 V	-	3 VA	3 VA
5794005280	230 V	-	3,1 VA	3,1 VA

Part No.	Switch-on power	Switch-on power	LED	Protected against polarity reversal	
	AC 50 Hz	AC 60 Hz			
5794000210	-	-	-	Protected against polarity reversal	-
5794000220	-	-	-	Protected against polarity reversal	-
5794000620	-	-	Red	Protected against polarity reversal	1)
5794005220	4,2 VA	4,2 VA	-	Protected against polarity reversal	-
5794005270	4,2 VA	4,2 VA	-	Protected against polarity reversal	-
5794005280	4,4 VA	4,4 VA	-	Protected against polarity reversal	-

Nominal flow Q_n at 6 bar and $\Delta p = 1$ bar, MO = Manual override

1) with LED and protective diode for reducing voltage peaks in the solenoid coil

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).


Versions with voltage of less than 50 V DC do not have a protective ground.

Technical information

Material	
Housing	Polyamide
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

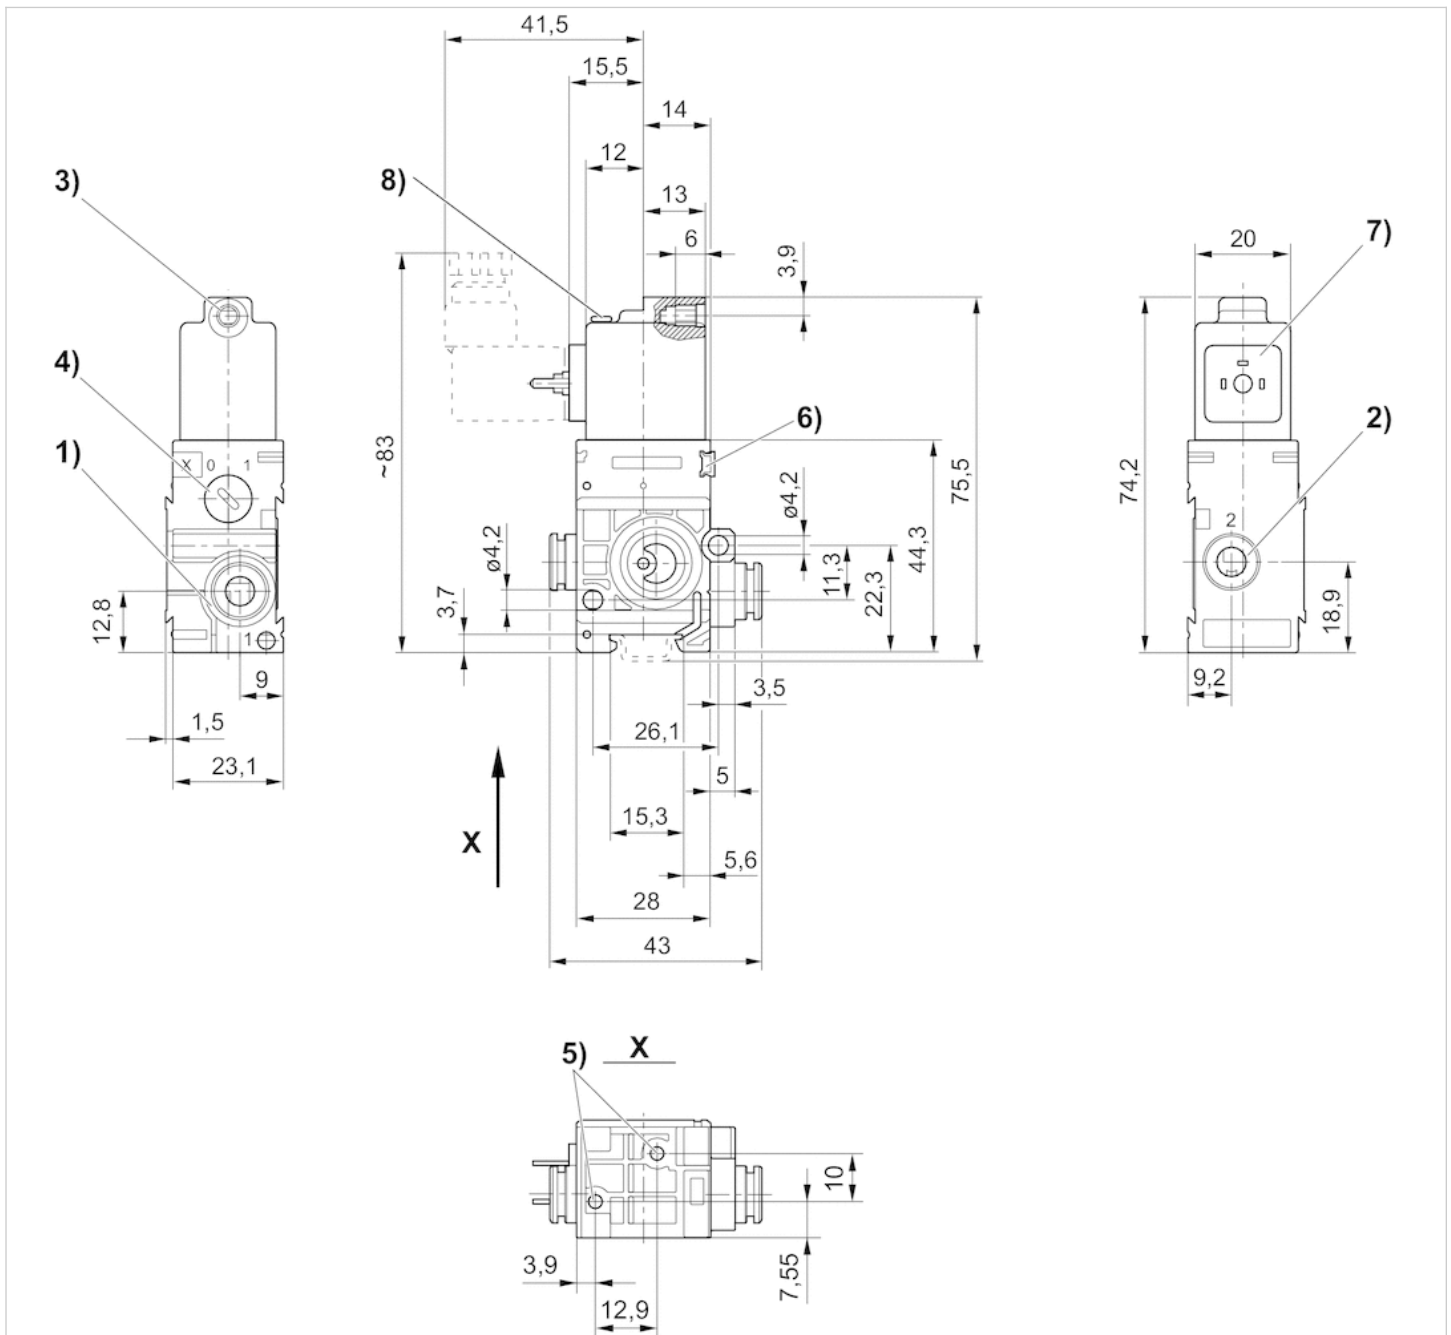

- 1) Port 1
- 2) Port 2
- 3) Port 3, core Ø for M5
- 4) Manual override
- 5) Pocket hole 6 mm deep for 3.5 self-tapping screw
- 6) Mounting space for name plate
- 7) Coil can be rotated at 180° intervals
- 8) LED

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™