


## valve cover, with or without pilot valve

- for 581
- size 1
- standard ISO 5599-1

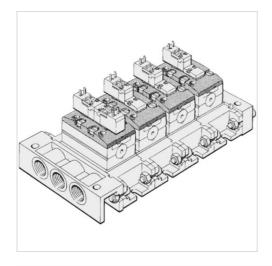


standard ISO 5599-1
Ambient temperature min./max. -20 ... 70 °C
Medium Compressed air
Max. particle size 50 µm
Oil content of compressed air 40 ... 400 mg/m³
Weight See table below

## Technical data

Part No.	Туре	Pilot valve width	Weight	
0493842501	5/2-directional valve, single solenoid	15 mm	0,057 kg	1)
0493842609	2x3/2-, 5/2-, 5/3-directional valve	15 mm	0,054 kg	2)
5811010000	5/2-directional valve, mono-stable	22 mm	0,13 kg	3)
5811020000	2x3/2-, 5/2-, 5/3-directional valve	22 mm	0,15 kg	4)
5811050000	5/2-directional valve, mono-stable	22 mm	0,13 kg	5)
5811060000	2x3/2-, 5/2-, 5/3-directional valve	22 mm	0,15 kg	5)
5811080000	all	30 mm	0,2 kg	1)

- 1) without pilot valve
- 2) without pilot valve, For version 12 V DC 230 V AC, 5 W
- 3) with pilot valve without coil, For version 12 V DC 230 V AC, 5 W  $\,$
- 4) with pilot valve without coil
- 5) with pilot valve without coil, For version 24 V DC, 2 W

## Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management

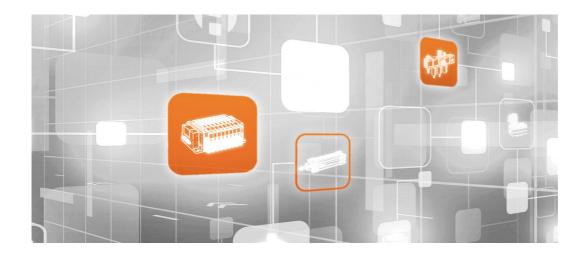

Visit us: Emerson.com/Aventics

Your local contact: Emerson.com/contactus



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR\_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and again.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. 

2020 Emerson Electric Co. All rights reserved.

