


valve cover, with or without pilot valve

- for 581
- size 2
- standard ISO 5599-1

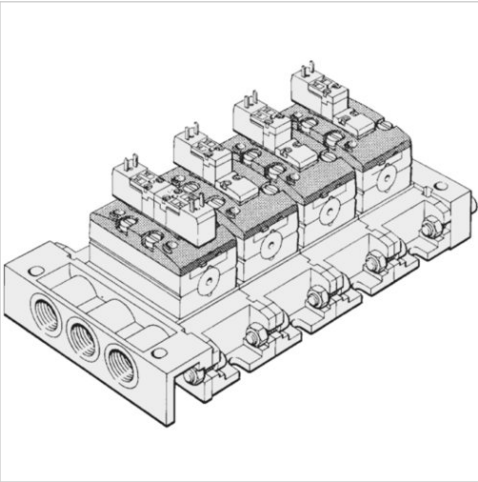

standard	ISO 5599-1
Ambient temperature min./max.	-10 ... 50 °C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air	40 ... 400 mg/m³
Weight	See table below

Technical data

Part No.	Type	Pilot valve width	Weight	
0493842706	5/2-directional valve, single solenoid	15 mm	0,085 kg	1)
0493842803	2x3/2-, 5/2-, 5/3-directional valve	15 mm	0,08 kg	2)
5812010000	5/2-directional valve, mono-stable	22 mm	1 kg	3)
5812020000	2x3/2-, 5/2-, 5/3-directional valve	22 mm	1 kg	4)
5812050000	5/2-directional valve, mono-stable	22 mm	0,17 kg	5)
5812060000	2x3/2-, 5/2-, 5/3-directional valve	22 mm	0,18 kg	5)
5812080000	all	30 mm	0,241 kg	-

- 1) without pilot valve
- 2) without pilot valve, For version 12 V DC - 230 V AC, 5 W
- 3) with pilot valve without coil, For version 12 V DC - 230 V AC, 5 W
- 4) with pilot valve without coil
- 5) with pilot valve without coil, For version 24 V DC, 2 W

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™