


Pressure gauge

- Back port
- Background color White
- Scale color Black, Red
- Units bar
- Units psi

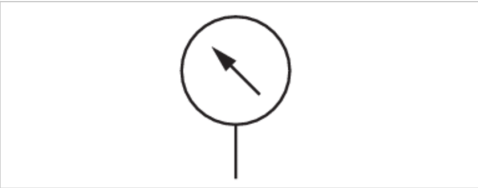

Ambient temperature min./max.	-15 ... 80 °C
Medium	Compressed air
Max. particle size	50 µm
Main scale unit (outside)	bar
Main scale color (outside)	Black
Secondary scale unit (inside)	psi
Secondary scale color (inside)	Red
Background color	White
Pointer color	Black
Weight	See table below
The delivered product may vary from that in the illustration.	

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
R412003960	Ø 6	28 mm	0 ... 4	0 bar ... 4	0 ... 4 bar	-
3530200300	Ø 6	28 mm	0 ... 10	0 bar ... 10 bar	0 ... 10 bar	-
R412004883	Ø 6	28 mm	0 ... 10	0 bar ... 10 bar	0 ... 10 bar	1

Part No.	Weight
R412003960	0,016 kg
3530200300	0,016 kg
R412004883	0,02 kg


Included in the delivery contents: Straight push-in fitting, increasing (1823391628)

Technical information

Material	
Housing	Polyamide

Dimensions

Dimensions in mm

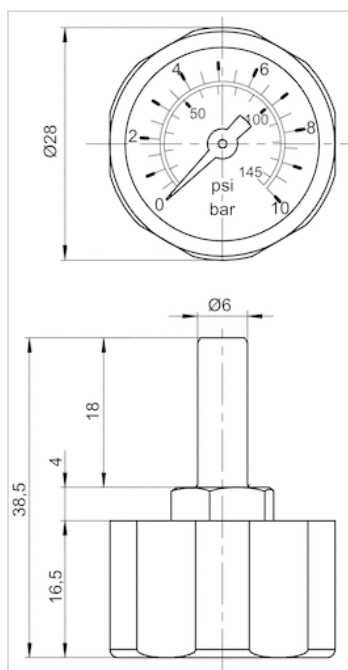


Pressure gauge, Series PG1-DIM

- for differential pressure measurement for prefilters and microfilters
- flange version
- Background color White
- Scale color Black
- Viewing window Polystyrene
- Units bar
- suitable for ATEX



Version	Diaphragm pressure gauge
Mounting orientation	vertical
Ambient temperature min./max.	0 ... 60 °C
Medium	Compressed air
Color for differential pressure range	Green, Red
Main scale unit (outside)	bar
Main scale color (outside)	Black
Background color	White
Pointer color	Black
Weight	0,127 kg

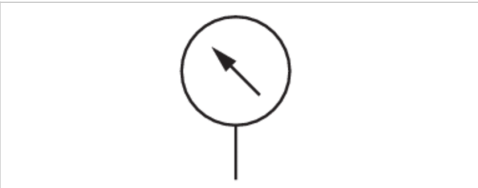

Technical data

Part No.	Range of application	Display range	Operating pressure	Scale value
1827231072	0 ... 0,5 bar	0 ... 0,5 bar	0 ... 16 bar	0,1

Suitable for use in Ex zones 1, 2, 21, 22

Technical information


Suitable for use in Ex zones 1, 2, 21, 22

Technical information

Material	
Housing	Polyamide, fiber-glass reinforced
Viewing window	Polystyrene
Seal	Acrylonitrile butadiene styrene

Dimensions

Dimensions

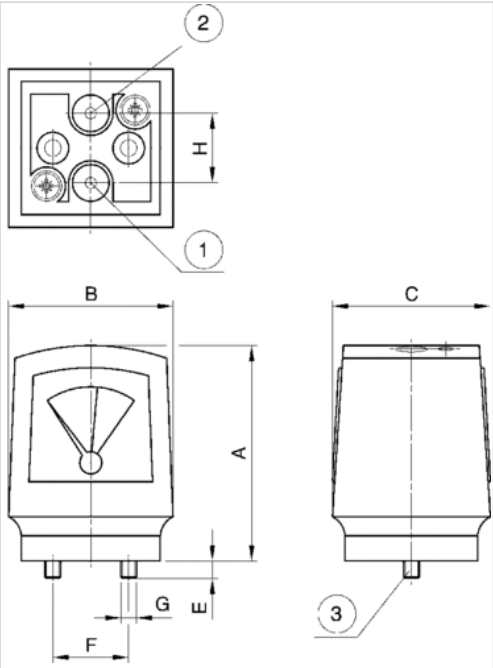


- 1) Input pressure p1 2) Output pressure p2
- 3) Mounting screw and 2 O-rings included in scope of delivery

Dimensions in mm

A	B	C	E	F	G	H
68	52	50	6	24	M5	22

Pressure gauge, Series PG1-GLY

- Back port
- with glycerin filling
- Background color White
- Scale color Black, Black
- Viewing window Polystyrene
- Units bar
- Units psi

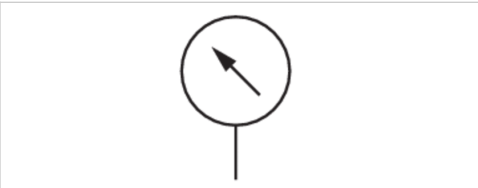

Version	Bourdon tube pressure gauge
Version	with glycerin filling
Seal	Axial
Standardization	EN 837-1
Class	1,6
Ambient temperature min./max.	-25 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	Black
Secondary scale unit (inside)	psi
Secondary scale color (inside)	Black
Background color	White
Pointer color	Black
Weight	0,26 kg

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value	
R412010126	R 1/8	63 mm	0 ... 3	0 ... 4	0 ... 4 bar	0,2	-
R412010127	R 1/8	63 mm	0 ... 4	0 ... 6	0 ... 6 bar	0,2	-
R412010128	R 1/8	63 mm	0 ... 8	0 ... 10	0 ... 10 bar	0,5	-
R412010129	R 1/8	63 mm	0 ... 12	0 ... 16	0 ... 16 bar	0,5	-
R412010130	R 1/8	63 mm	0 ... 12	0 ... 16	0 ... 16 bar	0,5	1)
R412010131	G 1/4	63 mm	0 ... 3	0 ... 4	0 ... 4 bar	0,2	-
R412010132	G 1/4	63 mm	0 ... 4	0 ... 6	0 ... 6 bar	0,2	-
R412010133	G 1/4	63 mm	0 ... 8	0 ... 10	0 ... 10 bar	0,5	-
R412010134	G 1/4	63 mm	0 ... 12	0 ... 16	0 ... 16 bar	0,5	-

Order retainer ring 3530132602 for control panel installation separately.

1) Red marking at 5 bar

Technical information


Order axial seal separately

Technical information

Material	
Housing	Stainless steel
Thread	Brass
Viewing window	Polystyrene

Dimensions

Dimensions in mm

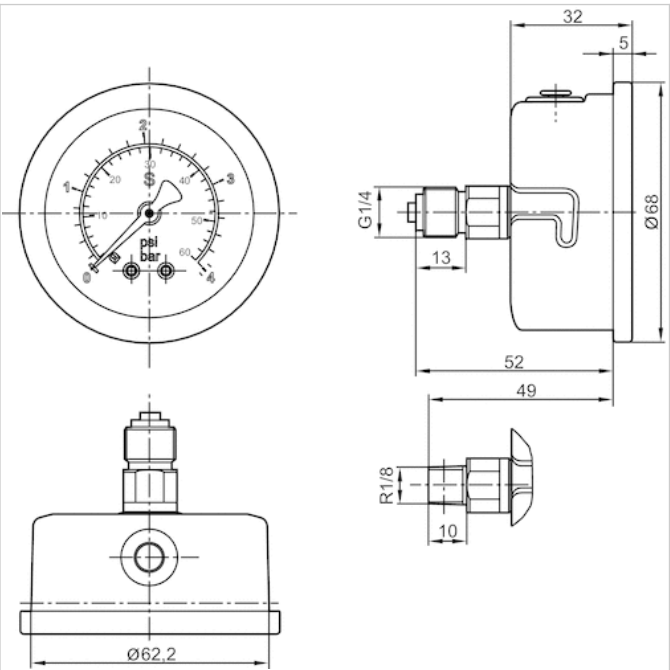


Order retainer ring 3530132602 for control panel installation separately.

Pressure gauge, Series PG1-INT

- flange version
- Background color White
- Scale color Black
- Viewing window Polycarbonate
- Units bar



Version	Diaphragm pressure gauge
Ambient temperature min./max.	0 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	Black
Background color	White
Pointer color	Black
Weight	0,024 kg

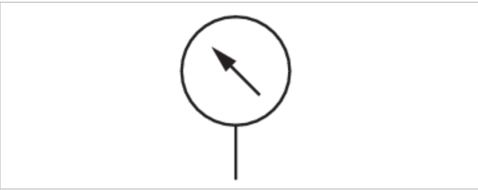

Technical data


Part No.	Range of application	Display range	Operating pressure	Scale value
R412014760	0 ... 6	0 ... 6	0 ... 6 bar	0,25
R412014761	0 ... 12	0 ... 12	0 ... 12 bar	0,25

Technical information

Material	
Housing	Polyamide
Viewing window	Polycarbonate
Seal	Nitrile butadiene rubber

Dimensions

Dimensions

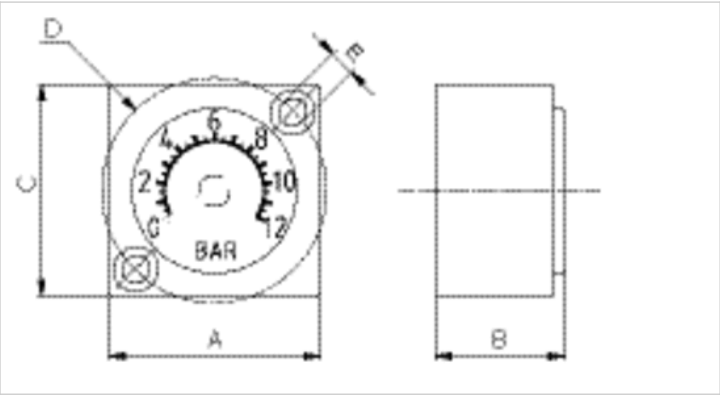

Dimensions in mm


Part No.	A	B	C	D	E
R412014760	27	16.5	27	28.3	3.3
R412014761	27	16.5	27	28.3	3.3

Pressure gauge, Series PG1-LIG

- with light
- Back port
- tropicalized, corrosion-protected
- Background color White
- Scale color Black, Black
- Viewing window glass
- Units bar
- Units psi



Version	Bourdon tube pressure gauge
Mounting	with U-clip
Class	1
Ambient temperature min./max.	25 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	Black
Secondary scale unit (inside)	psi
Secondary scale color (inside)	Black
Background color	White
Pointer color	Black, Red

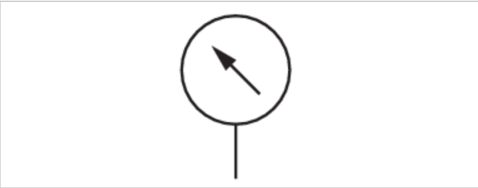

Technical data


Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
3530040020	Ø6x1	60 mm	0 ... 8	0 ... 10	0 ... 10 bar	0,5

Technical information

Material	
Housing	Steel, chrome-plated
Thread	Brass
Front ring	Steel, chrome-plated
Viewing window	glass

Dimensions

Dimensions

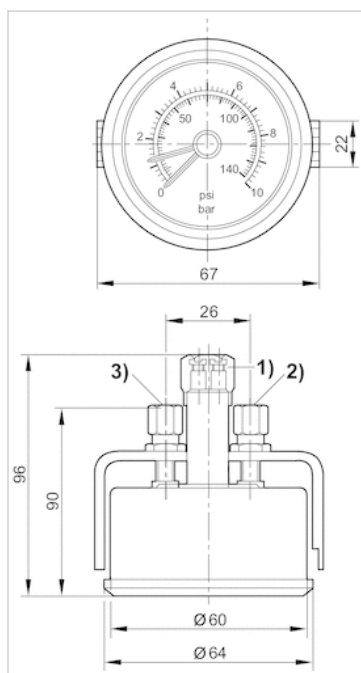


- 1) 2-pin lamp terminal 24 V/1.2 W
- 2) pipe connection for red pointer (bottom)
- 3) pipe connection for black pointer (top)

Pressure gauge, Series PG1-SAS

- Back port
- Background color Black
- Scale color White, Grey
- Viewing window Polystyrene
- Units bar
- Units psi



Version	Bourdon tube pressure gauge
Standardization	EN 837-1
Class	2,5
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	White
Secondary scale unit (inside)	psi
Secondary scale color (inside)	Grey
Background color	Black
Pointer color	White
Weight	See table below

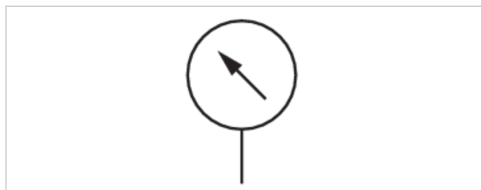

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
R412003853	G 1/8	40 mm	0 ... 1,2 bar	0 ... 1,6 bar	0 ... 1,6 bar	0,05
R412003854	G 1/8	40 mm	0 ... 2 bar	0 ... 2,5 bar	0 ... 2,5 bar	0,1
R412003855	G 1/8	40 mm	0 ... 3,2 bar	0 ... 4 bar	0 ... 4 bar	0,1
R412003856	G 1/8	40 mm	0 ... 4 bar	0 ... 6 bar	0 ... 6 bar	0,2
R412003857	G 1/8	40 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,2
R412003858	G 1/8	40 mm	0 ... 12 bar	0 ... 16 bar	0 ... 16 bar	0,5
R412004407	G 1/4	40 mm	0 ... 1,2 bar	0 ... 1,6 bar	0 ... 1,6 bar	0,05
R412004408	G 1/4	40 mm	0 ... 2 bar	0 ... 2,5 bar	0 ... 2,5 bar	0,1
R412004409	G 1/4	40 mm	0 ... 3,2 bar	0 ... 4 bar	0 ... 4 bar	0,1
R412004410	G 1/4	40 mm	0 ... 4 bar	0 ... 6 bar	0 ... 6 bar	0,2
R412004411	G 1/4	40 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,2
R412004412	G 1/4	40 mm	0 ... 12 bar	0 ... 16 bar	0 ... 16 bar	0,5
R412004413	G 1/4	50 mm	0 ... 1,2 bar	0 ... 1,6 bar	0 ... 1,6 bar	0,05
R412004414	G 1/4	50 mm	0 ... 2 bar	0 ... 2,5 bar	0 ... 2,5 bar	0,1
R412004415	G 1/4	50 mm	0 ... 3,2 bar	0 ... 4 bar	0 ... 4 bar	0,1
R412004416	G 1/4	50 mm	0 ... 4 bar	0 ... 6 bar	0 ... 6 bar	0,2
R412004417	G 1/4	50 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,2
R412004418	G 1/4	50 mm	0 ... 12 bar	0 ... 16 bar	0 ... 16 bar	0,5
R412007898	G 1/4	50 mm	0 ... 20 bar	0 ... 25 bar	0 ... 25 bar	1

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
R412004419	G 1/4	63 mm	0 ... 1,2 bar	0 ... 1,6 bar	0 ... 1,6 bar	0,05
R412004420	G 1/4	63 mm	0 ... 2 bar	0 ... 2,5 bar	0 ... 2,5 bar	0,1
R412004421	G 1/4	63 mm	0 ... 3,2 bar	0 ... 4 bar	0 ... 4 bar	0,1
R412004422	G 1/4	63 mm	0 ... 4 bar	0 ... 6 bar	0 ... 6 bar	0,2
R412004423	G 1/4	63 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,2
R412004424	G 1/4	63 mm	0 ... 12 bar	0 ... 16 bar	0 ... 16 bar	0,5

Part No.	Weight	
R412003853	0,08 kg	-
R412003854	0,08 kg	-
R412003855	0,08 kg	-
R412003856	0,08 kg	-
R412003857	0,08 kg	-
R412003858	0,08 kg	-
R412004407	0,08 kg	-
R412004408	0,08 kg	-
R412004409	0,08 kg	-
R412004410	0,08 kg	-
R412004411	0,08 kg	-
R412004412	0,08 kg	-
R412004413	0,09 kg	-
R412004414	0,09 kg	-
R412004415	0,09 kg	-
R412004416	0,09 kg	-
R412004417	0,09 kg	1)
R412004418	0,09 kg	1)
R412007898	0,09 kg	-
R412004419	0,1 kg	-
R412004420	0,1 kg	-
R412004421	0,1 kg	-
R412004422	0,1 kg	-
R412004423	0,1 kg	-
R412004424	0,1 kg	-


1) Suitable for use in Ex zones 1, 2, 21, 22

Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass
Viewing window	Polystyrene
Seal	Polytetrafluorethylene

Dimensions

Dimensions

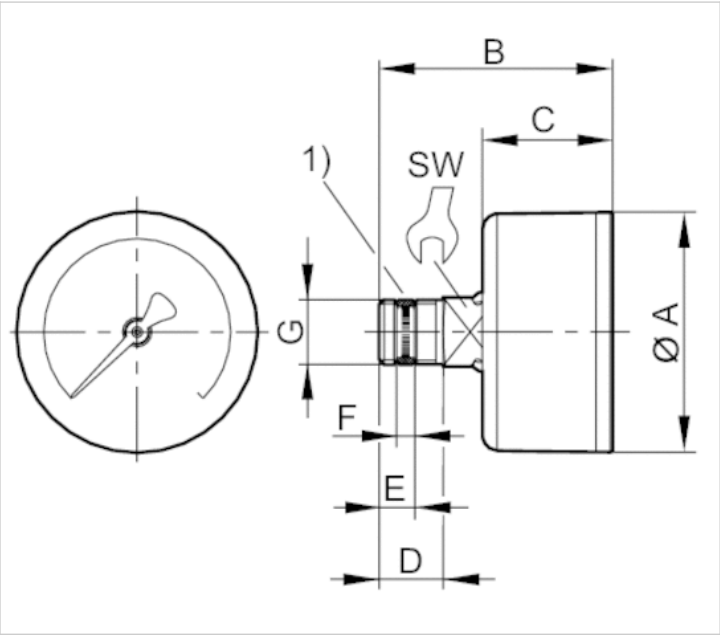


1) Gasket thread

Dimensions in mm

Compressed air connection	Nominal diameter	Ø A	B	C	D	E	F 1)	SW
G 1/8	40 mm	39	44.5	26.5	10	5.6	2.1	14
G 1/4	40 mm	39	47.5	26.5	13	7.2	3.7	14
G 1/4	50 mm	49	47.5	26.5	13	7.2	3.7	14
G 1/4	63 mm	62	47	29	13	7.2	3.7	14

Pressure gauge, Series PG1-SAS-ADJ

- Back port
- with adjustable work area display
- Background color Black
- Scale color White, Grey
- Viewing window Polystyrene
- Units bar
- Units psi

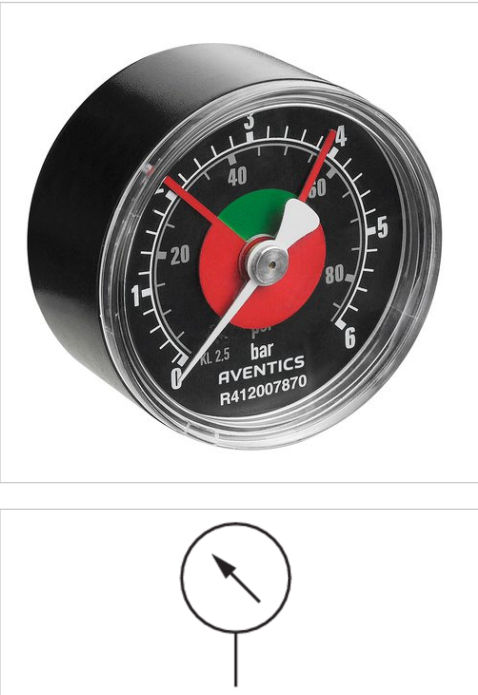

Version	Bourdon tube pressure gauge
Version	with adjustable work area display
Standardization	EN 837-1
Class	2,5
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Work area	adjustable work area display
Work Area Display, Color	Red, Green
Main scale unit (outside)	bar
Main scale color (outside)	White
Secondary scale unit (inside)	psi
Secondary scale color (inside)	Grey
Background color	Black
Pointer color	White
Weight	0,1 kg

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
R412007867	G 1/4	50 mm	0 bar ... 1,2	0 bar ... 1,6	0 ... 1,6 bar	0,05
R412007868	G 1/4	50 mm	0 bar ... 2	0 bar ... 2,5	0 ... 2,5 bar	0,1
R412007869	G 1/4	50 mm	0 bar ... 3,2	0 bar ... 4	0 ... 4 bar	0,1
R412007870	G 1/4	50 mm	0 bar ... 4	0 bar ... 6	0 ... 6 bar	0,2
R412007871	G 1/4	50 mm	0 bar ... 8	0 bar ... 10	0 ... 10 bar	0,2
R412007872	G 1/4	50 mm	0 bar ... 12	0 bar ... 16	0 ... 16 bar	0,5

Technical information

To set the operating range, the cover (inspection glass) must be removed. To do this, carefully lift the inspection glass by inserting a pointed or flat object in the slot provided for this purpose on the housing circumference.


Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass

Material	
Viewing window	Polystyrene
Seal	Polytetrafluorethylene

Dimensions

Dimensions

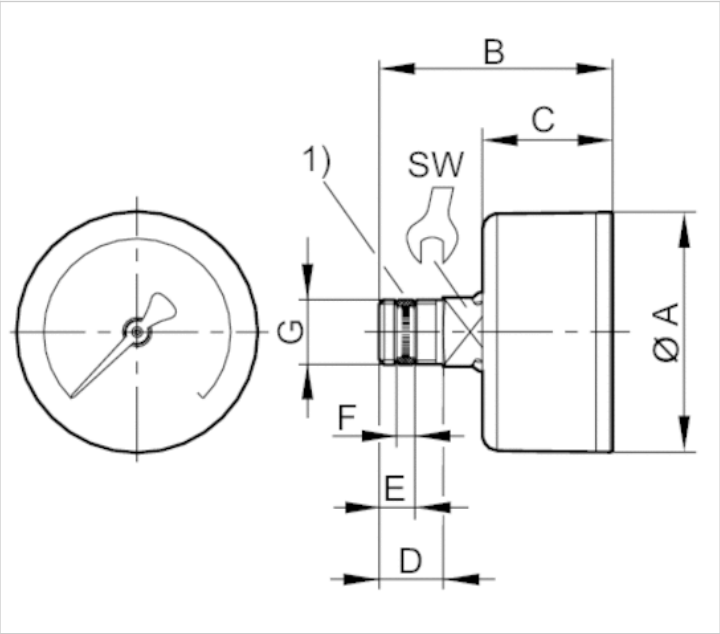

1) Gasket thread

Dimensions in mm


Compressed air connection	Nominal diameter	Ø A	B	C	D	E	F	SW
G 1/4	50 mm	49	47.5	26.5	13	7.2	3.7	14

Pressure gauge, Series PG1-SFB

- Back port
- Background color White
- Scale color Black
- Viewing window Safety glass
- Units psi



Version	Bourdon tube pressure gauge
Class	2
Ambient temperature min./max.	-40 ... 120 °C
Medium	Compressed air
Main scale unit (outside)	psi
Main scale color (outside)	Black
Background color	White
Pointer color	Black
Weight	0,08 kg

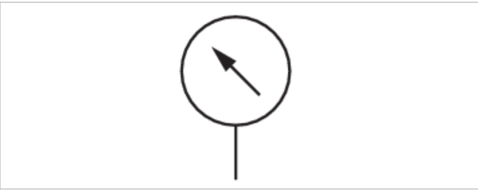


Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
R432035768	1/8 NPT	40 mm	0 ... 130 psi	0 ... 200 psi	0 ... 13,79 bar	5

Technical information


Material	
Housing	Stainless steel
Thread	Stainless steel
Viewing window	Safety glass
pointer	Stainless steel

Dimensions Fig. 2

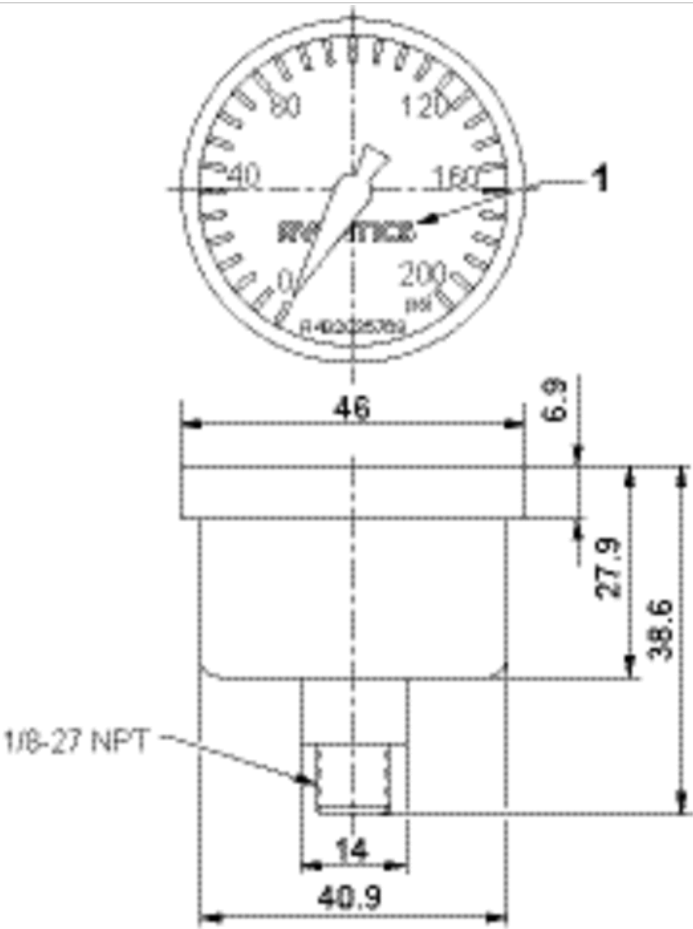


Dimensions

Dimensions Fig. 1

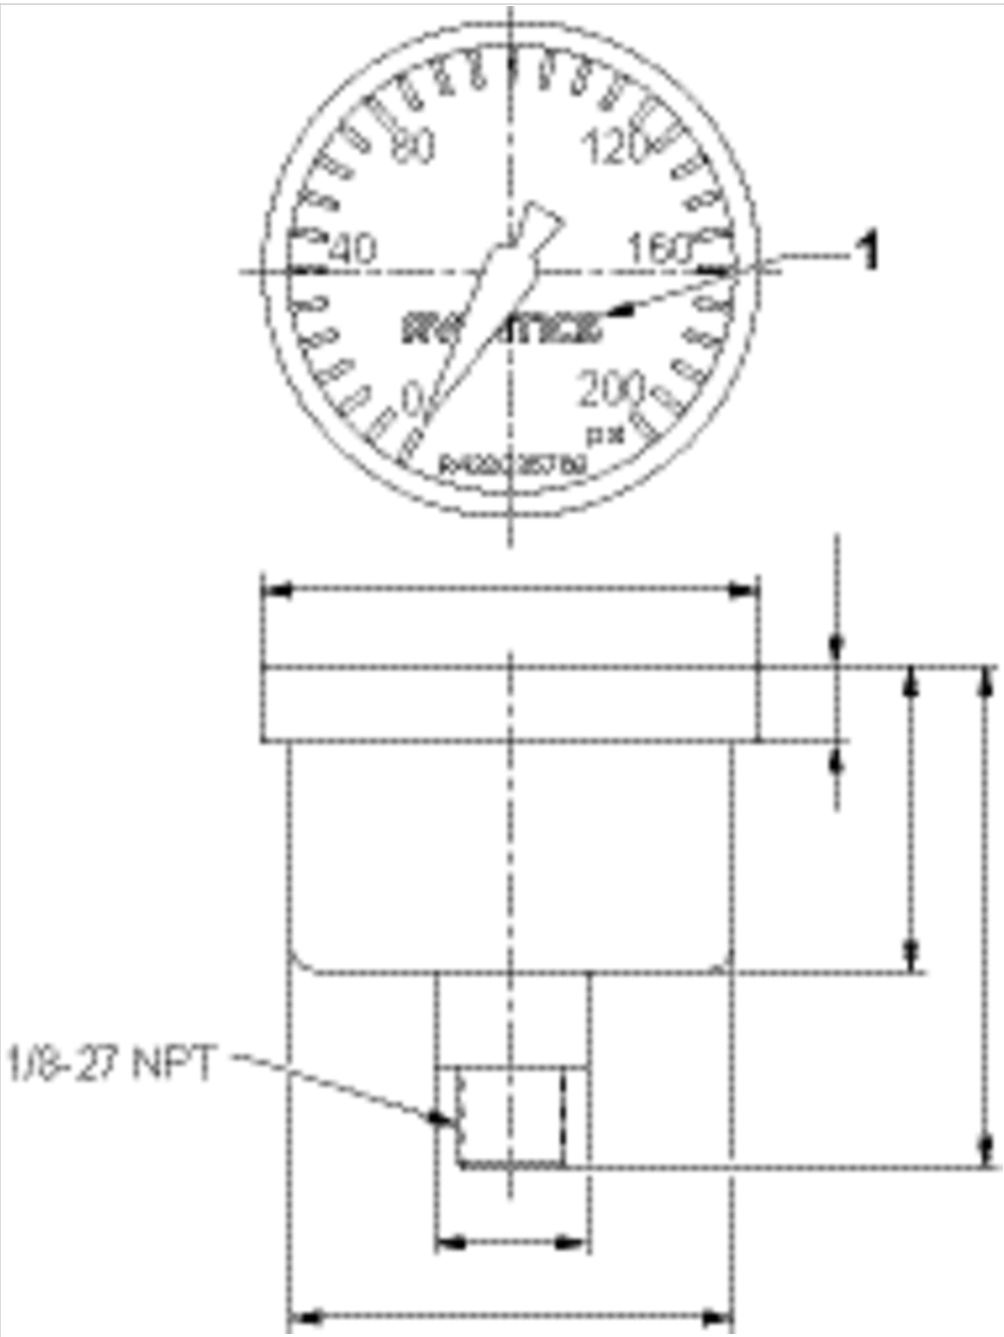

Pressure gauge, Series PG1-SFB

- Back port
- Background color White
- Scale color Black, Grey
- Units bar
- Units psi

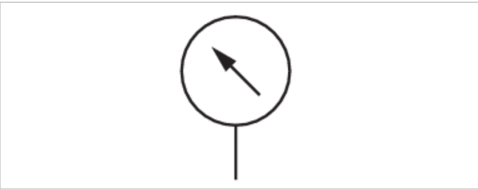

Version	Bourdon tube pressure gauge
Standardization	EN 837-1
Class	2,5
Ambient temperature min./max.	-25 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	Black
Secondary scale unit (inside)	psi
Secondary scale color (inside)	Grey
Background color	White
Pointer color	Black
Weight	0,091 kg

Technical data


Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value	
R412010678	R 1/8	50 mm	0 ... 10	0 ... 12	0 ... 12 bar	0,2	1)
R412010679	R 1/8	50 mm	0 ... 10	0 ... 12	0 ... 12 bar	0,2	2)

- 1) Polycarbonate viewing window
- 2) Safety glass viewing window

Technical information


Material	
Housing	Stainless steel
Thread	Stainless steel
pointer	Stainless steel

Dimensions Fig. 2 Safety glass viewing window

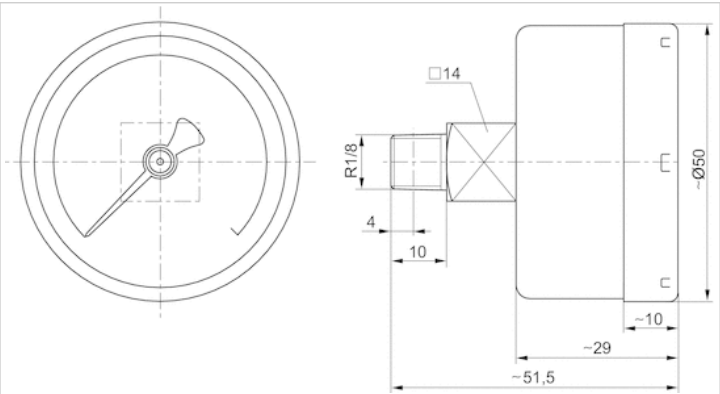


Dimensions

Dimensions Fig. 1 Polycarbonate viewing window

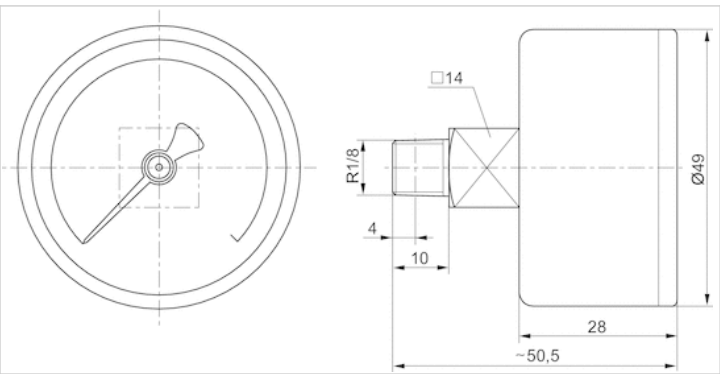

Pressure gauge, Series PG1-SNL

- Back port
- Background color Black
- Scale color Green, White
- Viewing window Polystyrene
- Units bar
- Units psi

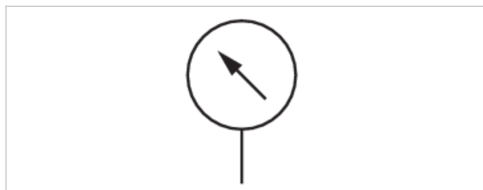

Version	Bourdon tube pressure gauge
Seal	Axial
Standardization	EN 837-1
Class	1,6
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	Green
Secondary scale unit (inside)	psi
Secondary scale color (inside)	White
Background color	Black
Pointer color	White
Weight	See table below

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
1827231053	G 1/8	40 mm	-0,8 ... 0 bar	-1 ... 0 bar	-1 ... 0 bar	0,1
1827231048	G 1/8	40 mm	0 ... 1,7 bar	0 ... 2,5 bar	0 ... 2,5 bar	0,1
1827231024	G 1/8	40 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,5
1827231009	G 1/8	40 mm	0 ... 12 bar	0 ... 16 bar	0 ... 16 bar	0,5
1827231057	G 1/4	40 mm	-0,8 ... 0 bar	-1 ... 0 bar	-1 ... 0 bar	0,1
1827231047	G 1/4	40 mm	0 ... 10 bar	0 ... 16 bar	0 ... 16 bar	0,5
1827231059	G 1/4	40 mm	0 ... 4 bar	0 ... 6 bar	0 ... 6 bar	0,2
1827231060	G 1/4	40 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,5
1827231054	G 1/4	50 mm	-0,8 ... 0 bar	-1 ... 0 bar	-1 ... 0 bar	0,1
1827231012	G 1/4	50 mm	0 ... 2 bar	0 ... 2,5 bar	0 ... 2,5 bar	0,1
1827231016	G 1/4	50 mm	0 ... 4 bar	0 ... 6 bar	0 ... 6 bar	0,2
1827231015	G 1/4	50 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,5
1827231010	G 1/4	50 mm	0 ... 12 bar	0 ... 16 bar	0 ... 16 bar	0,5
1827231055	G 1/4	63 mm	-0,8 ... 0 bar	-1 ... 0 bar	-1 ... 0 bar	0,1
1827231011	G 1/4	63 mm	0 ... 12 bar	0 ... 16 bar	0 ... 16 bar	0,5

Part No.	Weight	
1827231053	0,06 kg	-

Part No.	Weight	
1827231048	0,06 kg	-
1827231024	0,06 kg	1)
1827231009	0,06 kg	1)
1827231057	0,06 kg	-
1827231047	0,06 kg	1)
1827231059	0,06 kg	-
1827231060	0,06 kg	1)
1827231054	0,09 kg	-
1827231012	0,09 kg	-
1827231016	0,09 kg	1)
1827231015	0,09 kg	1)
1827231010	0,09 kg	1)
1827231055	0,1 kg	-
1827231011	0,1 kg	1)

Order seal 1829202004 separately

1) Suitable for use in Ex zones 1, 2, 21, 22

Technical information


Order axial seal separately

Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass
Viewing window	Polystyrene

Dimensions

Dimensions

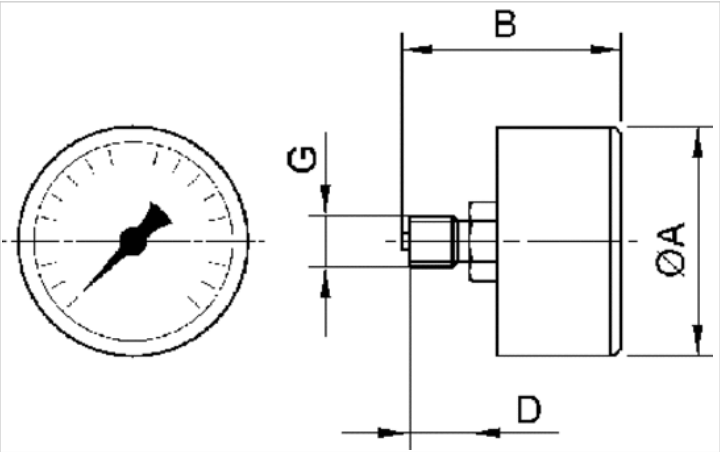


Dimensions in mm

G	Nominal diameter	Ø A	B	D
G 1/8	40 mm	39	44	10
G 1/4	40 mm	41	41.5	10
G 1/4	50 mm	49	47.5	13
G 1/4	63 mm	63	48.3	13

Pressure gauge, Series PG1-SNL

- For panel installation
- Background color Black
- Scale color Green, White
- Viewing window Polystyrene
- Units bar
- Units psi

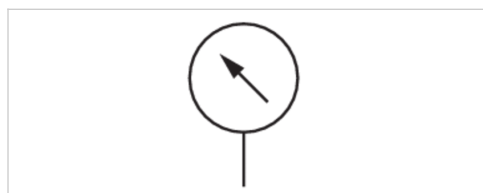

Version	Bourdon tube pressure gauge
Mounting	with U-clip
Seal	Axial
Standardization	EN 837-1
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	Green
Secondary scale unit (inside)	psi
Secondary scale color (inside)	White
Background color	Black
Pointer color	White
Weight	See table below

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value	Class
1827231040	G 1/8	40 mm	-0,8 ... 0	0 ... 1	-1 ... 0 bar	0,1	1,6
1827231042	G 1/8	40 mm	0 ... 2	0 ... 2,5	0 ... 2,5 bar	0,1	1,6
1827231041	G 1/8	40 mm	0 ... 4	0 ... 6	0 ... 6 bar	0,2	1,6
1827231030	G 1/8	40 mm	0 ... 8	0 ... 10	0 ... 10 bar	0,5	1,6
1827231031	G 1/8	40 mm	0 ... 12	0 ... 16	0 ... 16 bar	0,5	2,5
1827231032	G 1/4	50 mm	0 ... 2	0 ... 2,5	0 ... 2,5 bar	0,1	1,6
1827231036	G 1/4	63 mm	0 ... 2	0 ... 2,5	0 ... 2,5 bar	0,1	1,6
1827231033	G 1/4	50 mm	0 ... 4	0 ... 6	0 ... 6 bar	0,2	1,6
1827231037	G 1/4	63 mm	0 ... 4	0 ... 6	0 ... 6 bar	0,2	1,6
1827231034	G 1/4	50 mm	0 ... 8	0 ... 10	0 ... 10 bar	0,5	1,6
1827231038	G 1/4	63 mm	0 ... 8	0 ... 10	0 ... 10 bar	0,5	1,6
1827231035	G 1/4	50 mm	0 ... 12	0 ... 16	0 ... 16 bar	0,5	1,6
1827231039	G 1/4	63 mm	0 ... 12	0 ... 16	0 ... 16 bar	0,5	1,6

Part No.	Weight	
1827231040	0,097 kg	1)
1827231042	0,097 kg	-
1827231041	0,097 kg	-

Part No.	Weight	
1827231030	0,097 kg	-
1827231031	0,097 kg	-
1827231032	0,148 kg	-
1827231036	0,19 kg	-
1827231033	0,148 kg	-
1827231037	0,19 kg	-
1827231034	0,148 kg	-
1827231038	0,19 kg	-
1827231035	0,148 kg	-
1827231039	0,19 kg	-

1) Vacuum

Technical information

To set the operating range, the cover (inspection glass) must be removed. To do this, carefully lift the inspection glass by inserting a pointed or flat object in the slot provided for this purpose on the housing circumference.


Order axial seal separately

Technical information

Material	
Housing	Steel
Thread	Brass
Front ring	Steel, chrome-plated
Viewing window	Polystyrene

Dimensions

Dimensions

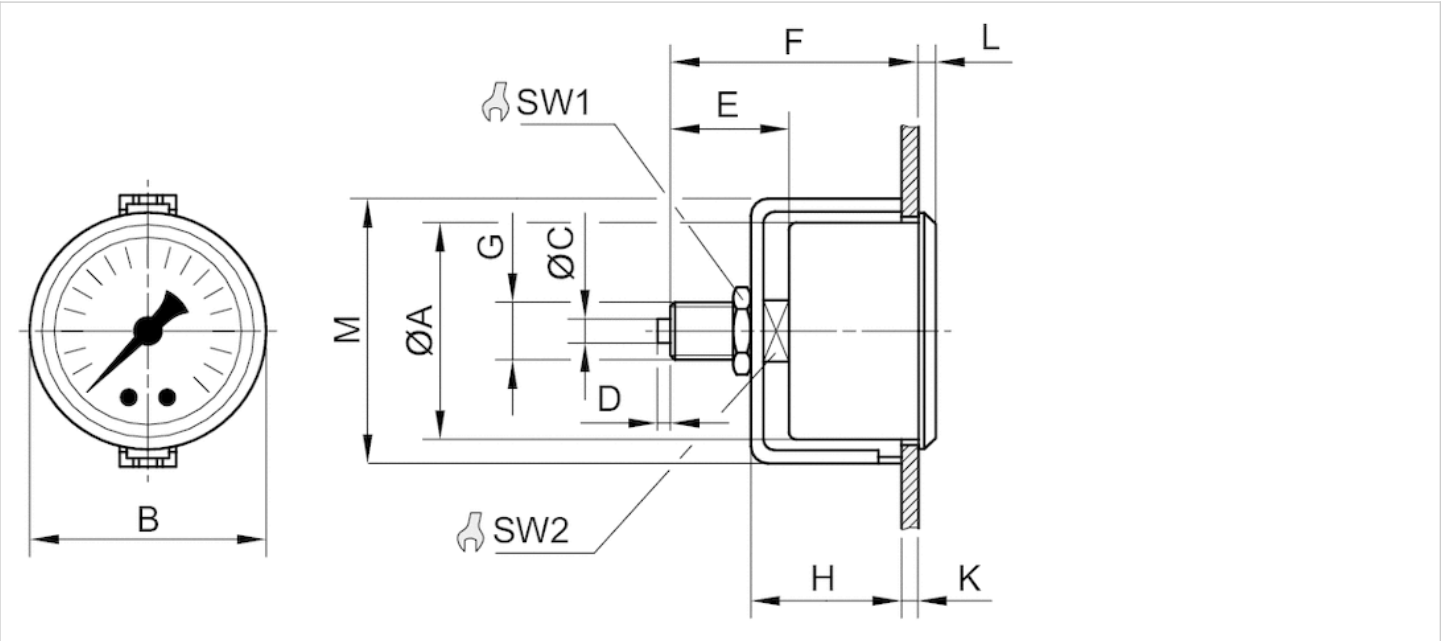


Dimensions in mm

Compressed air connection	Nominal diameter	Ø A	B	C	D	E	F	H	K	L	M	SW1
G 1/8	40 mm	40	43	–	–	25.5	49	32	4	4	49	17
G 1/4	50 mm	50	54	5	3	29.5	51.5	34.5	3	4.5	61	17
G 1/4	63 mm	62	67	5	3	27	53	36.3	4.2	5.5	75	17
G 1/4	50 mm	50	54	5	3	29.5	51.5	34.5	3	4.5	61	17
G 1/4	63 mm	62	67	5	3	27	53	36.3	4.2	5.5	75	17
G 1/4	50 mm	50	54	5	3	29.5	51.5	34.5	3	4.5	61	17
G 1/4	63 mm	62	67	5	3	27	53	36.3	4.2	5.5	75	17
G 1/4	50 mm	50	54	5	3	29.5	51.5	34.5	3	4.5	61	17
G 1/4	63 mm	62	67	5	3	27	53	36.3	4.2	5.5	75	17

SW2
14
14
14
14
14
14
14
14
14

Pressure gauge, Series PG1-SNL

- Back port
- Background color Black
- Scale color Green, White
- Viewing window Mineral glass
- Units bar
- Units psi

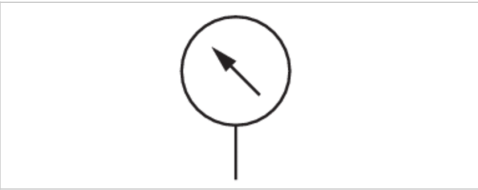

Version	Bourdon tube pressure gauge
Seal	Axial
Standardization	EN 837-1
Class	1,6
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	Green
Secondary scale unit (inside)	psi
Secondary scale color (inside)	White
Background color	Black
Pointer color	White
Weight	0,09 kg

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
R412004987	G 1/4	50 mm	0 ... 12 bar	0 ... 16 bar	0 ... 16 bar	0,5

Technical information

Suitable for use in Ex zones 1, 2, 21, 22


Order axial seal separately

Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass
Viewing window	Mineral glass

Dimensions

Dimensions

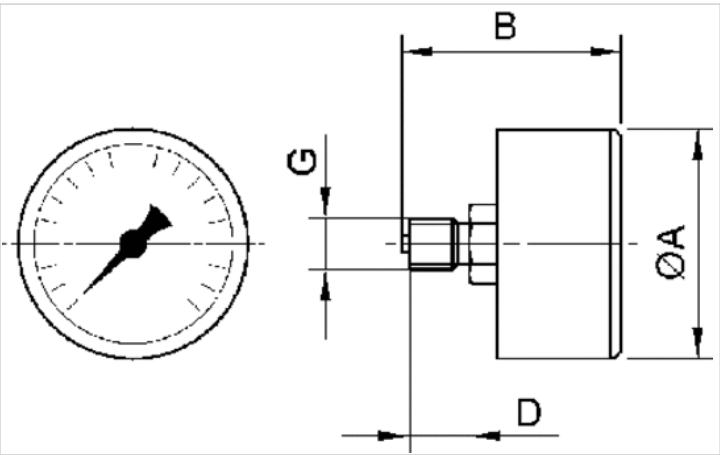


Dimensions in mm

G	Nominal diameter	Ø A	B	D
G 1/4	50 mm	49	47.5	13

Pressure gauge, Series PG1-SNL-ADJ

- Back port
- with adjustable work area display
- Background color White
- Scale color Black
- Viewing window Polystyrene
- Units bar

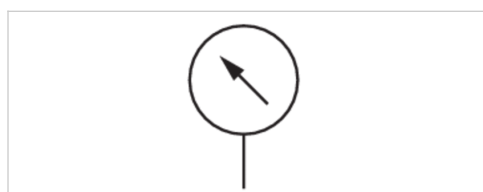

Version	Bourdon tube pressure gauge
Version	with adjustable work area display
Seal	Axial
Standardization	EN 837-1
Class	2,5
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Work area	adjustable work area display
Work Area Display, Color	Red, Green
Main scale unit (outside)	bar
Main scale color (outside)	Black
Background color	White
Pointer color	Black
Weight	0,09 kg

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
1827231075	G 1/8	50 mm	0 bar ... 1,2	0 bar ... 1,6	0 ... 1,6 bar	0,05
1827231076	G 1/8	50 mm	0 bar ... 2	0 bar ... 2,5	0 ... 2,5 bar	0,1
1827231077	G 1/8	50 mm	0 bar ... 3,2	0 bar ... 4	0 ... 4 bar	0,2
1827231078	G 1/8	50 mm	0 bar ... 4	0 bar ... 6	0 ... 6 bar	0,2
1827231079	G 1/8	50 mm	0 bar ... 8	0 bar ... 10	0 ... 10 bar	0,5
1827231080	G 1/8	50 mm	0 bar ... 12	0 bar ... 16	0 ... 16 bar	0,5
R412003474	G 1/4	50 mm	0 bar ... 1,2	0 bar ... 1,6	0 ... 1,6 bar	0,05
R412003475	G 1/4	50 mm	0 bar ... 2	0 bar ... 2,5	0 ... 2,5 bar	0,1
R412003476	G 1/4	50 mm	0 bar ... 3,2	0 bar ... 4	0 ... 4 bar	0,2
R412003477	G 1/4	50 mm	0 bar ... 4	0 bar ... 6	0 ... 6 bar	0,2
R412003478	G 1/4	50 mm	0 bar ... 8	0 bar ... 10	0 ... 10 bar	0,5
R412003479	G 1/4	50 mm	0 bar ... 12	0 bar ... 16	0 ... 16 bar	0,5

Technical information


To set the operating range, the cover (inspection glass) must be removed. To do this, carefully lift the inspection glass by inserting a pointed or flat object in the slot provided for this purpose on the housing circumference.
Order axial seal separately

Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass
Viewing window	Polystyrene

Dimensions

Dimensions

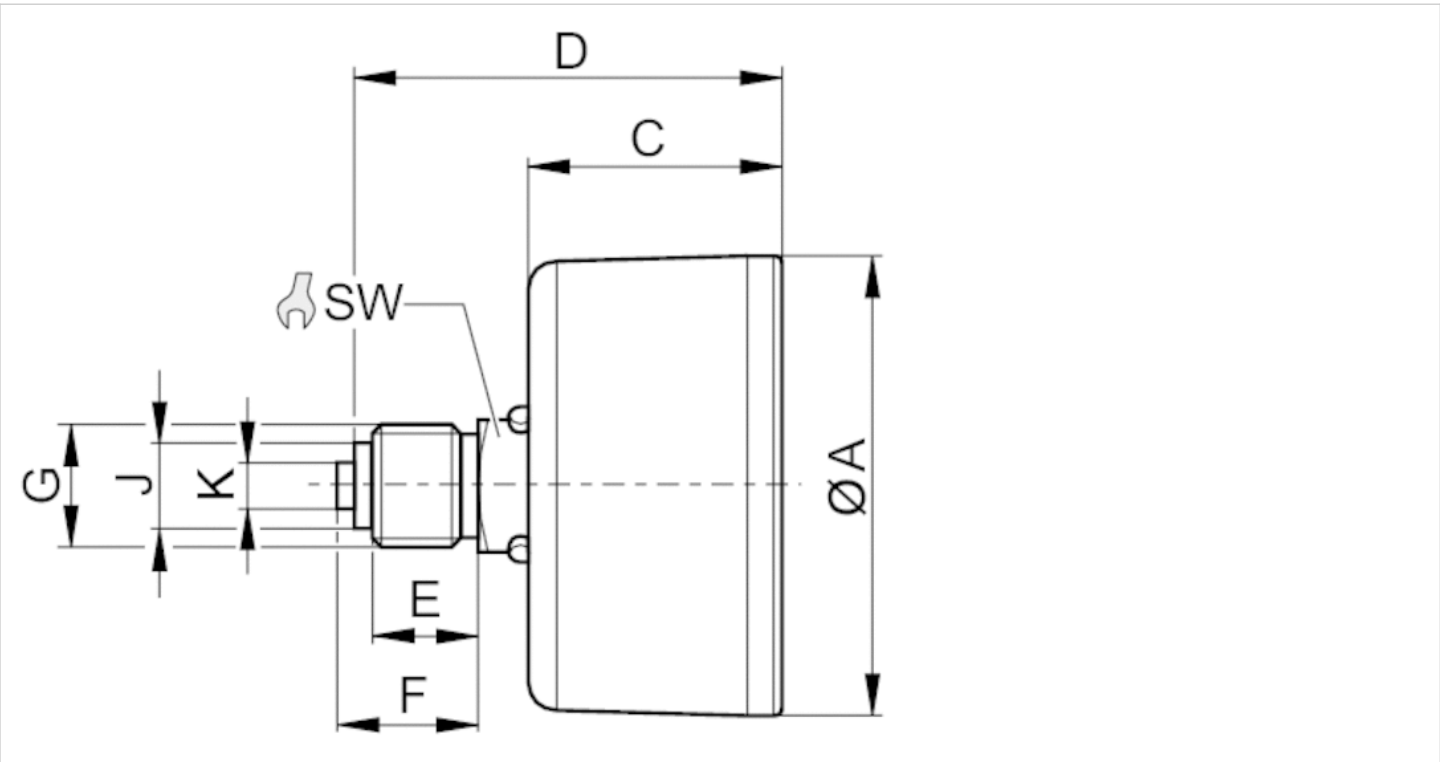

Dimensions


Compressed air connection	Nominal diameter	Ø A	C	D	E	F	J	K	SW
G 1/8	50 mm	49	26.5	41.5	8	10	8	–	14
G 1/4	50 mm	49	26.5	44.5	11	15	9.5	5	14

Pressure gauge, Series PG1-STD

- Back port
- corrosion-protected
- Background color White
- Scale color Black, Red
- Viewing window Polystyrene
- Units bar
- Units psi



Version	Bourdon tube pressure gauge
Seal	Axial
Standardization	EN 837-1
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	Black
Secondary scale unit (inside)	psi
Secondary scale color (inside)	Red
Background color	White
Pointer color	Black

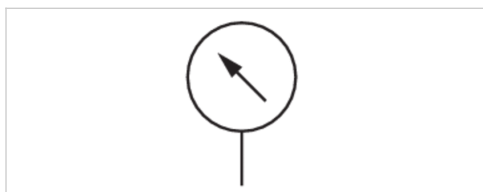

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value	Class
1827231052	M5	26 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	1	1,6
3530200160	R 1/8	40 mm	0 ... 2 bar	0 ... 2,5 bar	0 ... 3 bar	0,2	2,5
8901701290	G 1/8	26 mm	0 ... 3,2 bar	0 ... 4 bar	0 ... 4 bar	0,25	4
8901701270	G 1/8	26 mm	0 ... 10 bar	0 ... 12 bar	0 ... 12 bar	0,5	4
3530200130	R 1/8	40 mm	0 ... 1,2 bar	0 ... 1,6 bar	0 ... 1,6 bar	0,1	2,5
3530200120	R 1/8	40 mm	0 ... 3,2 bar	0 ... 4 bar	0 ... 4 bar	0,2	2,5
3530200110	R 1/8	40 mm	0 ... 4 bar	0 ... 6 bar	0 ... 6 bar	0,2	2,5
3530200100	R 1/8	40 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,5	2,5
3530200150	R 1/8	40 mm	0 ... 10 bar	0 ... 12 bar	0 ... 12 bar	0,5	2,5
3530200140	R 1/8	40 mm	0 ... 12 bar	0 ... 16 bar	0 ... 16 bar	0,5	2,5
3530190150	R 1/8	50 mm	0 ... 1,2 bar	0 ... 1,6 bar	0 ... 1,6 bar	0,1	2,5
3530190120	R 1/8	50 mm	0 ... 2,5 bar	0 ... 3 bar	0 ... 3 bar	0,2	2,5
3530190130	R 1/8	50 mm	0 ... 3,2 bar	0 ... 4 bar	0 ... 4 bar	0,2	2,5
3530190110	R 1/8	50 mm	0 ... 4 bar	0 ... 6 bar	0 ... 6 bar	0,2	2,5
3530190100	R 1/8	50 mm	0 ... 10 bar	0 ... 12 bar	0 ... 12 bar	0,5	2,5
3530190140	R 1/8	50 mm	0 ... 12 bar	0 ... 16 bar	0 ... 16 bar	0,5	2,5
8901702070	G 1/4	50 mm	0 ... 10 bar	0 ... 12 bar	0 ... 12 bar	0,5	2,5
8901702090	G 1/4	63 mm	0 ... 10 bar	0 ... 12 bar	0 ... 12 bar	0,5	2,5

Part No.	
1827231052	1)
3530200160	-
8901701290	-
8901701270	-
3530200130	-
3530200120	-
3530200110	-
3530200100	-
3530200150	-
3530200140	-
3530190150	-
3530190120	-
3530190130	-
3530190110	-
3530190100	-
3530190140	-
8901702070	-
8901702090	-

1) Suitable for use in Ex zones 1, 2, 21, 22

Technical information


Order axial seal separately

Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass
Viewing window	Polystyrene

Dimensions

Dimensions

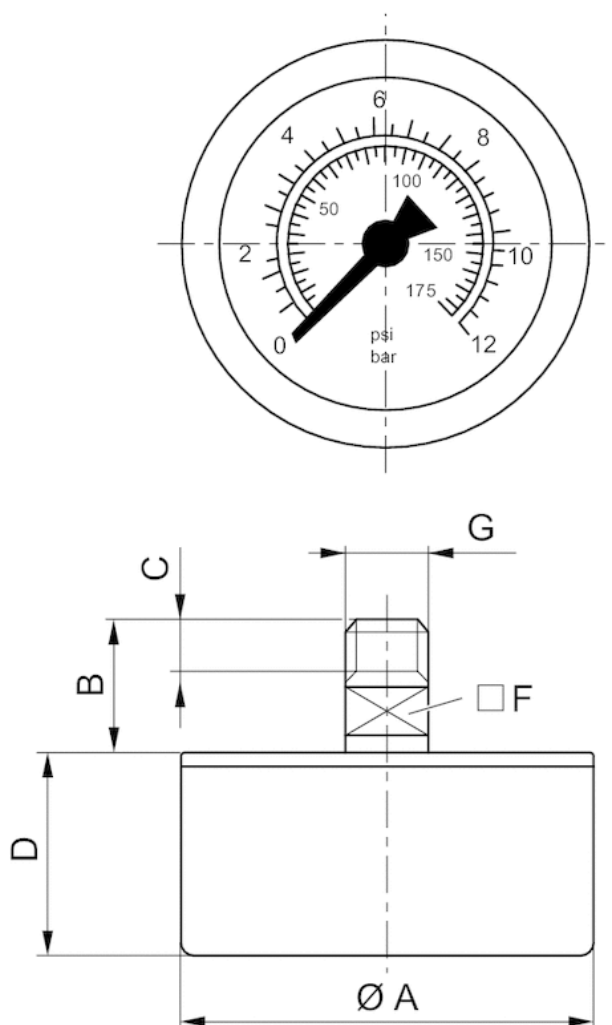

Dimensions in mm

Part No.	Compressed air connection	Nominal diameter	Ø A	B	C	D	F
1827231052	M5	26 mm	26	11.5	5	20	12
3530200160	R 1/8	40 mm	40	19	10	26	14
8901701290	G 1/8	26 mm	26	15.5	8	16.2	12
8901701270	G 1/8	26 mm	26	15.5	8	16.2	12
3530200130	R 1/8	40 mm	40	19	10	26	14
3530200120	R 1/8	40 mm	40	19	10	26	14
3530200110	R 1/8	40 mm	40	19	10	26	14
3530200100	R 1/8	40 mm	40	19	10	26	14
3530200150	R 1/8	40 mm	40	19	10	26	14
3530200140	R 1/8	40 mm	40	19	10	26	14
3530190150	R 1/8	50 mm	50	19	10	27	14
3530190120	R 1/8	50 mm	50	19	10	27	14
3530190130	R 1/8	50 mm	50	19	10	27	14
3530190110	R 1/8	50 mm	50	19	10	27	14
3530190100	R 1/8	50 mm	50	19	10	27	14


Part No.	Compressed air connection	Nominal diameter	Ø A	B	C	D	F
3530190140	R 1/8	50 mm	50	19	10	27	14
8901702070	G 1/4	50 mm	50	18	13	26.5	14
8901702090	G 1/4	63 mm	63	21	13	26.5	14

Pressure gauge, Series PG1-ROB

- Back port
- Background color Black
- Scale color White
- Viewing window Polystyrene
- Units MPa



Version	Bourdon tube pressure gauge
Medium	Compressed air, Compressed air
Main scale unit (outside)	MPa
Main scale color (outside)	White
Background color	Black
Pointer color	Red
Weight	0,01 kg

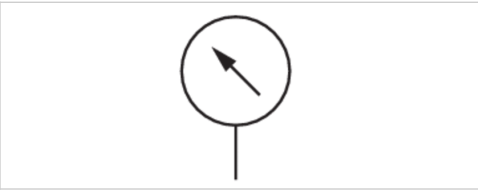

Technical data


Part No.	Compressed air connection	Nominal diameter	Range of application	Display range
R412009413	Ø 4	15 mm	0 ... 10 bar	0 ... 10 bar

Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass
Viewing window	Polystyrene
Seal	Polytetrafluorethylene


Dimensions

Dimensions in mm

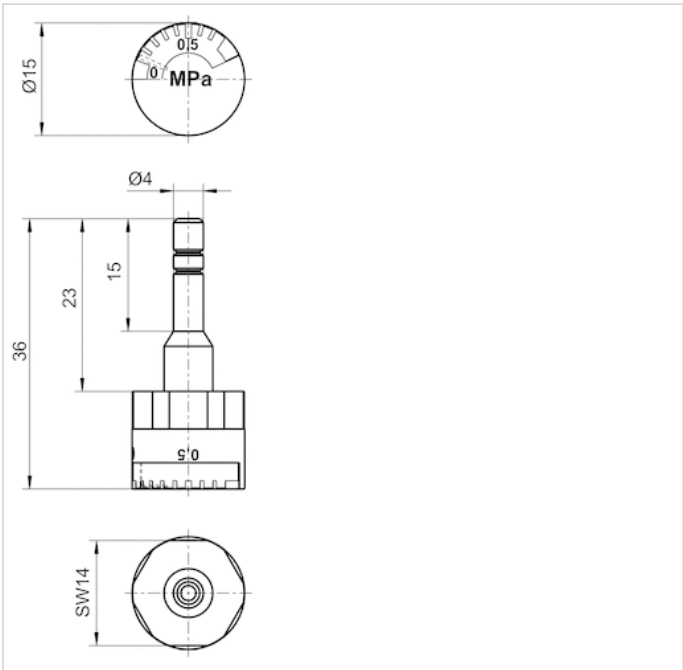

Pressure gauge, Series PG1-ROU

- Port on bottom
- Background color Black
- Scale color White, Red
- Viewing window Polystyrene
- Units bar
- Units psi

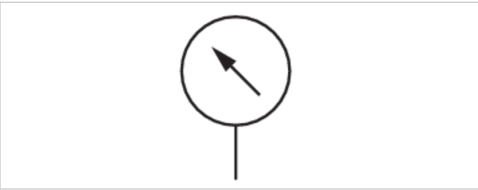

Version	Bourdon tube pressure gauge
Standardization	EN 837-1
Class	1,6
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	White
Secondary scale unit (inside)	psi
Secondary scale color (inside)	Red
Background color	Black
Pointer color	White

Technical data


Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
8901703200	R 1/8	50 mm	0 ... 10	0 ... 12	0 ... 12 bar	0,2

Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass
Viewing window	Polystyrene

Dimensions

Dimensions

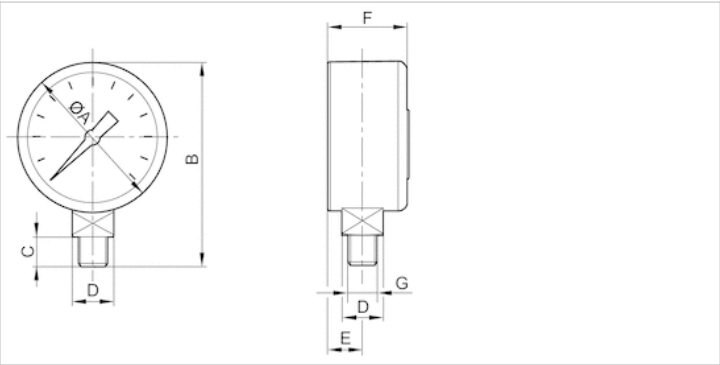


Dimensions in mm

Compressed air connection	Nominal diameter	Ø A	B	C	D	F	E
R 1/8	50 mm	50	66.5	10	SW14	27,5	10

Pressure gauge, Series PG1-PAN-ADJ

- Back port
- with adjustable work area display
- Background color Black
- Scale color Green, White
- Viewing window Polystyrene
- Units bar
- Units psi

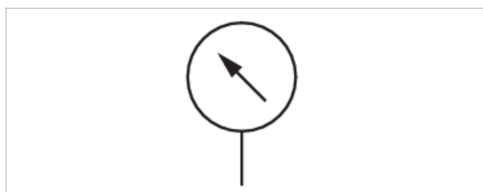

Version	Bourdon tube pressure gauge
Version	with adjustable work area display
Standardization	EN 837-1
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Work area	adjustable work area display
Work Area Display, Color	Red, Green
Main scale unit (outside)	bar
Main scale color (outside)	Green
Secondary scale unit (inside)	psi
Secondary scale color (inside)	White
Background color	Black
Pointer color	White
Weight	0,09 kg

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value	Class
R414010388	G 1/8	40 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,5	1,6
R414010389	G 1/8	40 mm	0 ... 12 bar	0 ... 16 bar	0 ... 10 bar	0,5	2,5
R414010390	G 1/4	50 mm	0 ... 2 bar	0 ... 2,5 bar	0 ... 10 bar	0,1	1,6
R414010391	G 1/4	50 mm	0 ... 4 bar	0 ... 6 bar	0 ... 10 bar	0,2	1,6
R414010392	G 1/4	50 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,05	1,6
R414010393	G 1/4	50 mm	0 ... 12 bar	0 ... 16 bar	0 ... 10 bar	0,5	1,6
R414010394	G 1/4	63 mm	0 ... 2 bar	0 ... 2,5 bar	0 ... 10 bar	0,1	1,6
R414010395	G 1/4	63 mm	0 ... 4 bar	0 ... 6 bar	0 ... 10 bar	0,2	1,6
R414010396	G 1/4	63 mm	0 ... 8 bar	0 ... 10 bar	0 ... 10 bar	0,5	1,6
R414010397	G 1/4	63 mm	0 ... 12 bar	0 ... 16 bar	0 ... 10 bar	0,5	1,6
R414010398	G 1/8	40 mm	-0,8 ... 0 bar	0 ... 1 bar	0 ... 10 bar	0,1	1,6
R414010399	G 1/8	40 mm	0 ... 4 bar	0 ... 6 bar	0 ... 10 bar	0,2	1,6
R414010400	G 1/8	40 mm	0 ... 2 bar	0 ... 2,5 bar	0 ... 10 bar	0,1	2,5

Technical information


To set the operating range, the cover (inspection glass) must be removed. To do this, carefully lift the inspection glass by inserting a pointed or flat object in the slot provided for this purpose on the housing circumference.

Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass
Viewing window	Polystyrene

Dimensions


Dimensions

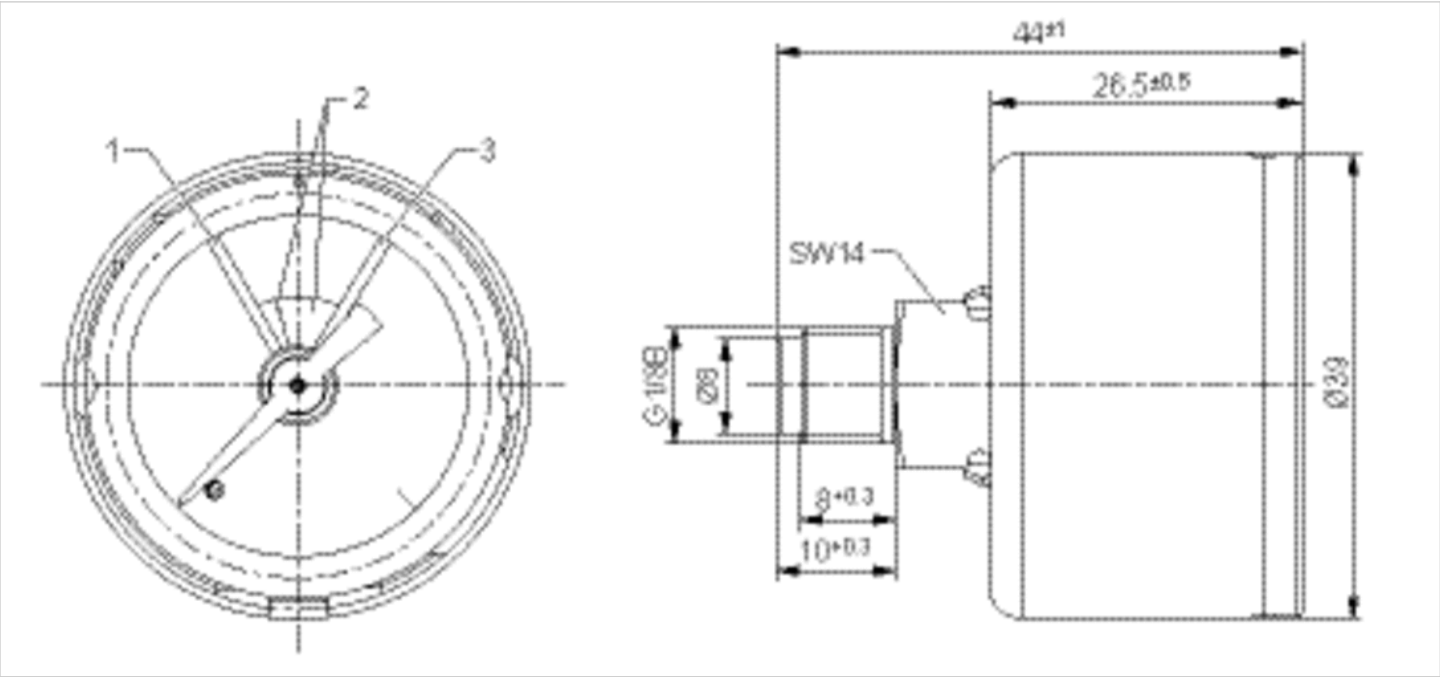

1 = red2 = green3 = red

Pressure gauge, Series PG1-SNL

- Back port
- Background color Black
- Scale color Green, White
- Viewing window Polystyrene
- Units bar
- Units psi
- suitable for ATEX

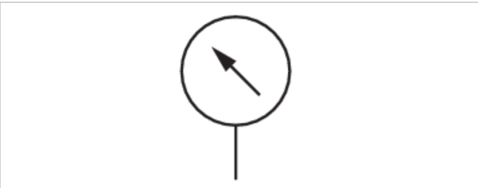

Version	Bourdon tube pressure gauge
Seal	Axial
Standardization	EN 837-1
Class	1,6
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	Green
Secondary scale unit (inside)	psi
Secondary scale color (inside)	White
Background color	Black
Pointer color	White
Weight	See table below

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
1827231018	G 1/8	40 mm	0 ... 4 bar	0 ... 6 bar	0 ... 6 bar	0,2
1827231023	G 1/4	50 mm	0 ... 1,2 bar	0 ... 1,6 bar	0 ... 1,6 bar	0,05

Part No.	Weight	
1827231018	0,06 kg	1)
1827231023	0,09 kg	-

Order seal 1829202004 separately

1) Suitable for use in Ex zones 1, 2, 21, 22

Technical information

Order axial seal separately


Technical information

Material

Housing	Acrylonitrile butadiene styrene
Thread	Brass
Front ring	Steel, chrome-plated
Viewing window	Polystyrene

Dimensions

Dimensions

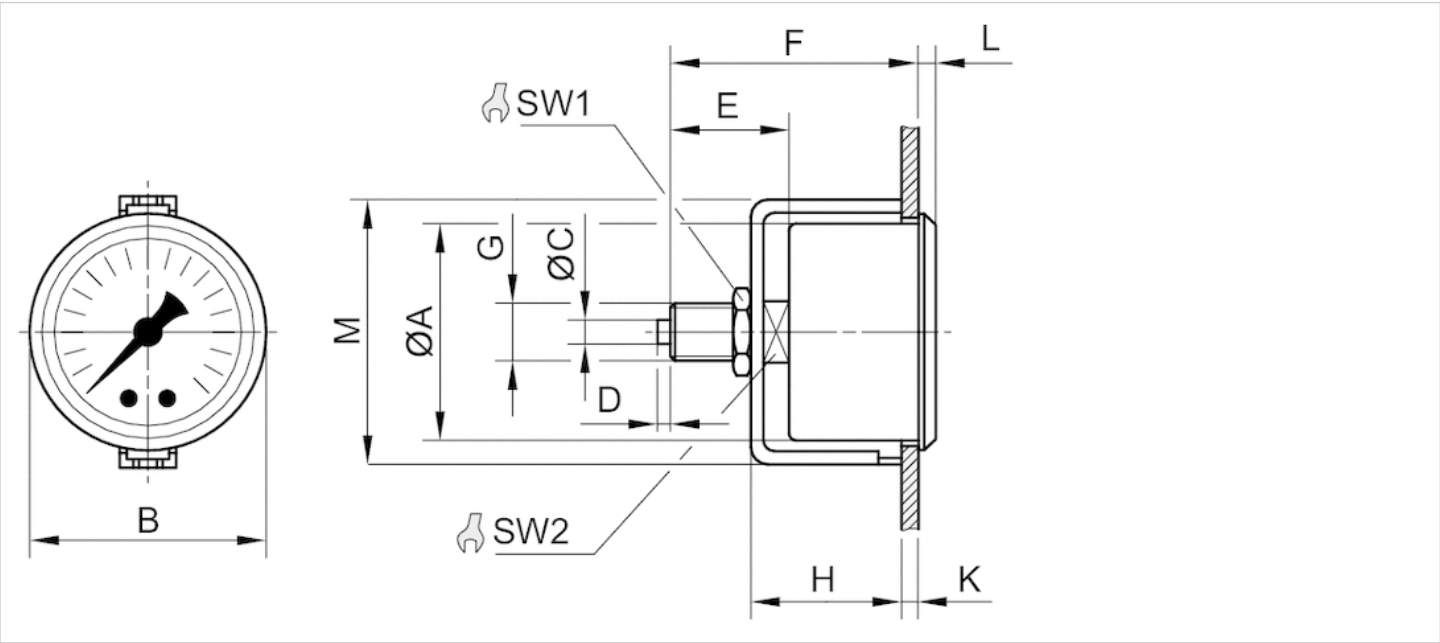

Dimensions in mm

Compressed air connection	Nominal diameter	Ø A	B	C	D	E	F	H	K	L	M	SW1	SW2
G 1/8	40 mm	40	43	–	–	25.5	49	32	4	4	49	17	14
G 1/4	50 mm	50	54	5	3	29.5	51.5	34.5	3	4.5	61	17	14

Series NU2

- Straight female stud fitting
- Internal thread
- G 1/4
- plug-in with tube nut
- Ø 4, Ø 6
- NU2-S-RAI



Working pressure min./max.

0 ... 10 bar

Ambient temperature min./max.

-10 ... 60 °C

Weight

0,01 kg

Weight per piece

Technical data

Part No.	Port G	Port D	Delivery unit
1823391082	G 1/4	Ø 4	10 piece
1823391083	G 1/4	Ø 6	10 piece

Technical information


For further information about assembling and tolerances of adaptable tubing can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Housing	Aluminum, anodized

Dimensions

Dimensions

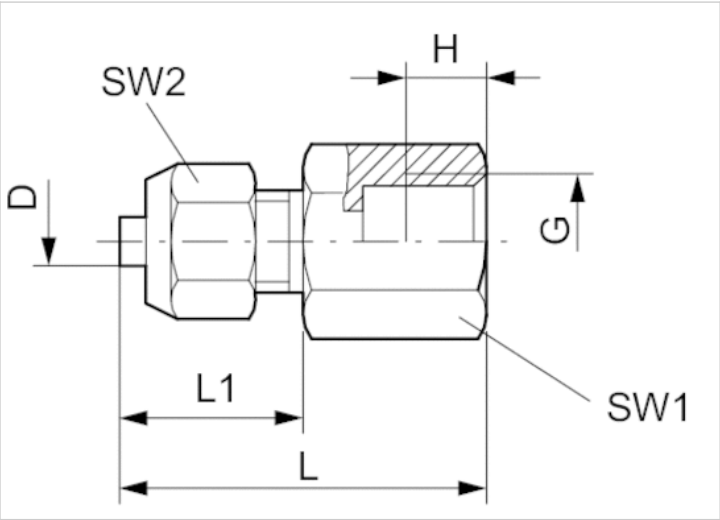

Dimensions

Part No.	Port D	Port G	H	L	L1	SW 1	SW 2
1823391082	Ø 4	G 1/4	8	27	13	17	11
1823391083	Ø 6	G 1/4	8	28	14	17	13

Connection D = inside diameter of the tubing to be used

Retaining ring, Series PG1-GLY




Technical data

Part No.	
3530132602	

Technical information

Material	
Material	Steel

Dimensions

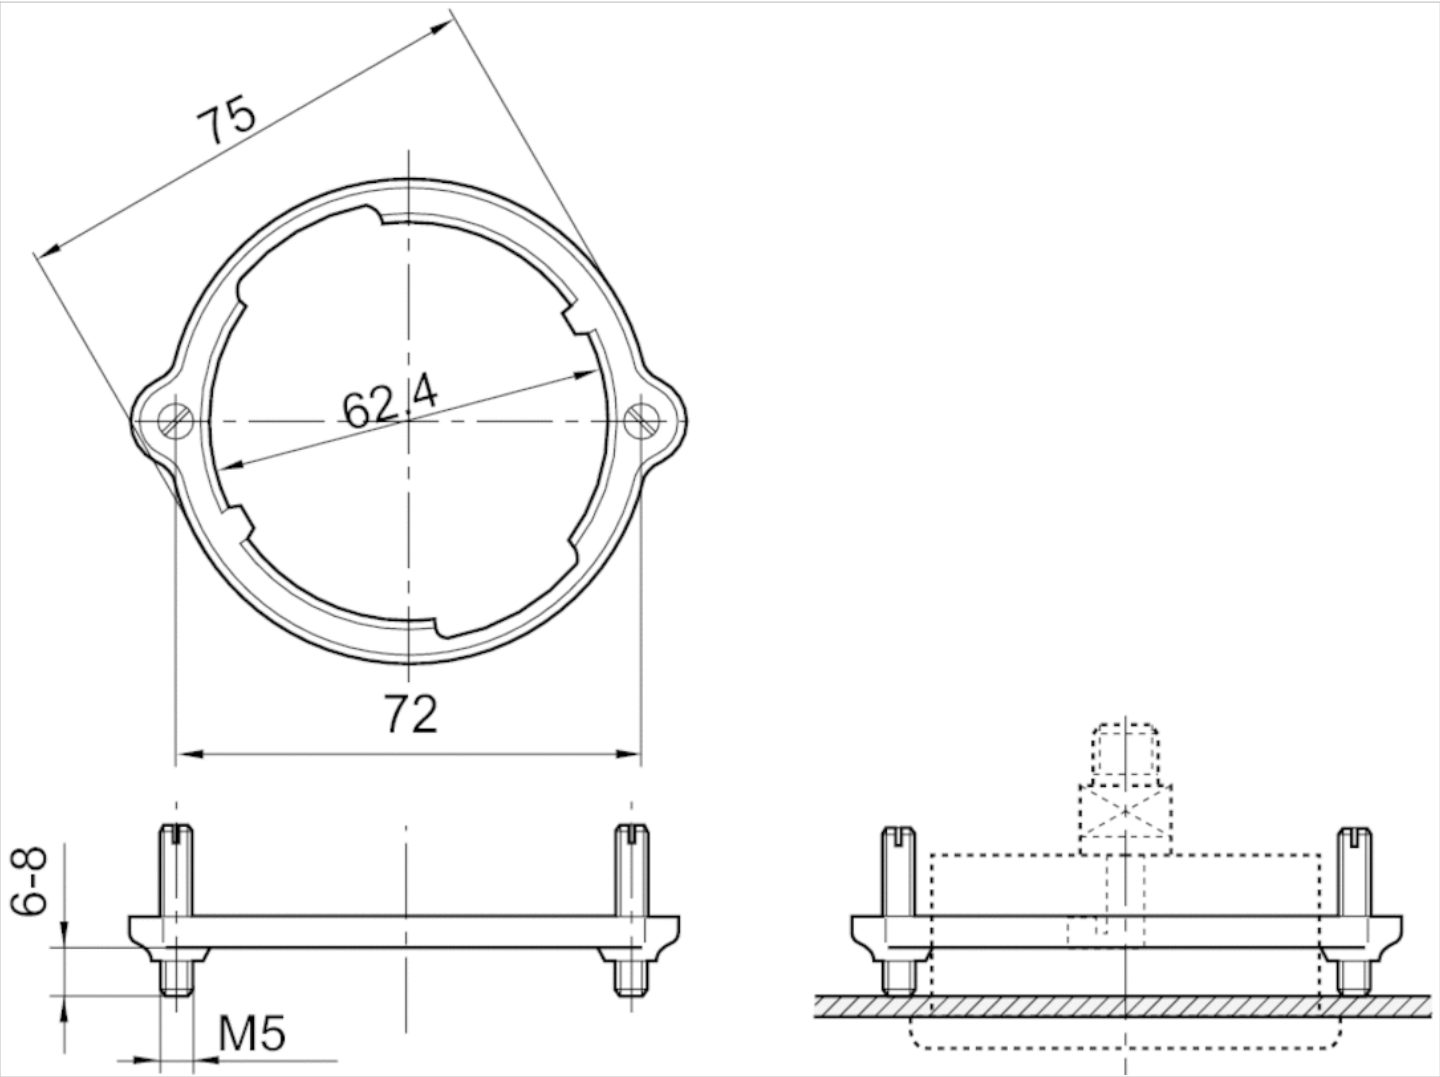

Sealing ring

- Copper



Working pressure min./max.

-0,95 ... 15 bar

Ambient temperature min./max.

-20 ... 150 °C


Technical data

Part No.	Delivery unit
1829202004	25 piece

Technical information

Material	
Material	Copper

Dimensions

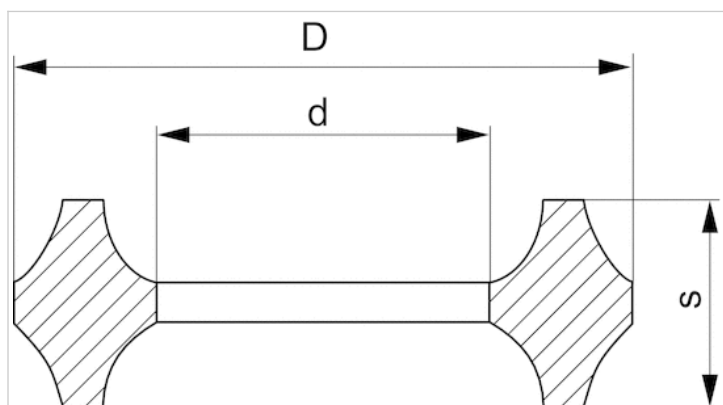

Dimensions

Part No.	G	Ød	ØD	s	Delivery quantity Pieces	Working pressure min./max.
1829202004	G1/4	5.2	9.5	3.2	25 piece	-0,95, 15 bar

G = thread size

Sealing ring

- Aluminum



Working pressure min./max.

-0,95 ... 15 bar

Ambient temperature min./max.

-20 ... 100 °C

Weight

0,37 kg


Technical data

Part No.	Delivery unit
8930601014	10 piece

Technical information

Material	
Material	Aluminum

Dimensions

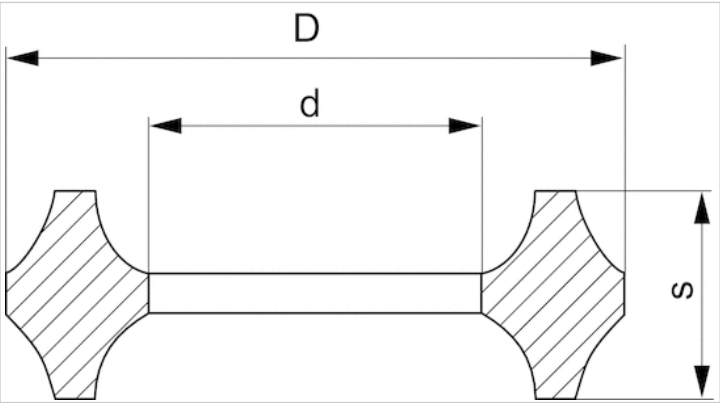

Dimensions

Part No.	G	Ød	ØD	s	Delivery quantity Pieces	Weight kg
8930601014	G1/4	6	11	3.5	10 piece	0,37 kg
Working pressure min./max.						
-0,95, 15 bar						

G = thread size

Sealing ring

- Copper



Working pressure min./max.

-0,95 ... 15 bar

Ambient temperature min./max.

-20 ... 150 °C

Technical data

Part No.	Delivery unit
R412026149	25 piece

Technical information

Material	
Material	Copper

Dimensions

Dimensions

