

5/2-directional valve, Series IS12, size 1

- ISO 5599-1
- ISO 1
- 5/2
- with air spring return, With spring return, with differential piston
- $Q_n = 1060 \text{ l/min}$
- Compressed air connection output Base plate ISO 5599-1
- Electrical connection Plug, M12, 3-pin
- Manual override without detent, with detent



Version	Spool valve, positive overlapping
Sealing principle	Soft sealing
Blocking principle	Single base plate principle
Connection type	Plate connection
Standards	ISO 5599-1, ISO 1
Working pressure min./max.	See table below
Control pressure min./max.	See table below
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air
Max. particle size	5 µm
Oil content of compressed air	0 ... 5 mg/m ³
Nominal flow Q_n	1060 l/min
Protection class, with connection	IP65
LED status display	Yellow
Nominal resistance	1480 Ω
Duty cycle	100 %
Typ. switch-on time	See table below
Typ. switch-off time	See table below
Mounting screw	M5 with hexagon socket
Mounting screw tightening torque	2,2 Nm
Weight	See table below

Technical data

Part No.		MO	Operational voltage DC	Voltage tolerance DC
0820024250			24 V	-10% / +10%
0820024251			24 V	-10% / +10%
0820024300			24 V	-10% / +10%
0820024301			24 V	-10% / +10%
0820024325			24 V	-10% / +10%
0820024326			24 V	-10% / +10%
0820024329			24 V	-10% / +10%
0820024330			24 V	-10% / +10%
0820024275			24 V	-10% / +10%
0820024276			24 V	-10% / +10%
0820024302			24 V	-10% / +10%
0820024303			24 V	-10% / +10%

Part No.		MO	Operational voltage DC	Voltage tolerance DC
0820024327			24 V	-10% / +10%
0820024328			24 V	-10% / +10%
0820024331			24 V	-10% / +10%
0820024332			24 V	-10% / +10%

Part No.	Power consumption DC	Pilot	Working pressure min./max.
0820024250	0,35 W	Internal	2 ... 10 bar
0820024251	0,35 W	External	-0,9 ... 10 bar
0820024300	0,35 W	Internal	2,2 ... 10 bar
0820024301	0,35 W	External	-0,9 ... 10 bar
0820024325	0,35 W	Internal	2 ... 10 bar
0820024326	0,35 W	External	-0,9 ... 10 bar
0820024329	0,35 W	Internal	2 ... 10 bar
0820024330	0,35 W	External	-0,9 ... 10 bar
0820024275	0,35 W	Internal	2 ... 10 bar
0820024276	0,35 W	External	-0,9 ... 10 bar
0820024302	0,35 W	Internal	2,2 ... 10 bar
0820024303	0,35 W	External	-0,9 ... 10 bar
0820024327	0,35 W	Internal	2 ... 10 bar
0820024328	0,35 W	External	-0,9 ... 10 bar
0820024331	0,35 W	Internal	2 ... 10 bar
0820024332	0,35 W	External	-0,9 ... 10 bar

Part No.	Control pressure min./max.	Typ. switch-on time	Typ. switch-off time
0820024250	2 ... 10 bar	18 ms	33 ms
0820024251	2 ... 10 bar	18 ms	33 ms
0820024300	2,2 ... 10 bar	18 ms	40 ms
0820024301	2,2 ... 10 bar	18 ms	40 ms
0820024325	1 ... 10 bar	16 ms	16 ms
0820024326	1 ... 10 bar	16 ms	16 ms
0820024329	1 ... 10 bar	-	-
0820024330	1 ... 10 bar	-	-
0820024275	2 ... 10 bar	18 ms	33 ms
0820024276	2 ... 10 bar	18 ms	33 ms
0820024302	2,2 ... 10 bar	18 ms	40 ms
0820024303	2,2 ... 10 bar	18 ms	40 ms
0820024327	1 ... 10 bar	16 ms	16 ms
0820024328	1 ... 10 bar	16 ms	16 ms
0820024331	1 ... 10 bar	-	-
0820024332	1 ... 10 bar	-	-

Part No.	Electrical connection Pilot valve	Weight
0820024250	Plug, M12, 3-pin	0,25 kg
0820024251	Plug, M12, 3-pin	0,25 kg

Part No.	Electrical connection Pilot valve	Weight
0820024300	Plug, M12, 3-pin	0,26 kg
0820024301	Plug, M12, 3-pin	0,26 kg
0820024325	Plug, M12, 3-pin	0,26 kg
0820024326	Plug, M12, 3-pin	0,26 kg
0820024329	Plug, M12, 3-pin	0,26 kg
0820024330	Plug, M12, 3-pin	0,26 kg
0820024275	Plug, M12, 3-pin	0,25 kg
0820024276	Plug, M12, 3-pin	0,25 kg
0820024302	Plug, M12, 3-pin	0,26 kg
0820024303	Plug, M12, 3-pin	0,26 kg
0820024327	Plug, M12, 3-pin	0,26 kg
0820024328	Plug, M12, 3-pin	0,26 kg
0820024331	Plug, M12, 3-pin	0,26 kg
0820024332	Plug, M12, 3-pin	0,26 kg

Nominal flow Q_n at 6 bar and $\Delta p = 1$ bar, MO = Manual override

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Housing	Polyamide
Seals	Acrylonitrile butadiene rubber
Front plate	Polyamide

Dimensions

Dimensions

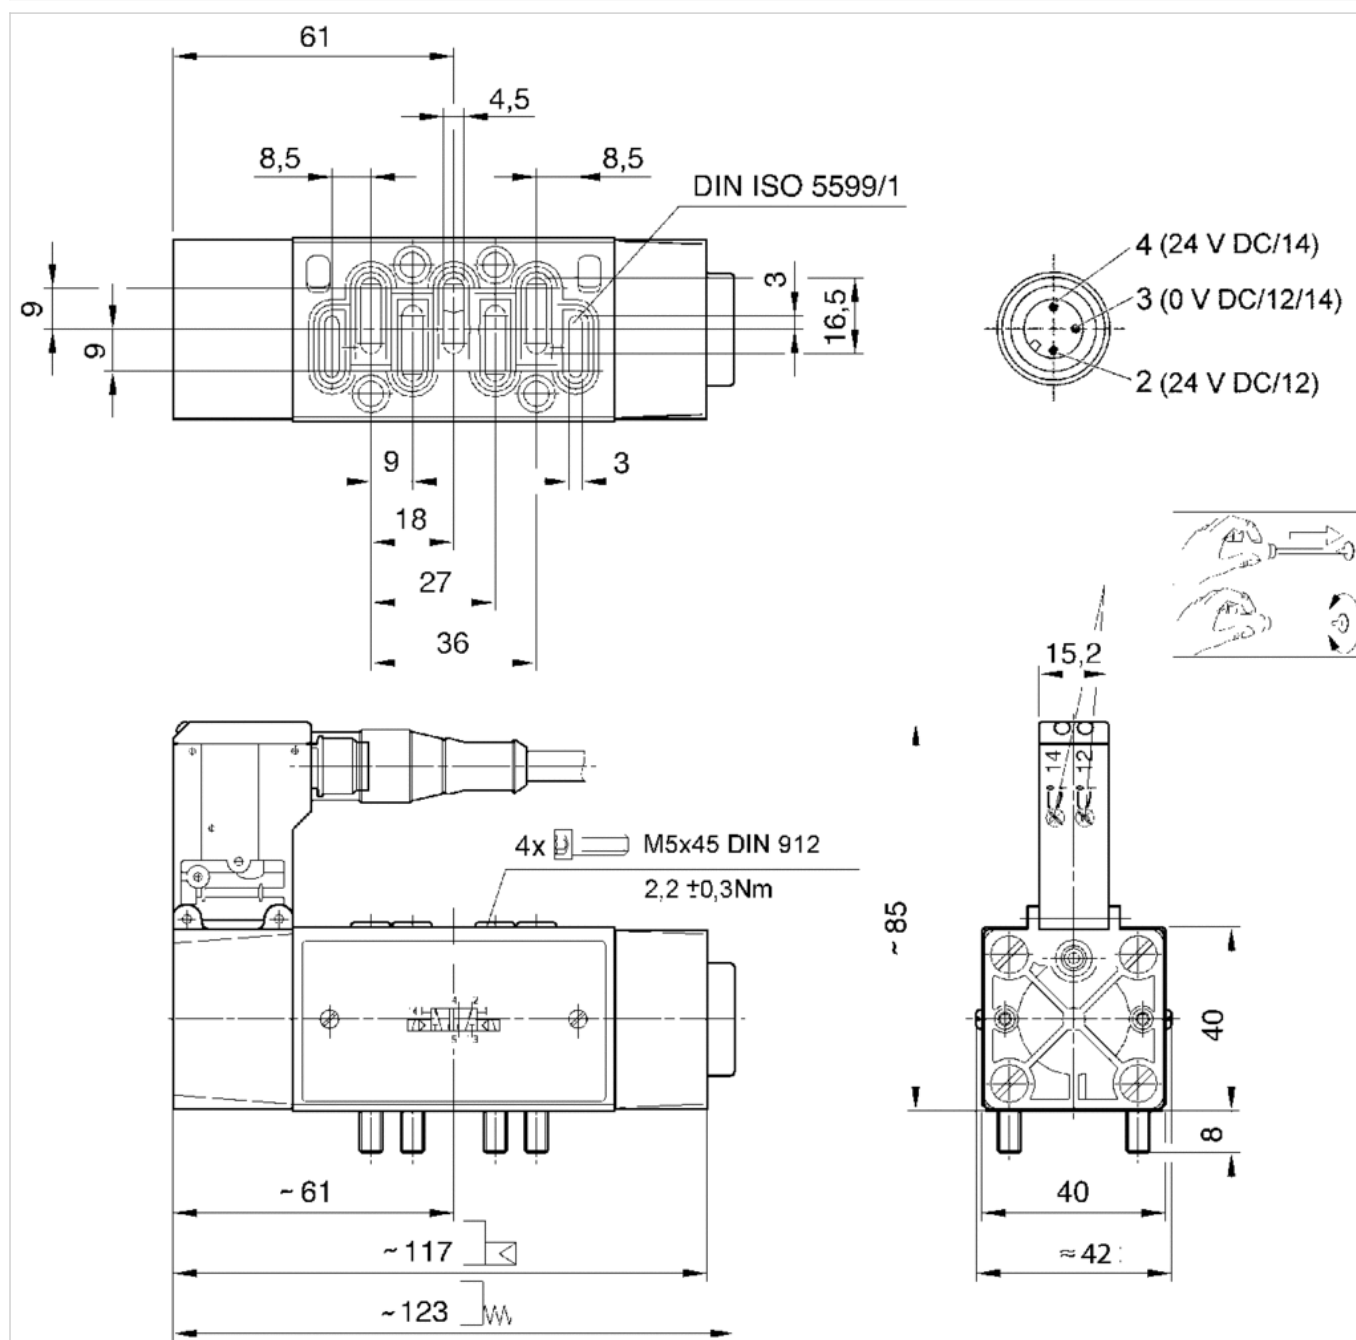

5/2-directional valve, Series IS12, size 1

- ISO 5599-1
- ISO 1
- 5/2
- with air spring return, With spring return
- Qn = 1060 l/min
- Compressed air connection output Base plate ISO 5599-1
- Electrical connection Plug, EN 175301-803, form A
- Manual override with detent, without detent



Version	Spool valve, positive overlapping
Sealing principle	Soft sealing
Blocking principle	Single base plate principle
Connection type	Plate connection
Standards	ISO 5599-1, ISO 1
ATEX class G	II 2G2D T4
Working pressure min./max.	See table below
Control pressure min./max.	See table below
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air
Max. particle size	5 µm
Oil content of compressed air	0 ... 5 mg/m³
Nominal flow Qn	1060 l/min
Protection class,with connection	IP65
Compatibility index	See table below
Duty cycle	100 %
Typ. switch-on time	See table below
Typ. switch-off time	See table below
Mounting screw	M5 with hexagon socket
Mounting screw tightening torque	2,2 Nm
Weight	See table below

Technical data

Part No.		MO	Operationalvoltage DC	Operationalvoltage AC 50 Hz	Operationalvoltage AC 60 Hz
0820024001			-	230 V	230 V
0820024002			24 V	-	-
0820024003			-	24 V	24 V
0820024004			-	110 V	110 V
0820024006			24 V	-	-
0820024990			-	-	-
0820024980			-	-	-
0820024025			-	230 V	230 V
R422000002			-	230 V	230 V
0820024026			24 V	-	-
0820024027			-	24 V	24 V
0820024028			-	110 V	110 V
0820024035			24 V	-	-
0820024991			-	-	-
0820024981			-	-	-
0820024501			-	230 V	230 V
R422000003			-	230 V	230 V
0820024502			24 V	-	-
0820024503			-	24 V	24 V
0820024504			-	110 V	110 V
0820024510			24 V	-	-
0820024992			-	-	-
0820024984			-	-	-
0820024051			-	230 V	230 V
0820024052			24 V	-	-
0820024053			-	24 V	24 V
0820024054			-	110 V	110 V
0820024060			24 V	-	-
0820024993			-	-	-
0820024982			-	-	-
0820024075			-	230 V	230 V
0820024076			24 V	-	-
0820024077			-	24 V	24 V
0820024078			-	110 V	110 V
0820024085			24 V	-	-
0820024994			-	-	-
0820024983			-	-	-
0820024551			-	230 V	230 V
0820024552			24 V	-	-
0820024553			-	24 V	24 V
0820024554			-	110 V	110 V
0820024560			24 V	-	-
0820024995			-	-	-
0820024985			-	-	-
0820024950			-	-	-

Part No.		MO	Operationalvoltage DC	Operationalvoltage AC 50 Hz	Operationalvoltage AC 60 Hz
0820024953			-	-	-
0820024951			-	-	-
0820024954			-	-	-
0820024952			-	-	-
0820024955			-	-	-
0820024960			-	-	-
0820024963			-	-	-
0820024961			-	-	-
0820024964			-	-	-
0820024962			-	-	-
0820024965			-	-	-

Part No.	Voltage tolerance DC	Voltage tolerance AC 50 Hz	Voltage tolerance AC 60 Hz	Power consumption DC
0820024001	-	-10% / +10%	-10% / +10%	-
0820024002	-10% / +10%	-	-	4,5 W
0820024003	-	-10% / +10%	-10% / +10%	-
0820024004	-	-10% / +10%	-10% / +10%	-
0820024006	-10% / +10%	-	-	2,7 W
0820024990	-	-	-	-
0820024980	-	-	-	-
0820024025	-	-10% / +10%	-10% / +10%	-
R422000002	-	-10% / +10%	-10% / +10%	-
0820024026	-10% / +10%	-	-	4,5 W
0820024027	-	-10% / +10%	-10% / +10%	-
0820024028	-	-10% / +10%	-10% / +10%	-
0820024035	-10% / +10%	-	-	2,7 W
0820024991	-	-	-	-
0820024981	-	-	-	-
0820024501	-	-10% / +10%	-10% / +10%	-
R422000003	-	-10% / +10%	-10% / +10%	-
0820024502	-10% / +10%	-	-	4,5 W
0820024503	-	-10% / +10%	-10% / +10%	-
0820024504	-	-10% / +10%	-10% / +10%	-
0820024510	-10% / +10%	-	-	2,7 W
0820024992	-	-	-	-
0820024984	-	-	-	-
0820024051	-	-10% / +10%	-10% / +10%	-
0820024052	-10% / +10%	-	-	4,5 W
0820024053	-	-10% / +10%	-10% / +10%	-
0820024054	-	-10% / +10%	-10% / +10%	-
0820024060	-10% / +10%	-	-	2,7 W
0820024993	-	-	-	-
0820024982	-	-	-	-
0820024075	-	-10% / +10%	-10% / +10%	-
0820024076	-10% / +10%	-	-	4,5 W
0820024077	-	-10% / +10%	-10% / +10%	-

Part No.	Voltage tolerance DC	Voltage tolerance AC 50 Hz	Voltage tolerance AC 60 Hz	Power consumption DC
0820024078	-	-10% / +10%	-10% / +10%	-
0820024085	-10% / +10%	-	-	2,7 W
0820024994	-	-	-	-
0820024983	-	-	-	-
0820024551	-	-10% / +10%	-10% / +10%	-
0820024552	-10% / +10%	-	-	4,5 W
0820024553	-	-10% / +10%	-10% / +10%	-
0820024554	-	-10% / +10%	-10% / +10%	-
0820024560	-10% / +10%	-	-	2,7 W
0820024995	-	-	-	-
0820024985	-	-	-	-
0820024950	-	-	-	-
0820024953	-	-	-	-
0820024951	-	-	-	-
0820024954	-	-	-	-
0820024952	-	-	-	-
0820024955	-	-	-	-
0820024960	-	-	-	-
0820024963	-	-	-	-
0820024961	-	-	-	-
0820024964	-	-	-	-
0820024962	-	-	-	-
0820024965	-	-	-	-

Part No.	Holding power AC 50 Hz	Holding power AC 60 Hz	Switch-on power AC 50 Hz	Switch-on power AC 60 Hz	Pilot
0820024001	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024002	-	-	-	-	Internal
0820024003	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024004	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024006	-	-	-	-	Internal
0820024990	-	-	-	-	Internal
0820024980	-	-	-	-	Internal
0820024025	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
R422000002	2,3 VA	-	3 VA	-	Internal
0820024026	-	-	-	-	Internal
0820024027	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024028	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024035	-	-	-	-	Internal
0820024991	-	-	-	-	Internal
0820024981	-	-	-	-	Internal
0820024501	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
R422000003	2,3 VA	-	3 VA	-	Internal
0820024502	-	-	-	-	Internal
0820024503	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024504	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024510	-	-	-	-	Internal

Part No.	Holding power AC 50 Hz	Holding power AC 60 Hz	Switch-on power AC 50 Hz	Switch-on power AC 60 Hz	Pilot
0820024992	-	-	-	-	Internal
0820024984	-	-	-	-	Internal
0820024051	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024052	-	-	-	-	Internal
0820024053	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024054	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024060	-	-	-	-	Internal
0820024993	-	-	-	-	Internal
0820024982	-	-	-	-	Internal
0820024075	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024076	-	-	-	-	Internal
0820024077	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024078	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024085	-	-	-	-	Internal
0820024994	-	-	-	-	Internal
0820024983	-	-	-	-	Internal
0820024551	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024552	-	-	-	-	Internal
0820024553	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024554	8 VA	5,6 VA	11,5 VA	9,5 VA	Internal
0820024560	-	-	-	-	Internal
0820024995	-	-	-	-	Internal
0820024985	-	-	-	-	Internal
0820024950	-	-	-	-	External
0820024953	-	-	-	-	External
0820024951	-	-	-	-	External
0820024954	-	-	-	-	External
0820024952	-	-	-	-	External
0820024955	-	-	-	-	External
0820024960	-	-	-	-	External
0820024963	-	-	-	-	External
0820024961	-	-	-	-	External
0820024964	-	-	-	-	External
0820024962	-	-	-	-	External
0820024965	-	-	-	-	External

Part No.	Nominal resistance	Working pressure min./max.	Control pressure min./max.
0820024001	2015 Ω	2 ... 10 bar	2 ... 10 bar
0820024002	128 Ω	2 ... 10 bar	2 ... 10 bar
0820024003	23,3 Ω	2 ... 10 bar	2 ... 10 bar
0820024004	530 Ω	2 ... 10 bar	2 ... 10 bar
0820024006	216 Ω	2 ... 10 bar	2 ... 10 bar
0820024990	-	2 ... 10 bar	2 ... 10 bar
0820024980	-	2 ... 10 bar	2 ... 10 bar
0820024025	2015 Ω	2,2 ... 10 bar	2,2 ... 10 bar
R422000002	5125 Ω	2,2 ... 10 bar	2,2 ... 10 bar

Part No.	Nominal resistance	Working pressure min./max.	Control pressure min./max.
0820024026	128 Ω	2,2 ... 10 bar	2,2 ... 10 bar
0820024027	23,3 Ω	2,2 ... 10 bar	2,2 ... 10 bar
0820024028	530 Ω	2,2 ... 10 bar	2,2 ... 10 bar
0820024035	216 Ω	2,2 ... 10 bar	2,2 ... 10 bar
0820024991	-	2,2 ... 10 bar	2,2 ... 10 bar
0820024981	-	2,2 ... 10 bar	2,2 ... 10 bar
0820024501	2015 Ω	1 ... 10 bar	1 ... 10 bar
R422000003	5125 Ω	1 ... 10 bar	1 ... 10 bar
0820024502	128 Ω	1 ... 10 bar	1 ... 10 bar
0820024503	23,3 Ω	1 ... 10 bar	1 ... 10 bar
0820024504	530 Ω	1 ... 10 bar	1 ... 10 bar
0820024510	216 Ω	1 ... 10 bar	1 ... 10 bar
0820024992	-	1 ... 10 bar	1 ... 10 bar
0820024984	-	1 ... 10 bar	1 ... 10 bar
0820024051	2015 Ω	2 ... 10 bar	2 ... 10 bar
0820024052	128 Ω	2 ... 10 bar	2 ... 10 bar
0820024053	23,3 Ω	2 ... 10 bar	2 ... 10 bar
0820024054	530 Ω	2 ... 10 bar	2 ... 10 bar
0820024060	216 Ω	2 ... 10 bar	2 ... 10 bar
0820024993	-	2 ... 10 bar	2 ... 10 bar
0820024982	-	2 ... 10 bar	2 ... 10 bar
0820024075	2015 Ω	2,2 ... 10 bar	2,2 ... 10 bar
0820024076	128 Ω	2,2 ... 10 bar	2,2 ... 10 bar
0820024077	23,3 Ω	2,2 ... 10 bar	2,2 ... 10 bar
0820024078	530 Ω	2,2 ... 10 bar	2,2 ... 10 bar
0820024085	216 Ω	2,2 ... 10 bar	2,2 ... 10 bar
0820024994	-	2,2 ... 10 bar	2,2 ... 10 bar
0820024983	-	2,2 ... 10 bar	2,2 ... 10 bar
0820024551	2015 Ω	1 ... 10 bar	1 ... 10 bar
0820024552	128 Ω	1 ... 10 bar	1 ... 10 bar
0820024553	23,3 Ω	1 ... 10 bar	1 ... 10 bar
0820024554	530 Ω	1 ... 10 bar	1 ... 10 bar
0820024560	216 Ω	1 ... 10 bar	1 ... 10 bar
0820024995	-	1 ... 10 bar	1 ... 10 bar
0820024985	-	1 ... 10 bar	1 ... 10 bar
0820024950	-	-0,9 ... 10 bar	2 ... 10 bar
0820024953	-	-0,9 ... 10 bar	2 ... 10 bar
0820024951	-	-0,9 ... 10 bar	2,2 ... 10 bar
0820024954	-	-0,9 ... 10 bar	2,2 ... 10 bar
0820024952	-	-0,9 ... 10 bar	1 ... 10 bar
0820024955	-	-0,9 ... 10 bar	1 ... 10 bar
0820024960	-	-0,9 ... 10 bar	2 ... 10 bar
0820024963	-	-0,9 ... 10 bar	2 ... 10 bar
0820024961	-	-0,9 ... 10 bar	2,2 ... 10 bar
0820024964	-	-0,9 ... 10 bar	2,2 ... 10 bar
0820024962	-	-0,9 ... 10 bar	1 ... 10 bar
0820024965	-	-0,9 ... 10 bar	1 ... 10 bar

Part No.	Typ. switch-on time	Typ. switch-off time	Compatibility index
0820024001	18 ms	33 ms	15
0820024002	18 ms	33 ms	15
0820024003	18 ms	33 ms	15
0820024004	18 ms	33 ms	15
0820024006	18 ms	33 ms	-
0820024990	18 ms	33 ms	15
0820024980	18 ms	33 ms	-
0820024025	18 ms	40 ms	15
R422000002	18 ms	40 ms	12
0820024026	18 ms	40 ms	15
0820024027	18 ms	40 ms	15
0820024028	18 ms	40 ms	15
0820024035	18 ms	40 ms	-
0820024991	18 ms	40 ms	15
0820024981	18 ms	40 ms	-
0820024501	16 ms	16 ms	15
R422000003	16 ms	16 ms	12
0820024502	16 ms	16 ms	15
0820024503	16 ms	16 ms	15
0820024504	16 ms	16 ms	15
0820024510	16 ms	16 ms	-
0820024992	16 ms	16 ms	15
0820024984	16 ms	16 ms	-
0820024051	18 ms	33 ms	15
0820024052	18 ms	33 ms	15
0820024053	18 ms	33 ms	15
0820024054	18 ms	33 ms	15
0820024060	18 ms	33 ms	14
0820024993	18 ms	33 ms	15
0820024982	18 ms	33 ms	14
0820024075	18 ms	40 ms	15
0820024076	18 ms	40 ms	15
0820024077	18 ms	40 ms	15
0820024078	18 ms	40 ms	15
0820024085	18 ms	40 ms	14
0820024994	18 ms	40 ms	15
0820024983	18 ms	40 ms	14
0820024551	16 ms	16 ms	15
0820024552	16 ms	16 ms	15
0820024553	16 ms	16 ms	15
0820024554	16 ms	16 ms	15
0820024560	16 ms	16 ms	14
0820024995	16 ms	16 ms	15
0820024985	16 ms	16 ms	14
0820024950	18 ms	33 ms	-
0820024953	18 ms	33 ms	14
0820024951	18 ms	40 ms	-
0820024954	18 ms	40 ms	14

Part No.	Typ. switch-on time	Typ. switch-off time	Compatibility index
0820024952	16 ms	16 ms	-
0820024955	16 ms	16 ms	14
0820024960	18 ms	33 ms	15
0820024963	18 ms	33 ms	15
0820024961	18 ms	40 ms	15
0820024964	18 ms	40 ms	15
0820024962	16 ms	16 ms	15
0820024965	16 ms	16 ms	15

Part No.	Electrical connection Pilot valve	basic valve with electrical connector	ATEX
0820024001	Plug, EN 175301-803, form A	-	-
0820024002	Plug, EN 175301-803, form A	-	-
0820024003	Plug, EN 175301-803, form A	-	-
0820024004	Plug, EN 175301-803, form A	-	-
0820024006	Plug, EN 175301-803, form A	-	-
0820024990	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024980	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024025	Plug, EN 175301-803, form A	-	-
R422000002	Plug, EN 175301-803, form A	-	-
0820024026	Plug, EN 175301-803, form A	-	-
0820024027	Plug, EN 175301-803, form A	-	-
0820024028	Plug, EN 175301-803, form A	-	-
0820024035	Plug, EN 175301-803, form A	-	-
0820024991	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024981	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024501	Plug, EN 175301-803, form A	-	-
R422000003	Plug, EN 175301-803, form A	-	-
0820024502	Plug, EN 175301-803, form A	-	-
0820024503	Plug, EN 175301-803, form A	-	-
0820024504	Plug, EN 175301-803, form A	-	-
0820024510	Plug, EN 175301-803, form A	-	-
0820024992	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024984	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024051	Plug, EN 175301-803, form A	-	-
0820024052	Plug, EN 175301-803, form A	-	-
0820024053	Plug, EN 175301-803, form A	-	-
0820024054	Plug, EN 175301-803, form A	-	-
0820024060	Plug, EN 175301-803, form A	-	-
0820024993	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024982	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024075	Plug, EN 175301-803, form A	-	-
0820024076	Plug, EN 175301-803, form A	-	-
0820024077	Plug, EN 175301-803, form A	-	-
0820024078	Plug, EN 175301-803, form A	-	-
0820024085	Plug, EN 175301-803, form A	-	-
0820024994	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX

Part No.	Electrical connection Pilot valve	basic valve with electrical connector	ATEX
0820024983	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024551	Plug, EN 175301-803, form A	-	-
0820024552	Plug, EN 175301-803, form A	-	-
0820024553	Plug, EN 175301-803, form A	-	-
0820024554	Plug, EN 175301-803, form A	-	-
0820024560	Plug, EN 175301-803, form A	-	-
0820024995	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024985	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024950	Plug, EN 175301-803, form A	Basic valve without coil	-
0820024953	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024951	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024954	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024952	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024955	Plug, EN 175301-803, form A	Basic valve without coil	suitable for ATEX
0820024960	Plug, EN 175301-803, form A	Basic valve without coil	-
0820024963	Plug, EN 175301-803, form A	Basic valve without coil	-
0820024961	Plug, EN 175301-803, form A	Basic valve without coil	-
0820024964	Plug, EN 175301-803, form A	Basic valve without coil	-
0820024962	Plug, EN 175301-803, form A	Basic valve without coil	-
0820024965	Plug, EN 175301-803, form A	Basic valve without coil	-

Part No.	Weight	
0820024001	0,37 kg	-
0820024002	0,37 kg	-
0820024003	0,37 kg	-
0820024004	0,37 kg	-
0820024006	0,37 kg	1)
0820024990	0,27 kg	2)
0820024980	0,27 kg	3)
0820024025	0,37 kg	-
R422000002	0,37 kg	4)
0820024026	0,37 kg	-
0820024027	0,37 kg	-
0820024028	0,37 kg	-
0820024035	0,37 kg	1)
0820024991	0,28 kg	2)
0820024981	0,28 kg	3)
0820024501	0,52 kg	-
R422000003	0,52 kg	4)
0820024502	0,52 kg	-
0820024503	0,52 kg	-
0820024504	0,52 kg	-
0820024510	0,52 kg	1)
0820024992	0,33 kg	2)
0820024984	0,33 kg	3)
0820024051	0,37 kg	-

Part No.	Weight	
0820024052	0,37 kg	-
0820024053	0,37 kg	-
0820024054	0,37 kg	-
0820024060	0,37 kg	-
0820024993	0,27 kg	2)
0820024982	0,27 kg	3)
0820024075	0,37 kg	-
0820024076	0,37 kg	-
0820024077	0,37 kg	-
0820024078	0,37 kg	-
0820024085	0,37 kg	1)
0820024994	0,28 kg	2)
0820024983	0,28 kg	3)
0820024551	0,52 kg	-
0820024552	0,52 kg	-
0820024553	0,52 kg	-
0820024554	0,52 kg	-
0820024560	0,52 kg	1)
0820024995	0,33 kg	2)
0820024985	0,33 kg	3)
0820024950	0,27 kg	3)
0820024953	0,27 kg	3)
0820024951	0,28 kg	3)
0820024954	0,28 kg	3)
0820024952	0,33 kg	3)
0820024955	0,33 kg	3)
0820024960	0,27 kg	-
0820024963	0,27 kg	-
0820024961	0,28 kg	-
0820024964	0,28 kg	-
0820024962	0,33 kg	-
0820024965	0,33 kg	-

Nominal flow Q_n at 6 bar and $\Delta p = 1$ bar, MO = Manual override

1) Low power consumption

2) II 2G2D T4X

3) Low power consumption, II 2G2D T4X

4) reduced switch-on and holding power

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).


ATEX optional: ATEX version can be produced by combining the basic valve without coil with an ATEX coil. ATEX ID: see ATEX coils catalog page.

Technical information

Housing	Polyamide
Seals	Acrylonitrile butadiene rubber
Front plate	Polyamide

Dimensions

Dimensions

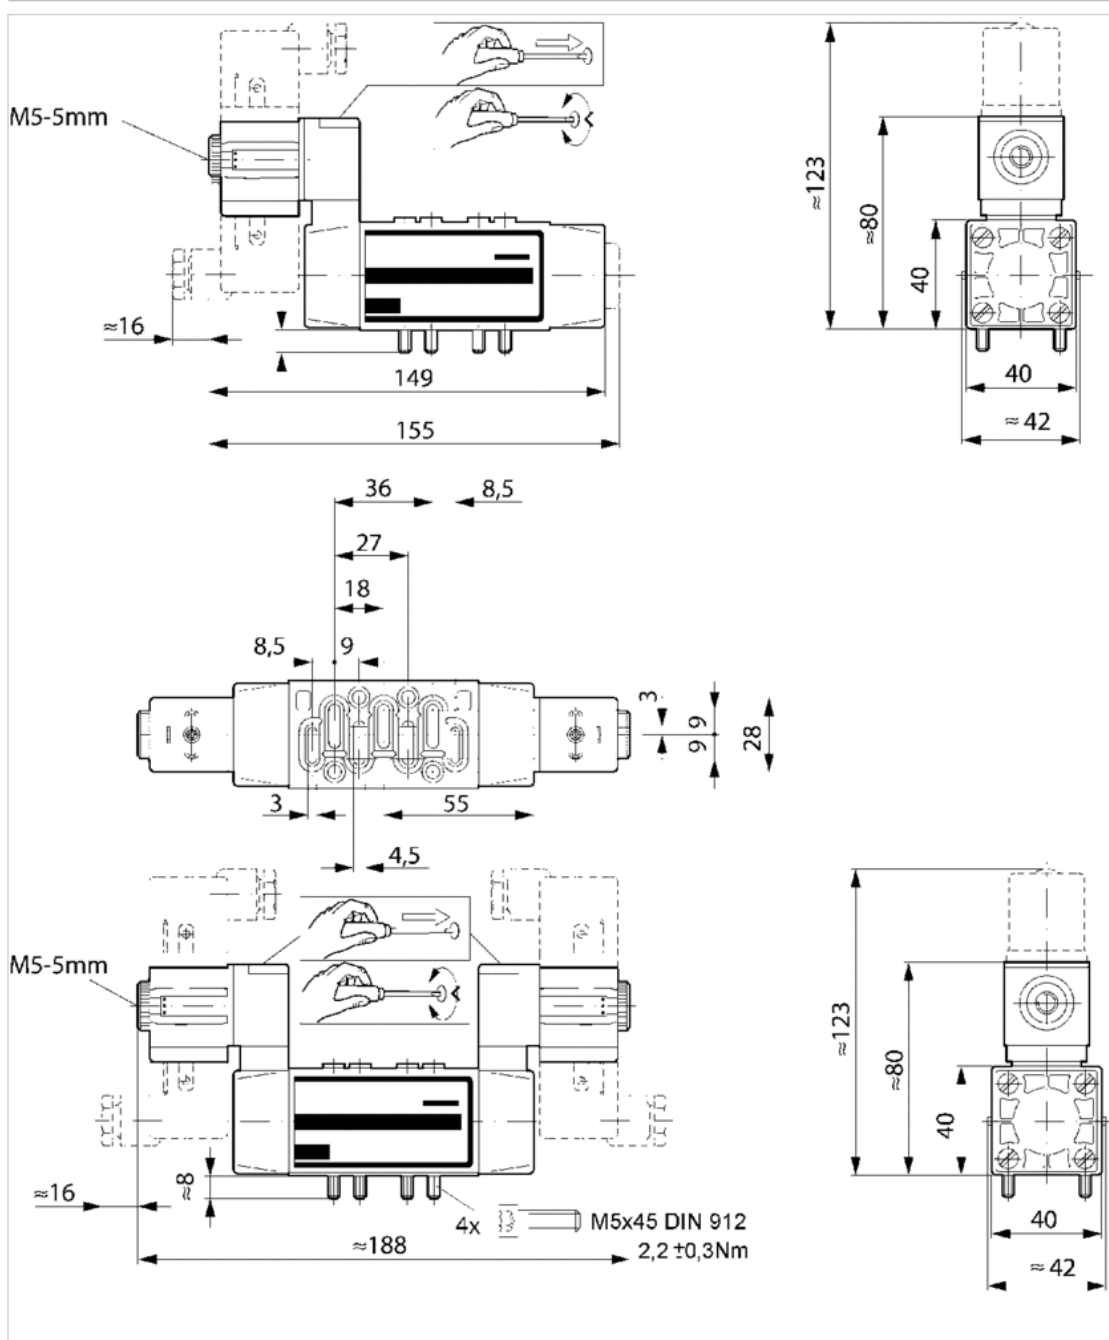





5/3-directional valve, Series IS12, size 1

- ISO 5599-1
- ISO 1
- 5/3
- Qn = 880 l/min
- Compressed air connection output Base plate ISO 5599-1
- Electrical connection Plug, M12, 3-pin
- Manual override without detent, with detent



Version	Spool valve, positive overlapping
Sealing principle	Soft sealing
Blocking principle	Single base plate principle
Connection type	Plate connection
Standards	ISO 5599-1, ISO 1
Working pressure min./max.	See table below
Control pressure min./max.	2,5 ... 10 bar
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air
Max. particle size	5 µm
Oil content of compressed air	0 ... 5 mg/m³
Nominal flow Qn	880 l/min
Protection class,with connection	IP65
LED status display	Yellow
Nominal resistance	1480 Ω
Duty cycle	100 %
Typ. switch-on time	See table below
Typ. switch-off time	See table below
Mounting screw	M5 with hexagon socket
Mounting screw tightening torque	2,2 Nm
Weight	0,31 kg

Technical data

Part No.		MO	Operationalvoltage DC	Voltage tolerance DC
0820027275			24 V	-10% / +10%
0820027276			24 V	-10% / +10%
0820027300			24 V	-10% / +10%
0820027301			24 V	-10% / +10%
0820027325			24 V	-10% / +10%
0820027326			24 V	-10% / +10%
0820027277			24 V	-10% / +10%
0820027278			24 V	-10% / +10%
0820027302			24 V	-10% / +10%
0820027303			24 V	-10% / +10%
0820027327			24 V	-10% / +10%
0820027328			24 V	-10% / +10%

Part No.	Power consumption DC	Pilot	Working pressure min./max.
0820027275	0,35 W	Internal	2,5 ... 10 bar
0820027276	0,35 W	External	-0,9 ... 10 bar
0820027300	0,35 W	Internal	2,5 ... 10 bar
0820027301	0,35 W	External	-0,9 ... 10 bar
0820027325	0,35 W	Internal	2,5 ... 10 bar
0820027326	0,35 W	External	-0,9 ... 10 bar
0820027277	0,35 W	Internal	2,5 ... 10 bar
0820027278	0,35 W	External	-0,9 ... 10 bar
0820027302	0,35 W	Internal	2,5 ... 10 bar
0820027303	0,35 W	External	-0,9 ... 10 bar
0820027327	0,35 W	Internal	2,5 ... 10 bar
0820027328	0,35 W	External	-0,9 ... 10 bar

Part No.	Typ. switch-on time	Typ. switch-off time	Electrical connection Pilot valve
0820027275	16 ms	-	Plug, M12, 3-pin
0820027276	16 ms	-	Plug, M12, 3-pin
0820027300	-	-	Plug, M12, 3-pin
0820027301	-	-	Plug, M12, 3-pin
0820027325	15 ms	29 ms	Plug, M12, 3-pin
0820027326	15 ms	29 ms	Plug, M12, 3-pin
0820027277	16 ms	-	Plug, M12, 3-pin
0820027278	16 ms	-	Plug, M12, 3-pin
0820027302	-	-	Plug, M12, 3-pin
0820027303	-	-	Plug, M12, 3-pin
0820027327	15 ms	29 ms	Plug, M12, 3-pin
0820027328	15 ms	29 ms	Plug, M12, 3-pin

Nominal flow Q_n at 6 bar and $\Delta p = 1$ bar, MO = Manual override

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Housing	Polyamide
Seals	Acrylonitrile butadiene rubber
Front plate	Polyamide

Dimensions

Dimensions

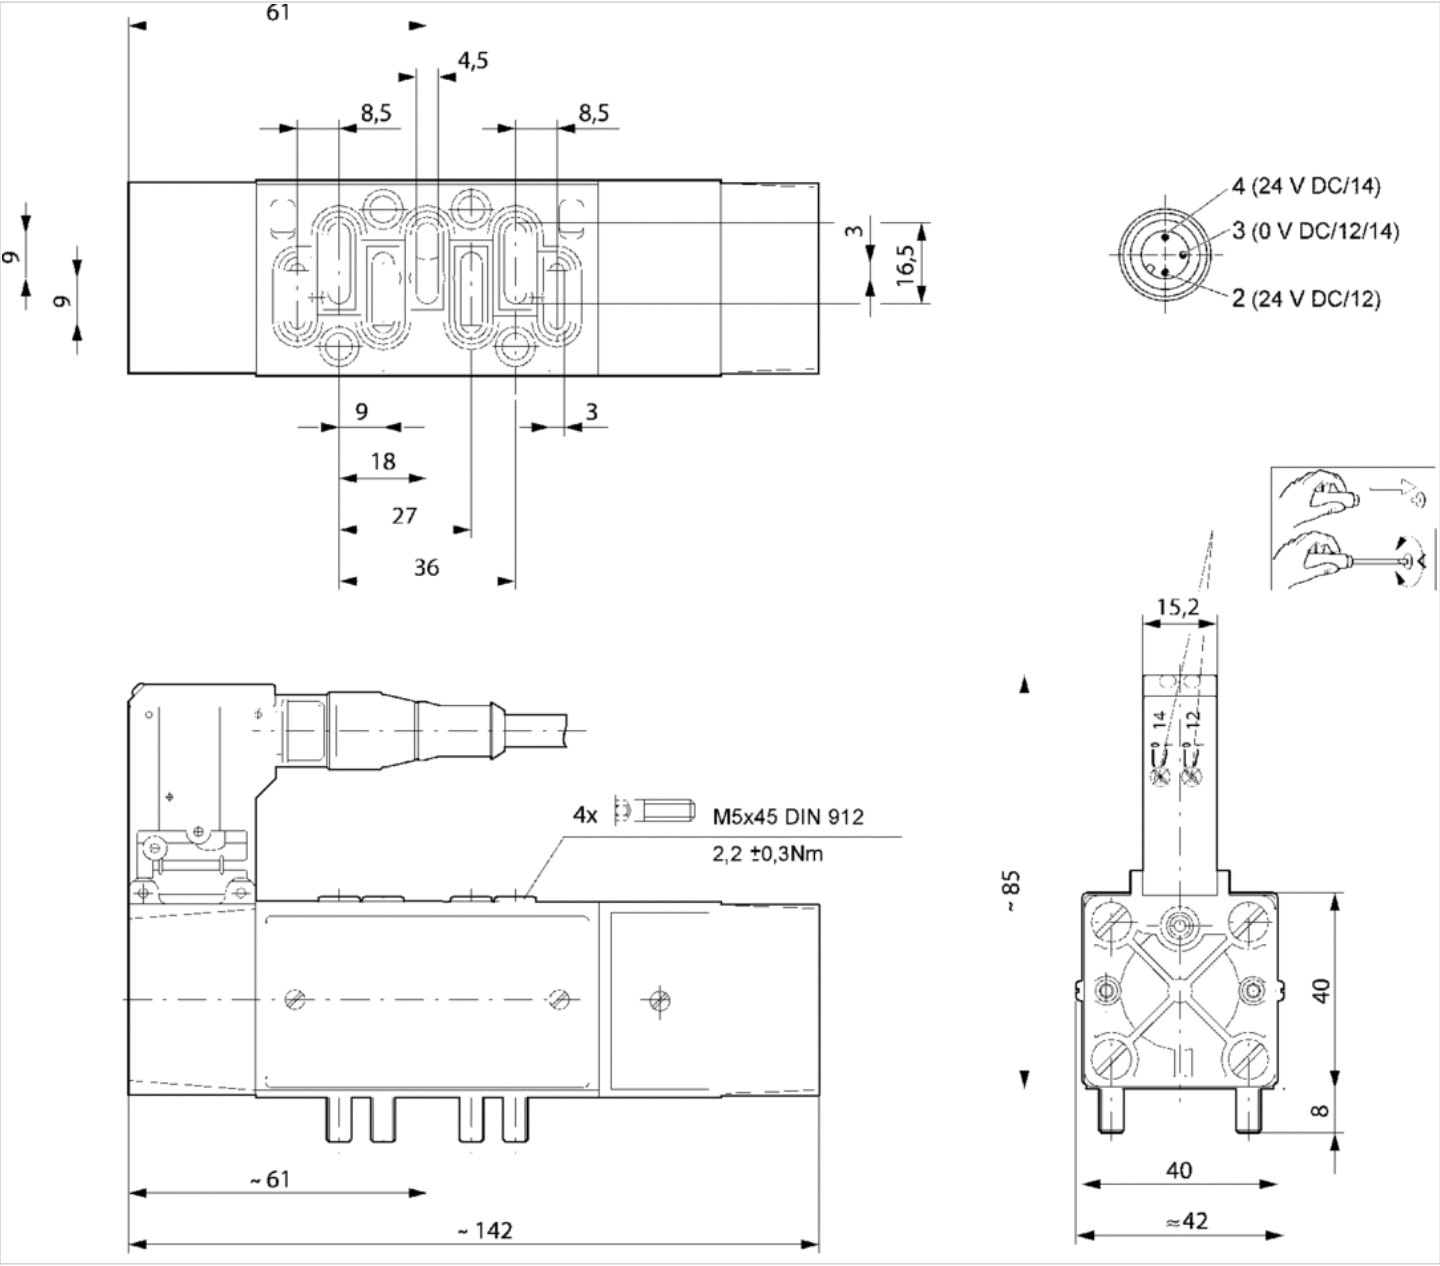

5/2-directional valve, Series IS12-PD, size 1

- ISO 5599-1
- ISO 1
- 5/2
- With spring return
- $Q_n = 1060 \text{ l/min}$
- Compressed air connection output Base plate DIN ISO 5599 size 1
- Electrical connection Plug, EN 175301-803, form A, Plug, M12
- Manual override without detent, without



Version	Spool valve, positive overlapping
Sealing principle	Soft sealing
Blocking principle	Single base plate principle
Connection type	Plate connection
Standards	ISO 5599-1, ISO 1
Working pressure min./max.	See table below
Control pressure min./max.	3 ... 10 bar
Ambient temperature min./max.	0 ... 50 °C
Medium temperature min./max.	0 ... 50 °C
Medium	Compressed air
Max. particle size	5 µm
Oil content of compressed air	0 ... 0,01 mg/m ³
Nominal flow Q_n	1060 l/min
Protection class, with connection	IP65
Compatibility index	15
Duty cycle	100 %
Switch-on time, max.	18 ms
Switch-off time, max.	40 ms
Version sensor	electronic PNP, with LED
Sensor connection	Plug, M8, 3-pin, with knurled screw
Operating voltage sensor DC min./max.	10 ... 30 V DC
Voltage drop sensor U at I_{max}	≤ 2,5 V
Vibration resistance sensor	10 - 55 Hz, 1 mm
Shock resistance sensor	30 g / 11 ms
Cable length sensor	0,3 m
Protection class sensor acc. to DIN EN 61140	Class III
Mounting screw	M5 with hexagon socket
Weight	See table below

Technical data

Part No.		MO	Operational voltage DC	Voltage tolerance DC	Power consumption DC
R422002522			-	-	-
R422002521			24 V	-10% / +10%	4,4 W
R422102676			24 V	-10% / +10%	4,5 W
R422102678			24 V	-10% / +10%	4,4 W
R422002645		-	-	-	-
R422002578			-	-	-
R422002577			24 V	-10% / +10%	4,4 W
R422102677			24 V	-10% / +10%	4,5 W
R422102679			24 V	-10% / +10%	4,4 W
R422002646		-	-	-	-

Part No.	Pilot	Working pressure min./max.	Compatibility index
R422002522	Internal	3 ... 10 bar	15
R422002521	Internal	3 ... 10 bar	15
R422102676	Internal	3 ... 10 bar	15
R422102678	Internal	3 ... 10 bar	15
R422002645	Internal	3 ... 10 bar	15
R422002578	External	-0,9 ... 10 bar	15
R422002577	External	-0,9 ... 10 bar	15
R422102677	External	-0,9 ... 10 bar	15
R422102679	External	-0,9 ... 10 bar	15
R422002646	External	-0,9 ... 10 bar	15

Part No.	Electrical connection Pilot valve	basic valve with electrical connector	Weight	Fig.
R422002522	-	Basic valve without coil	0,315 kg	Fig. 1
R422002521	Plug, EN 175301-803, form A	-	0,41 kg	Fig. 1
R422102676	Plug, M12	-	0,41 kg	Fig. 2
R422102678	Plug, EN 175301-803, form A	-	0,41 kg	Fig. 1
R422002645	-	Basic valve without coil	0,315 kg	Fig. 1
R422002578	-	Basic valve without coil	0,315 kg	Fig. 1
R422002577	Plug, EN 175301-803, form A	-	0,41 kg	Fig. 1
R422102677	Plug, M12	-	0,41 kg	Fig. 2
R422102679	Plug, EN 175301-803, form A	-	0,41 kg	Fig. 1
R422002646	-	Basic valve without coil	0,315 kg	Fig. 1

Part No.	
R422002522	-
R422002521	-
R422102676	-
R422102678	1)
R422002645	-

Part No.	
R422002578	-
R422002577	-
R422102677	-
R422102679	1)
R422002646	-

The UL certification only applies to the coil, not to the valve., Nominal flow Qn at 6 bar and $\Delta p = 1$ bar

1) With UL coil

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

When the valve is not actuated, the sensor sends a signal through pin 4 of the sensor connection.

When the valve is actuated, the sensor does not send a signal through pin 4 of the sensor connection.

The valve with position detection is possible to be used in categories 3 and 4 according to ISO 13849 in order to reach a Performance Level (PL) of the control system up to PL = e.


On its own, the valve with position detection is not a safety component and is not a complete safety solution. It is designed to increase the diagnostic coverage (DC) of the control system.

For use in categories 3 to 4, additional requirements of DIN EN ISO 13849-1:2008-12 (e.g. CCF, DC, PLr, software, systematic errors) are taken into consideration by the user.

Technical information

Housing	Polyamide, Aluminum
Seals	Acrylonitrile butadiene rubber

Dimensions Fig. 2

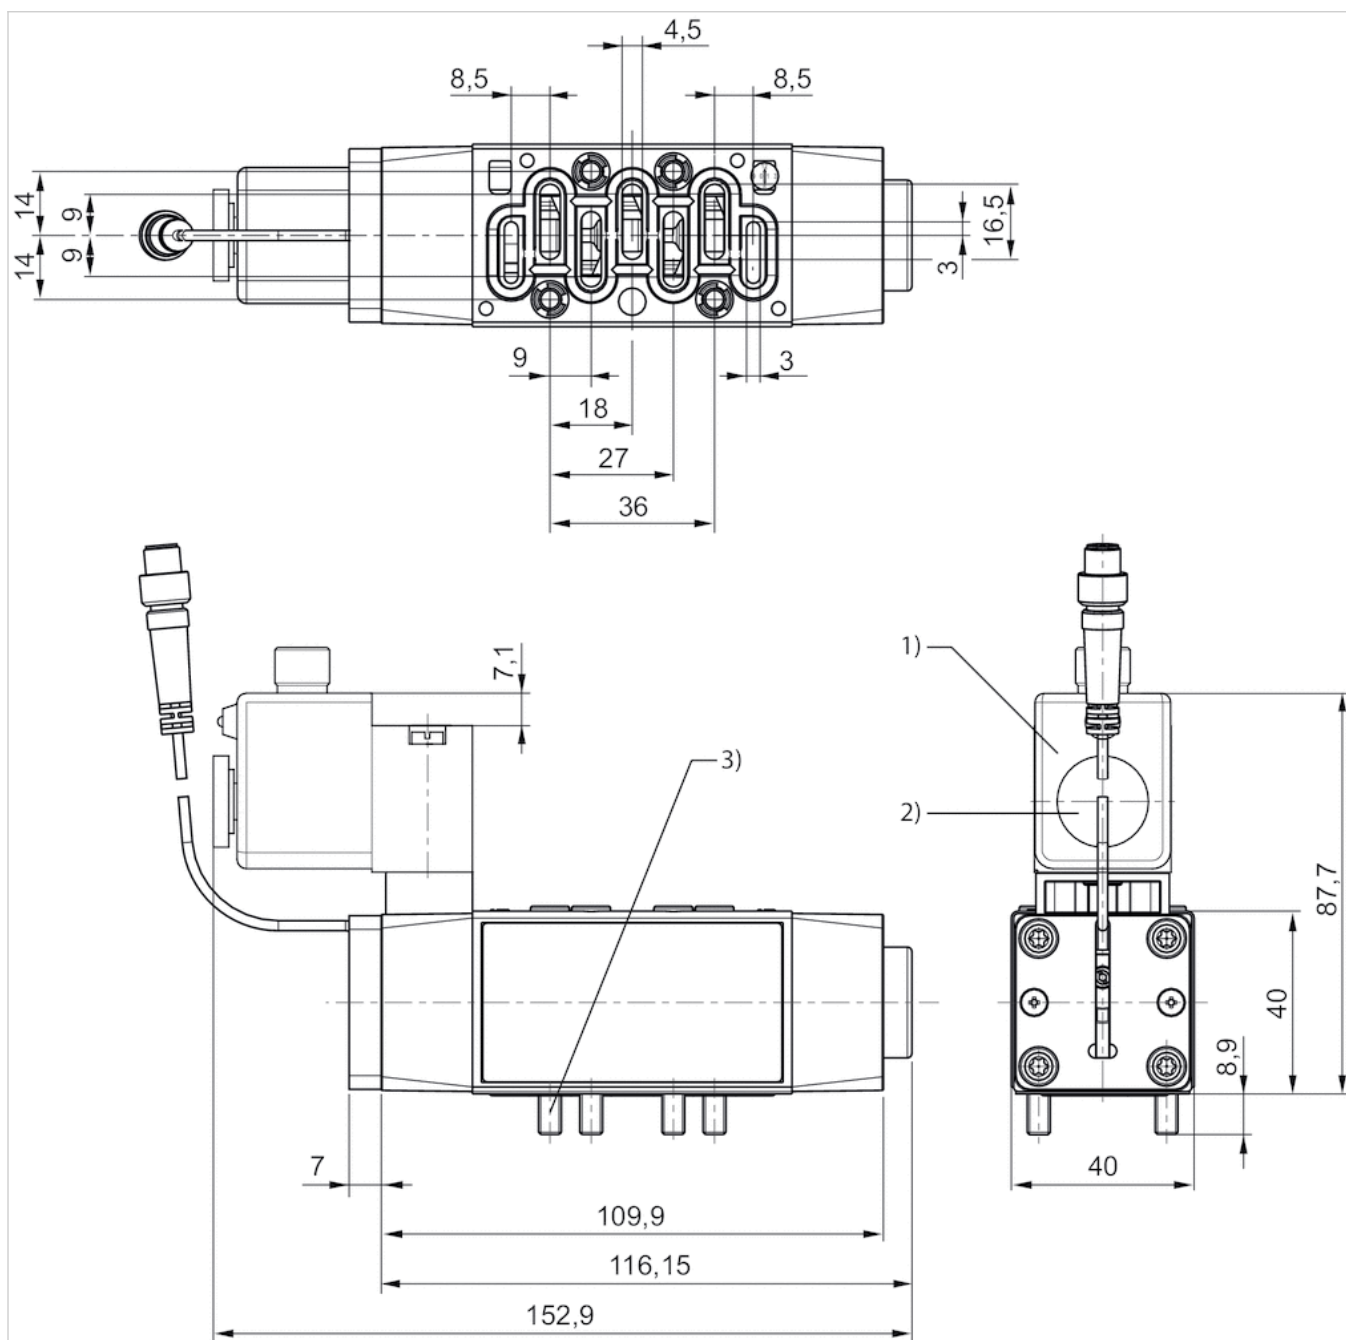


1) Adjustable coil 5x45°

2) Tightening torque for lock nut: $0.6 + 0.2 \text{ Nm}$ 3) Tightening torque for mounting screws: $2.2 \pm 0.2 \text{ Nm}$

Dimensions

Dimensions Fig. 1

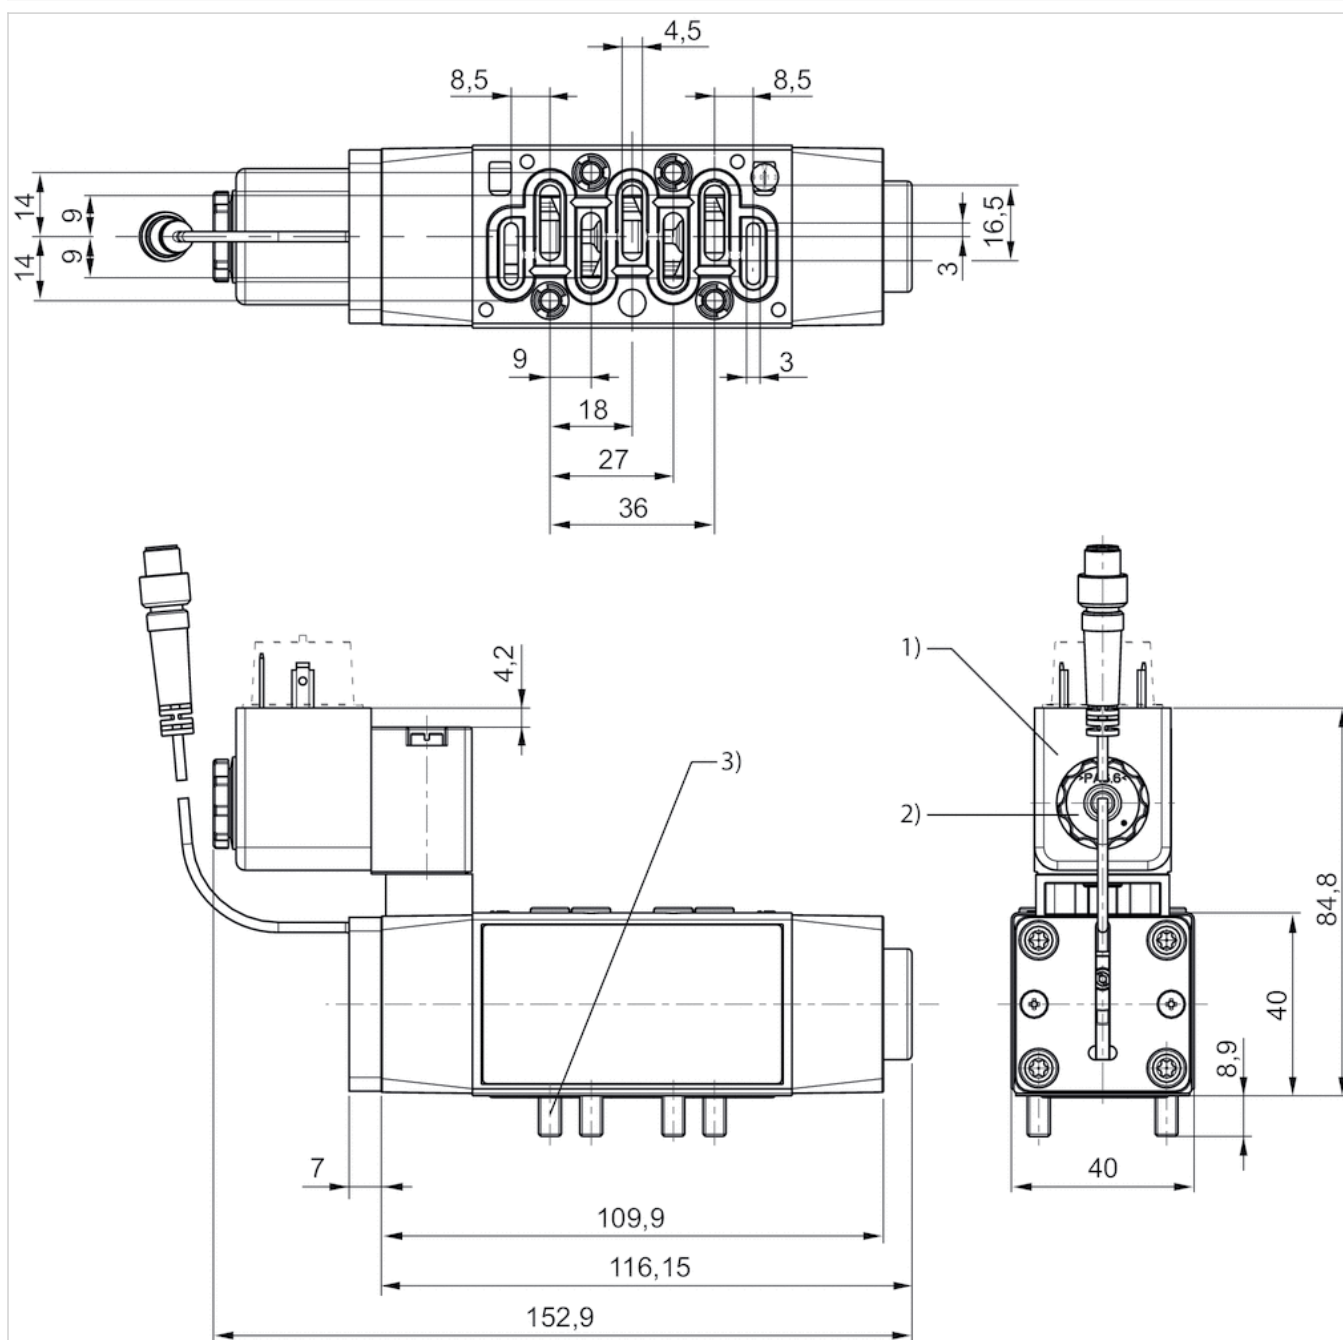


1) Adjustable coil 5x45°

2) Tightening torque for lock nut: $0.6 + 0.2 \text{ Nm}$

3) Tightening torque for mounting screws: $2.2 \pm 0.2 \text{ Nm}$

Pin assignments

PIN assignment sensor



Pin assignment: 1 = (+) 3 = (-) 4 = (OUT)

3/2-directional valve, Dual valve, IS12-PD series, size 1

- ISO 5599-1, ISO 13849-1
- ISO 1
- 2 x 5/2
- With spring return
- Compressed air connection output G 1/4
- Electrical connection Plug, M12, Plug, EN 175301-803, form A
- Manual override without detent



Version	Spool valve
Sealing principle	Soft sealing
Blocking principle	Double base plate principle
Connection type	Plate connection
Standards	ISO 5599-1, ISO 13849-1, ISO 1
Working pressure min./max.	See table below
Control pressure min./max.	3,5 ... 10 bar
Ambient temperature min./max.	0 ... 50 °C
Medium temperature min./max.	0 ... 50 °C
Medium	Compressed air
Max. particle size	5 µm
Oil content of compressed air	0 ... 0,01 mg/m³
Protection class,with connection	IP65
Compatibility index	15
Duty cycle	100 %
Typ. switch-on time	See table below
Switch-on time,max.	18 ms
Typ. switch-off time	40 ms
Switch-off time,max.	40 ms
Version sensor	electronic PNP, with LED
Sensor connection	Plug, M8, 3-pin, with knurled screw
Operating voltage sensor DC min./max.	10 ... 30 V DC
Voltage drop sensor U at I _{max}	≤ 2,5 V
Vibration resistance sensor	10 - 55 Hz, 1 mm
Shock resistance sensor	30 g / 11 ms
Cable length sensor	0,3 m
Protection class sensor acc. to DIN EN 61140	Class III
Weight	See table below

Technical data

Part No.		MO	Operational voltage DC	Voltage tolerance DC	Power consumption DC
R422003622			24 V	-10% / +10%	4,5 W
R422003623			24 V	-10% / +10%	4,5 W
R422003624			24 V	-10% / +10%	4,4 W
R422003625			24 V	-10% / +10%	4,4 W
R422003189			24 V	-10% / +10%	4,5 W
R422003190			24 V	-10% / +10%	4,5 W
R422003191			24 V	-10% / +10%	4,4 W
R422003192			24 V	-10% / +10%	4,4 W

Part No.	Pilot	Nominal flow 1 ► 2	Nominal flow 4 ► 5	Nominal flow 4ext ► 5
R422003622	External	800 l/min	1050 l/min	700 l/min
R422003623	Internal	800 l/min	1050 l/min	700 l/min
R422003624	External	800 l/min	1050 l/min	700 l/min
R422003625	Internal	800 l/min	1050 l/min	700 l/min
R422003189	External	800 l/min	1050 l/min	700 l/min
R422003190	Internal	800 l/min	1050 l/min	700 l/min
R422003191	External	800 l/min	1050 l/min	700 l/min
R422003192	Internal	800 l/min	1050 l/min	700 l/min

Part No.	Working pressure min./max.	Typ. switch-on time	Compatibility index
R422003622	1 ... 10 bar	20 ms	15
R422003623	3,5 ... 10 bar	20 ms	15
R422003624	1 ... 10 bar	20 ms	15
R422003625	3,5 ... 10 bar	20 ms	15
R422003189	1 ... 10 bar	20 ms	15
R422003190	3,5 ... 10 bar	30 ms	15
R422003191	1 ... 10 bar	20 ms	15
R422003192	3,5 ... 10 bar	30 ms	15

Part No.	Electrical connection Pilot valve	Weight	Fig.	
R422003622	Plug, M12	2,2 kg	Fig. 1	-
R422003623	Plug, M12	2,2 kg	Fig. 1	-
R422003624	Plug, EN 175301-803, form A	2,2 kg	Fig. 1	-
R422003625	Plug, EN 175301-803, form A	2,2 kg	Fig. 1	-
R422003189	Plug, M12	2,4 kg	Fig. 2	1)
R422003190	Plug, M12	2,4 kg	Fig. 2	1)
R422003191	Plug, EN 175301-803, form A	2,4 kg	Fig. 2	1)
R422003192	Plug, EN 175301-803, form A	2,4 kg	Fig. 2	1)

Nominal flow Q_n at 6 bar and Δp = 1 bar

1) Dual valve with integrated non-return valve. Guaranteed minimum opening pressure of the non-return valve is 0,3 bar., The safety function "safe venting" limited to category 1 and level PL = c.

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in the MediaCentre).

When the valve is not actuated, the sensor sends a signal through pin 4 of the sensor connection.

When the valve is actuated, the sensor does not send a signal through pin 4 of the sensor connection.

The dual valve includes two IS12-PD-5/2-SR valves with position detection and fulfills the safety function "safe venting" and "protection against unexpected start-up". The dual valve permits use in categories 3 and 4 in accordance with ISO 13849-1 to achieve a control system performance level (PL) of up to PL = e.


On its own, the valve with position detection is not a safety component and is not a complete safety solution. It is designed to increase the diagnostic coverage (DC) of the control system.

For use in categories 3 to 4, additional requirements of DIN EN ISO 13849-1:2008-12 (e.g. CCF, DC, PLr, software, systematic errors) are taken into consideration by the user.

Technical information

Housing	Polyamide, Aluminum
Seals	Acrylonitrile butadiene rubber

Dimensions Fig. 2 Dual valve with integrated non-return valve

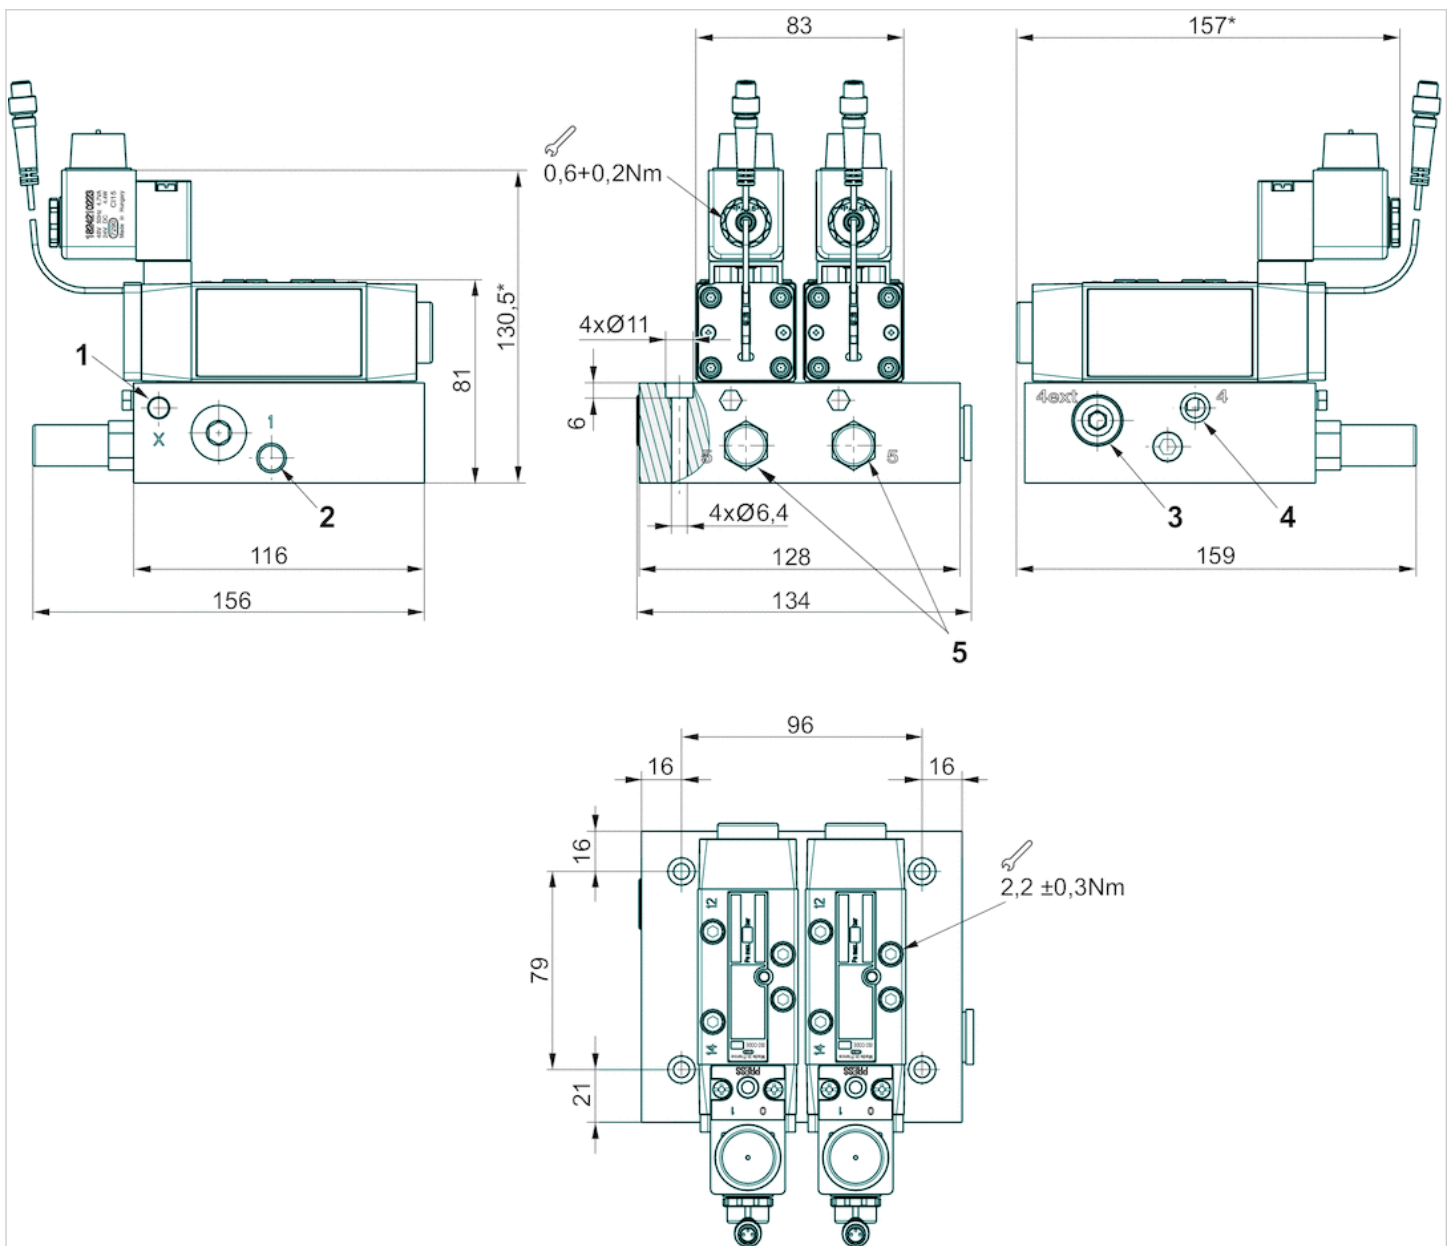


*) max.

- 1) External pilot pressure G1/8
- 2) Input pressure G1/4
- 3) Exhaust in with non-return valve G1/4
- 4) Output pressure G1/4
- 5) Exhaust G 1/4

Dimensions

Dimensions Fig. 1

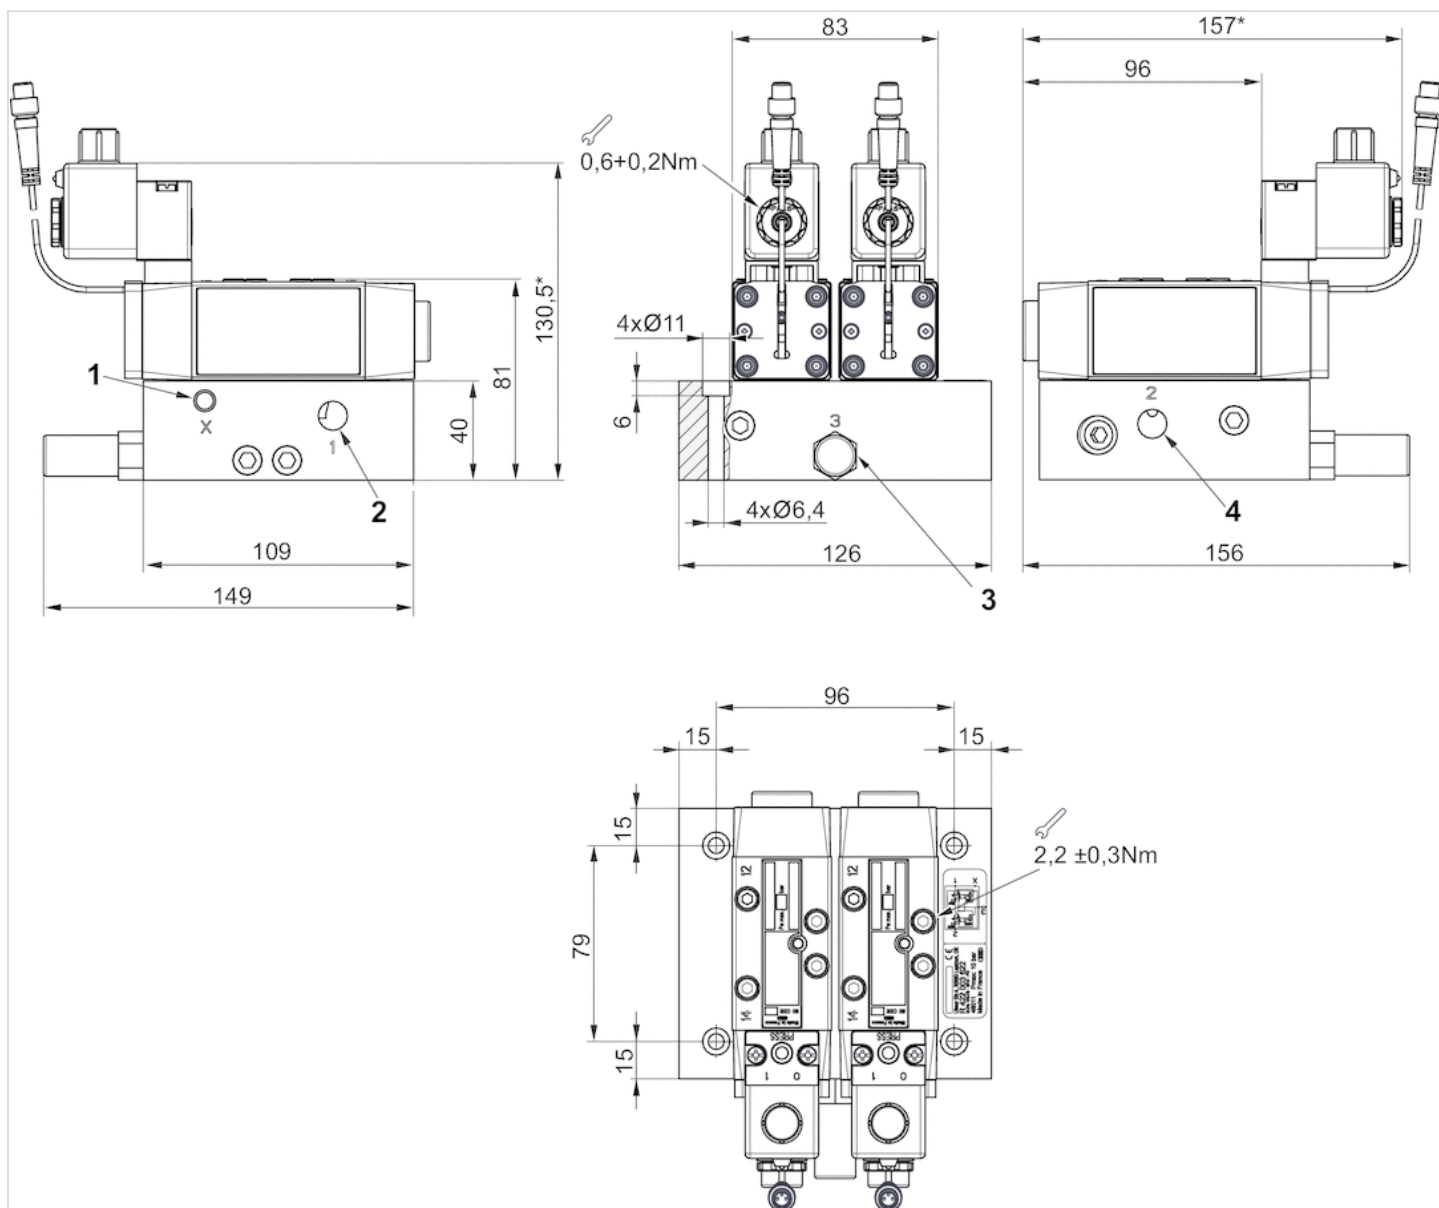


*) max.

- 1) External pilot pressure G1/8
- 2) Input pressure G1/4
- 3) Exhaust G 1/4
- 4) Output pressure G1/4

Pin assignments

PIN assignment sensor



Pin assignment: 1 = (+) 3 = (-) 4 = (OUT)

Single subbase, thread connections on the side

- standard ISO 5599-1
- Frame size ISO 1
- Compressed air connection output G 1/4
- Reversed pressure supply permissible



Standards	ISO 5599-1
Working pressure min./max.	-0,95 ... 16 bar
Ambient temperature min./max.	-25 ... 70 °C
Medium temperature min./max.	-25 ... 70 °C
Medium	Compressed air
Number of valve positions,max.	1
Grid dimension	48 mm
Direction of pneumatic port (1)	On the side
Direction of pneumatic port (3,5)	On the side
Direction of pneumatic port (2,4)	On the side
Direction of pneumatic port (12)	On the side
Direction of pneumatic port (14)	On the side
Exhaust (3,5)	With directional exhaust (3/5)
Exhaust type	Ports separated
Weight	0,17 kg

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Output [2 / 4]
1825503143	G 1/4	G 1/4

Part No.	Compressed air connection Exhaust [3 / 5]	Compressed air connection Pilot connection [X]
1825503143	G 1/4	G 1/8

Part No.	Compressed air connection Pilot control exhaust [R]
1825503143	G 1/8

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

For use with HV series valves, the ambient temperature is - 25 °C ... 200 °C and the medium temperature is - 25 °C ... 120 °C .
Reversed pressure supply is not permitted for HV series valves.


Technical information

Material

Base plate	Die-cast aluminum
------------	-------------------

Dimensions

Fig. 1

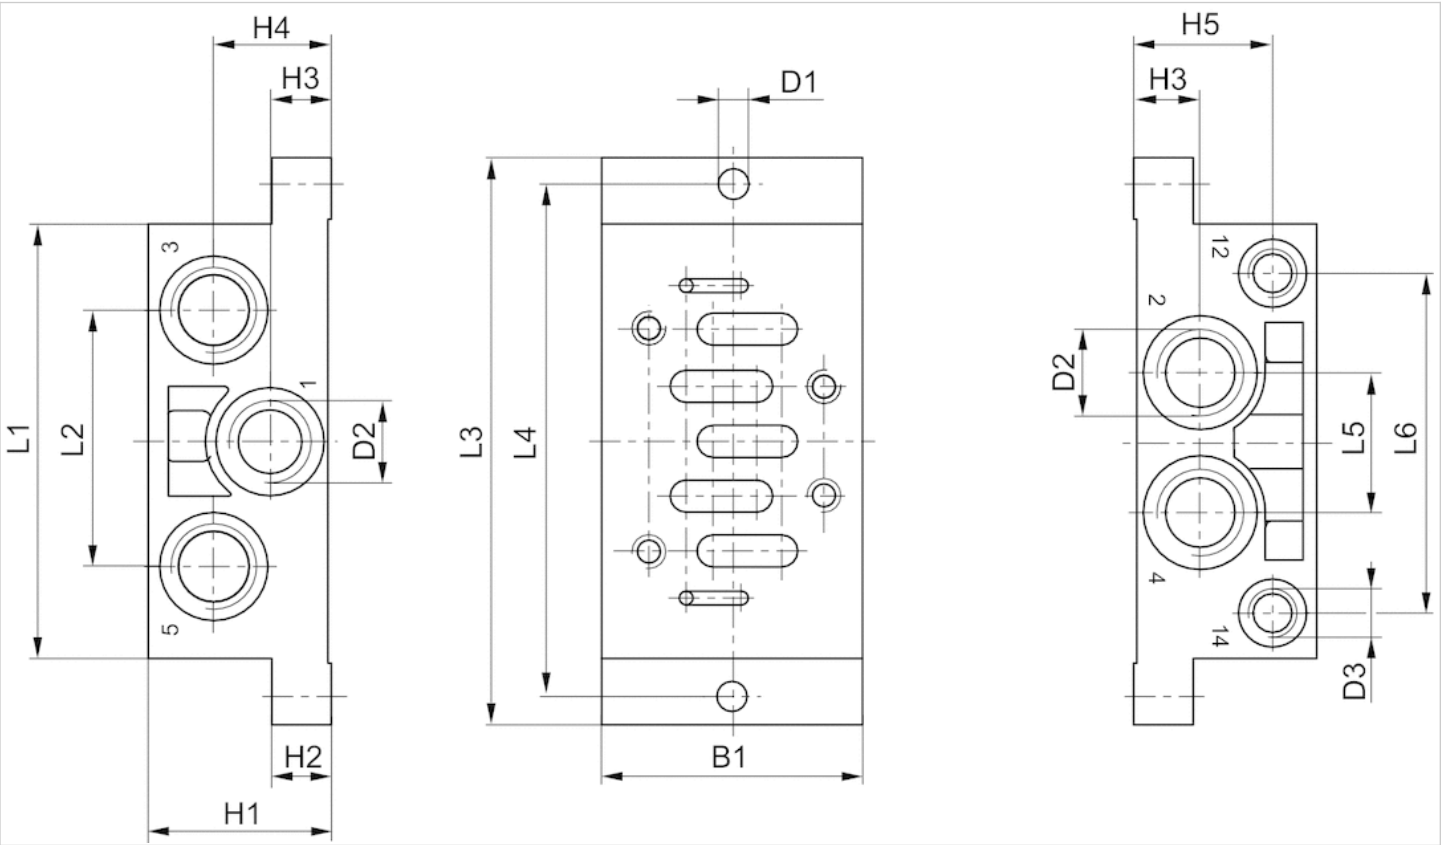

Dimensions

Part No.	Frame size	B1	H1	H2	H3	H4	H5	D1	D2 *)	D3 *)	L1	L2	L3	L4	L5	L6
1825503143	ISO 1	48	32	10	11,5	21.5	23.5	5.5	G 1/4	G 1/8	84	43	110	98	24	58

*) Ports

Single subbase, thread connections on the bottom

- standard ISO 5599-1
- Frame size ISO 1
- Compressed air connection output G 1/4
- Reversed pressure supply permissible



Standards	ISO 5599-1
Working pressure min./max.	-0,95 ... 16 bar
Ambient temperature min./max.	-25 ... 70 °C
Medium temperature min./max.	-25 ... 70 °C
Medium	Compressed air
Number of valve positions,max.	1
Direction of pneumatic port (1)	Down
Direction of pneumatic port (3,5)	Down
Direction of pneumatic port (2,4)	Down
Direction of pneumatic port (12)	Down
Direction of pneumatic port (14)	Down
Exhaust (3,5)	With directional exhaust (3/5)
Exhaust type	Ports separated
Weight	0,196 kg

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Output [2 / 4]
1825503201	G 1/4	G 1/4

Part No.	Compressed air connection Exhaust [3 / 5]	Compressed air connection Pilot connection [X]
1825503201	G 1/4	G 1/8

Part No.	Compressed air connection Pilot control exhaust [R]
1825503201	G 1/8

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

For use with HV series valves, the ambient temperature is - 25 °C ... 200 °C and the medium temperature is - 25 °C ... 120 °C .
 Reversed pressure supply is not permitted for HV series valves.


Technical information

Material

Base plate	Die-cast aluminum
------------	-------------------

Dimensions

Dimensions

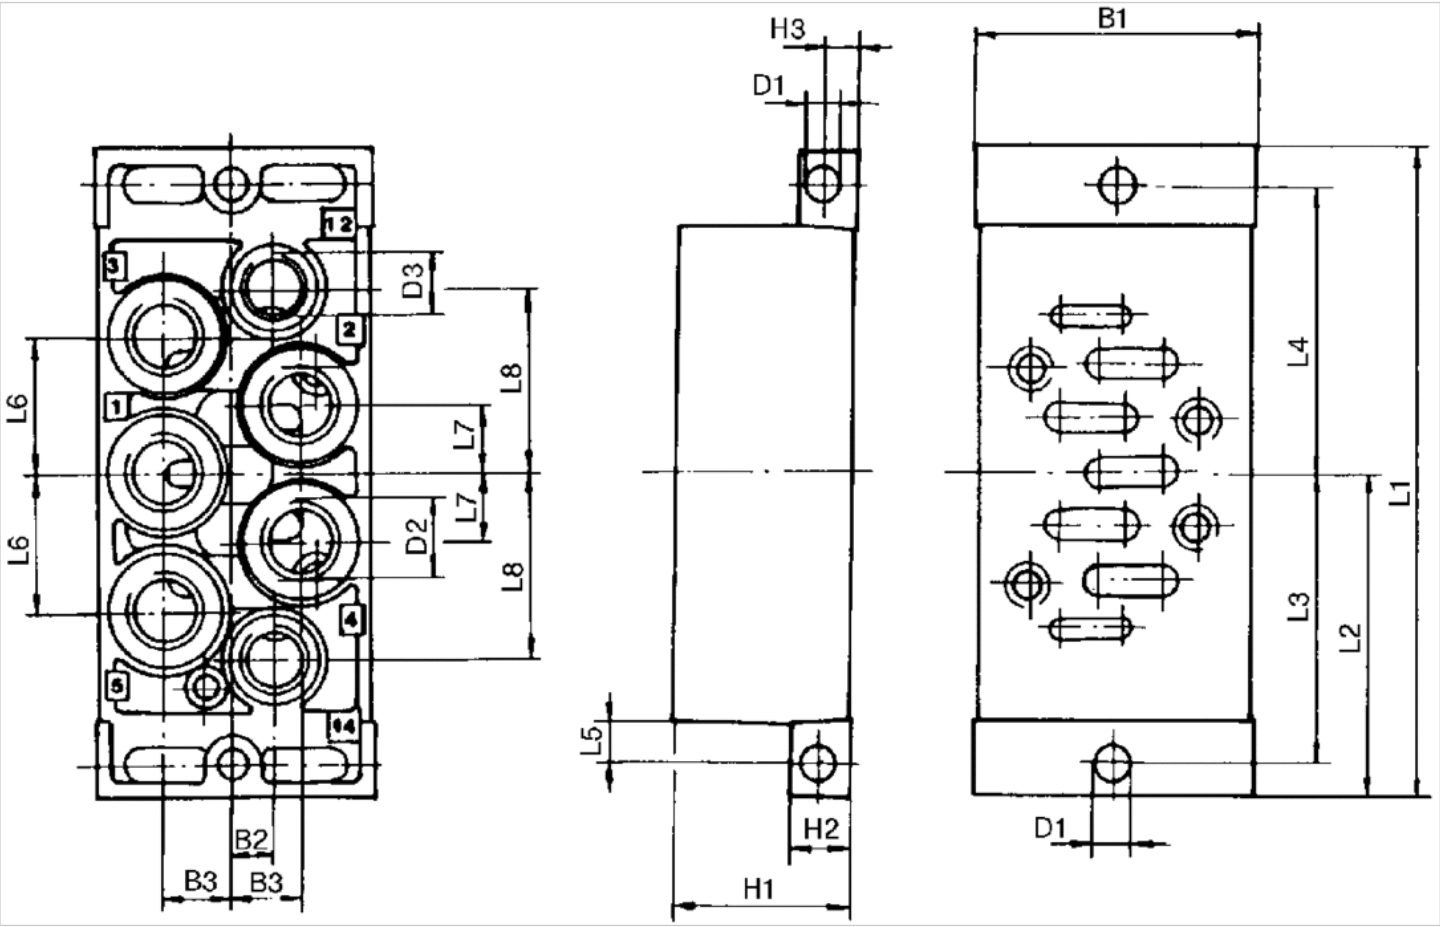

Dimensions

Part No.	Frame size	B1	B2	B3	D1	D2 *)	D3 *)	H1	H2	H3	L1	L2	L3	L4	L5	L6	L7	L8
1825503201	ISO 1	46	7	11.5	5.5	G 1/4	G 1/8	30	10	5	110	55	49	49	7	23	11,5	31

*) Ports

Single subbase, ports on side

- standard ISO 5599-1
- Frame size ISO 1
- Compressed air connection output G 1/8, G 1/4



Standards	ISO 5599-1
Working pressure min./max.	-1 ... 16 bar
Ambient temperature min./max.	-20 ... 70 °C
Medium temperature min./max.	-20 ... 70 °C
Medium	Compressed air
Number of valve positions,max.	1
Direction of pneumatic port (1)	On the side
Direction of pneumatic port (3,5)	On the side
Direction of pneumatic port (2,4)	On the side
Direction of pneumatic port (14)	On the side
Exhaust (3,5)	With directional exhaust (3/5)
Exhaust type	Ports separated
Weight	See table below

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Output [2 / 4]
5801710000	G 1/8	G 1/8
5801740000	G 1/4	G 1/4

Part No.	Compressed air connection Exhaust [3 / 5]	Compressed air connection Pilot connection [X]	Weight
5801710000	G 1/8	G 1/8	0,11 kg
5801740000	G 1/4	G 1/8	0,17 kg

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Die-cast aluminum, black painted

Dimensions

Dimensions

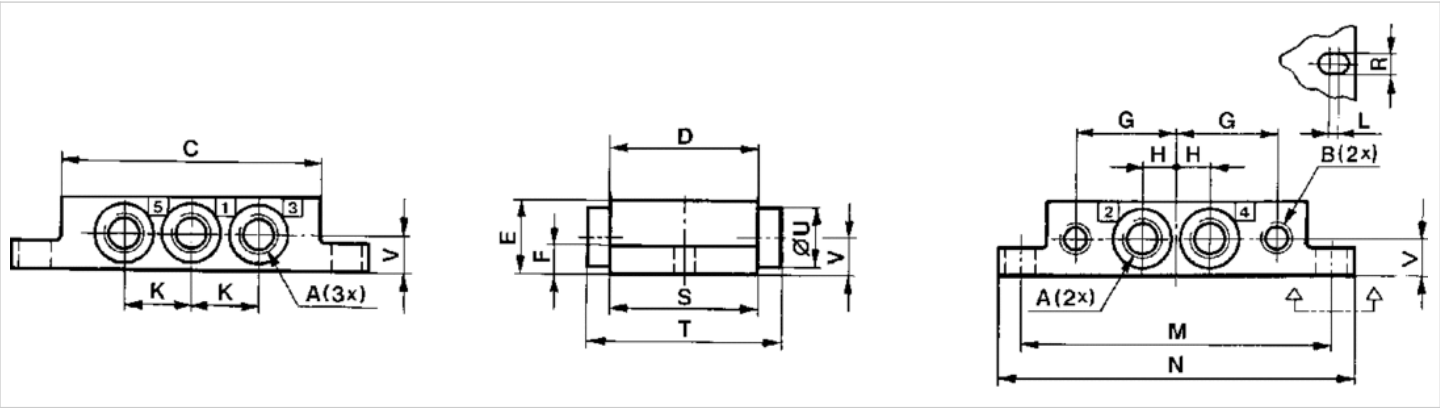

Dimensions

Part No.	Frame size	A *)	B *)	C	D	E	F	G	H	K	L	M	N	R	S	T	U	V
5801710000	ISO 1	G 1/8	G 1/8	70	40	20	8	26.5	9	18	2	84	96	5.4	40	–	–	10
5801740000	ISO 1	G 1/4	G 1/8	70	40	23	11	31.5	11.5	23	2	96	110	5.4	46	64	21	12

*) Ports

Single subbase, ports on bottom

- standard ISO 5599-1
- Frame size ISO 1
- Compressed air connection output G 1/8



Standards	ISO 5599-1
Working pressure min./max.	-1 ... 16 bar
Ambient temperature min./max.	-20 ... 70 °C
Medium temperature min./max.	-20 ... 70 °C
Medium	Compressed air
Number of valve positions,max.	1
Direction of pneumatic port (1)	Down
Direction of pneumatic port (3,5)	Down
Direction of pneumatic port (2,4)	Down
Direction of pneumatic port (14)	Down
Exhaust (3,5)	uncollected exhaust
Exhaust type	Ports separated
Weight	0,11 kg

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Output [2 / 4]
5801700000	G 1/8	G 1/8

Part No.	Compressed air connection Exhaust [3 / 5]	Compressed air connection Pilot connection [X]
5801700000	G 1/8	G 1/8

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Die-cast aluminum, black painted

Dimensions

Dimensions

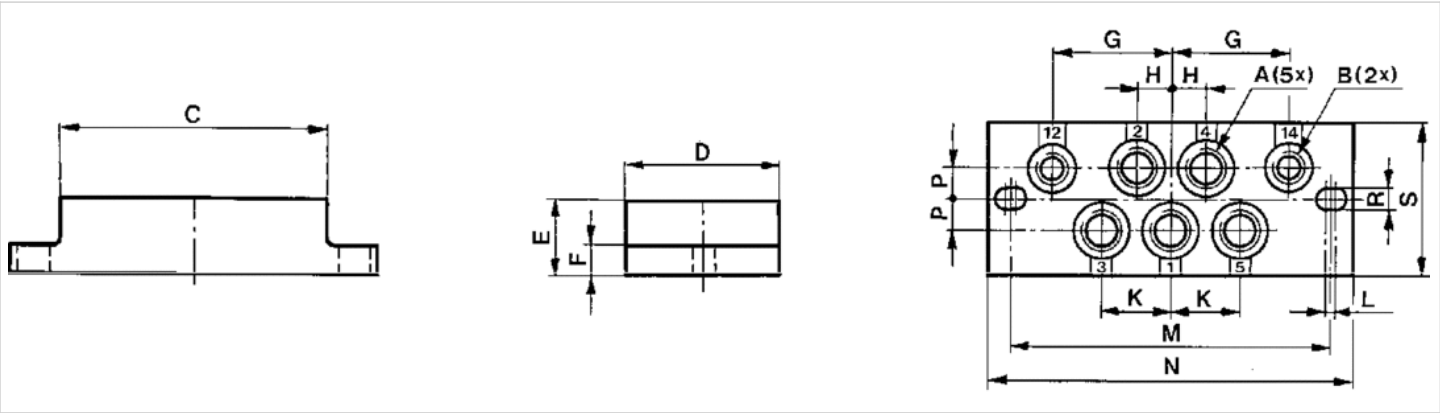

Dimensions

Part No.	Frame size	A *)	B *)	C	D	E	F	G	H	K	L	M	N	P	R	S
5801700000	ISO 1	G1/8	G1/8	70	40	20	8	26.5	9	18	2	84	96	8	5.4	40

*) Ports

Transition plate

- standard ISO 5599-1
- Frame size ISO 1 ► ISO 2
- type F
- Can be assembled into blocks
- Reversed pressure supply permissible



Standards	ISO 5599-1
Working pressure min./max.	-0,95 ... 16 bar
Ambient temperature min./max.	-15 ... 70 °C
Medium temperature min./max.	-15 ... 80 °C
Medium	Compressed air
Exhaust (3,5)	uncollected exhaust
Exhaust type	Ports separated
Mounting screw	hexagon head
Weight	0,295 kg

Technical data

Part No.

1825503164

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .


The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information


Material	
Housing	Aluminum
Base plate	Aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

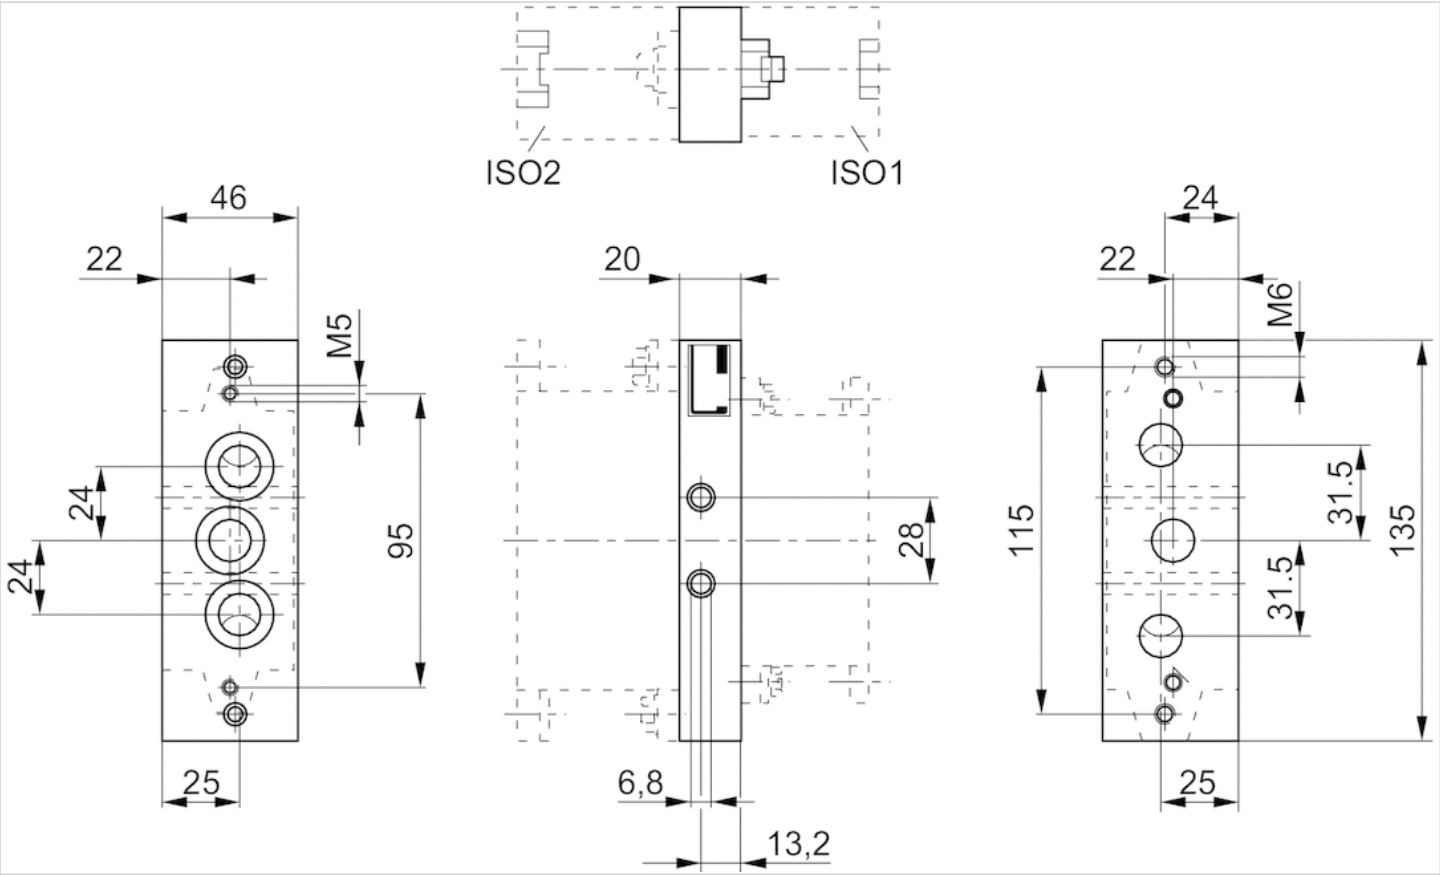

End plate left, End plate right

- standard ISO 5599-1
- Frame size ISO 1
- type F
- Can be assembled into blocks
- Base plate principle, multiple
- Reversed pressure supply permissible

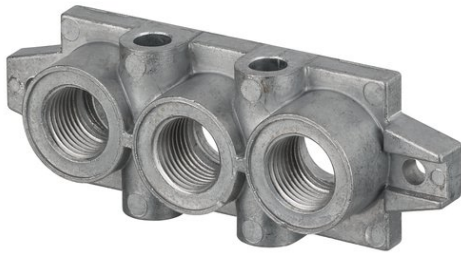

Standards

Compressed air connection
Working pressure min./max.
Ambient temperature min./max.
Medium temperature min./max.
Medium
Direction of pneumatic port (1)
Direction of pneumatic port (3,5)
Exhaust (3,5)
Exhaust type
Mounting screw
Weight

ISO 5599-1

according to ISO 5599-1
-0,95 ... 16 bar
-15 ... 70 °C
-25 ... 70 °C
Compressed air
On the side
On the side
With directional exhaust (3/5)
Ports separated
hexagon head
0,208 kg

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Exhaust [3 / 5]
1825503145	G 3/8	G 3/8

Scope of delivery: 2 end plates including seal and mounting screws

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Die-cast aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

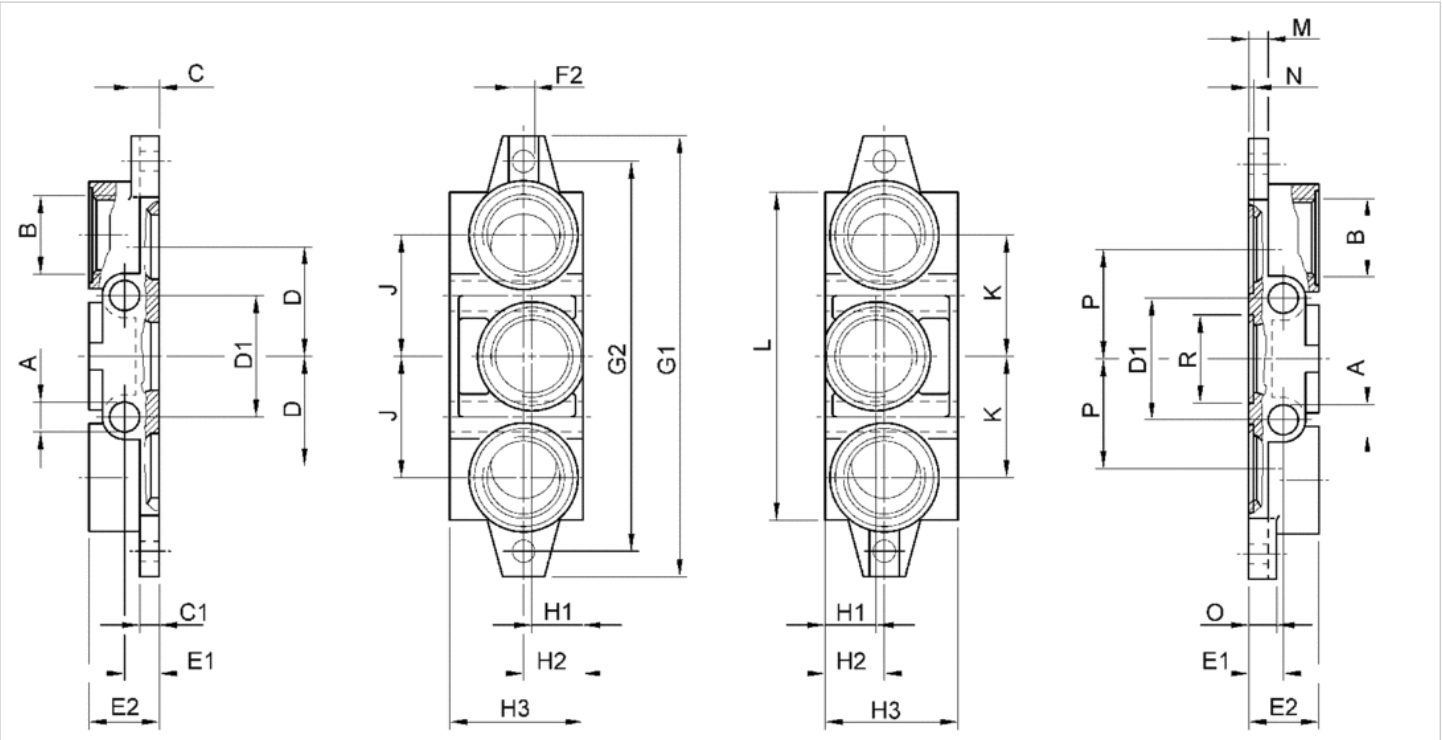

Dimensions

Part No.	A	B	C	C1	D	D1	E1	E2	F2	G1	G2	H1	H2	H3	J	K	L	M	N	O	P	R
1825503145	7	G 3/8	8	6	24	28	11	22	Ø 5,5	110	95	22	22	46	28	28	85	6	2	8	24	Ø 22,1

End plates for adapter plate

- standard ISO 5599-1
- Frame size ISO 1, ISO 2
- type F
- Can be assembled into blocks
- Reversed pressure supply permissible



Standards	ISO 5599-1
Working pressure min./max.	-0,95 ... 16 bar
Ambient temperature min./max.	-15 ... 70 °C
Medium temperature min./max.	-15 ... 80 °C
Medium	Compressed air
Direction of pneumatic port (1)	On the side
Direction of pneumatic port (3,5)	On the side
Exhaust (3,5)	With directional exhaust (3/5)
Exhaust type	Ports separated
Mounting screw	hexagon head
Weight	0,255 kg

Technical data

Part No.

1825503244

Scope of delivery: 2 end plates of different sizes including seal and mounting screws

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information


Material

Base plate	Die-cast aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

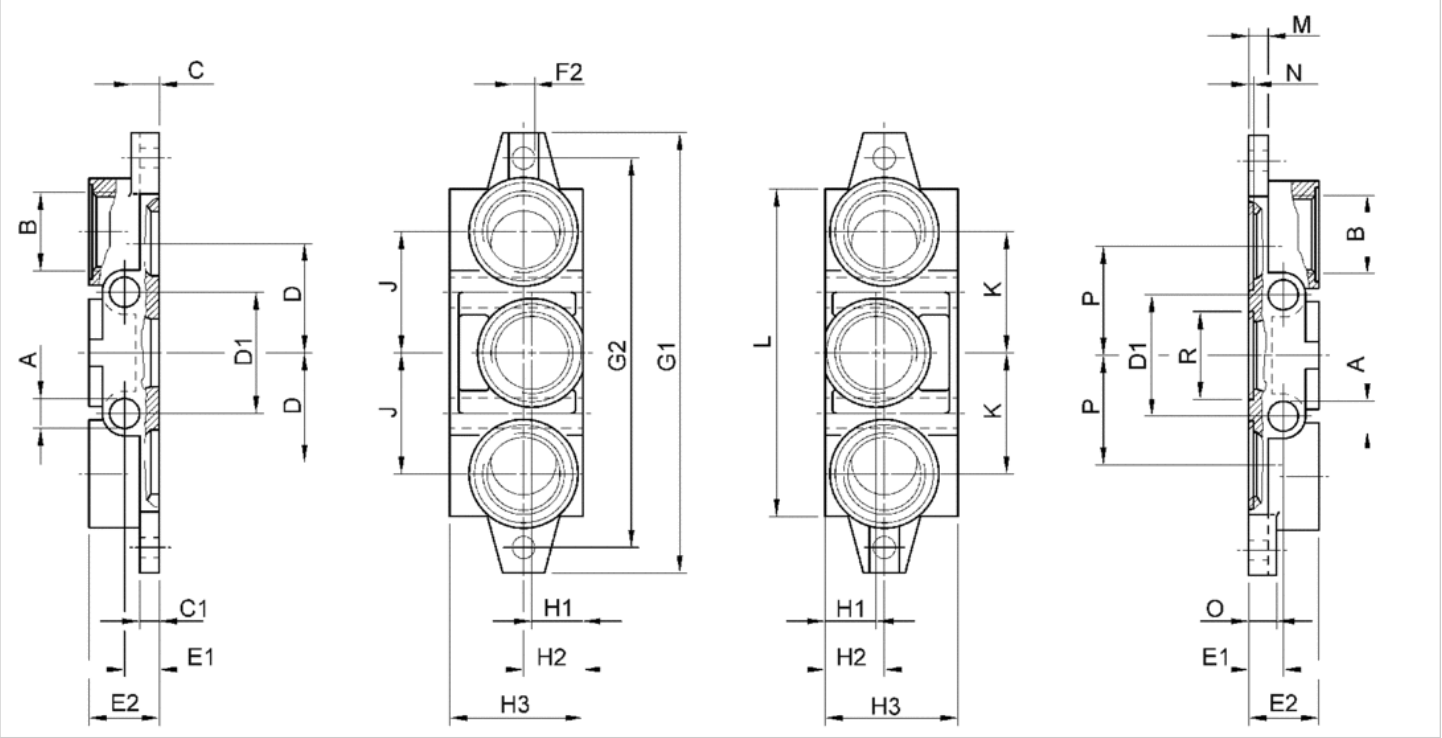

Dimensions

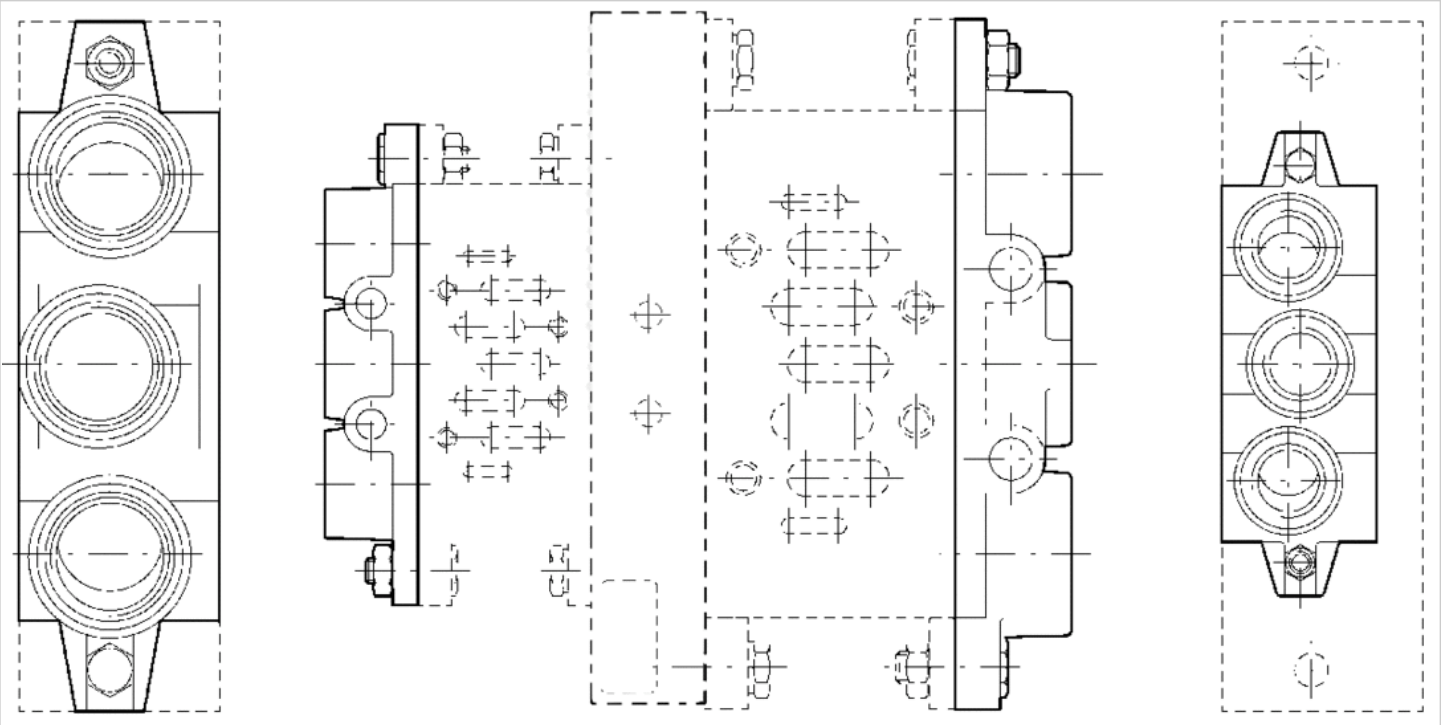

Dimensions

	ISO 1	ISO 2	ISO 3
A	7	9	12
B	G 3/8	G 1/2	G 1

	ISO 1	ISO 2	ISO 3
C	8	11	12
C1	6	8	8
D	24	31,5	47
D1	28	35	52
E1	11	13	15
E2	22	26	32
F2	Ø 5,5	Ø 6,6	Ø 9
G1	110	135	190
G2	95	115	168
H1	22	23	22
H2	22	24	25
H3	46	47	56
J	28	34	52
K	28	34	52
L	85	100	140
M	6	8	8
N	2	2	2,7
O	8	11	12
P	24	31,5	47
R	Ø 22,1	Ø 28,7	Ø 38

Angle subplate

- standard ISO 5599-1
- Frame size ISO 1
- type F
- Compressed air connection output G 1/4



Standards	ISO 5599-1
Working pressure min./max.	0 ... 10 bar
Ambient temperature min./max.	-15 ... 80 °C
Medium temperature min./max.	-15 ... 80 °C
Medium	Compressed air
Direction of pneumatic port (2,4)	On the side
Mounting screw	with hexagon socket
Weight	0,413 kg

Technical data

Part No.	Compressed air connection Output [2 / 4]
1825503170	G 1/4

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

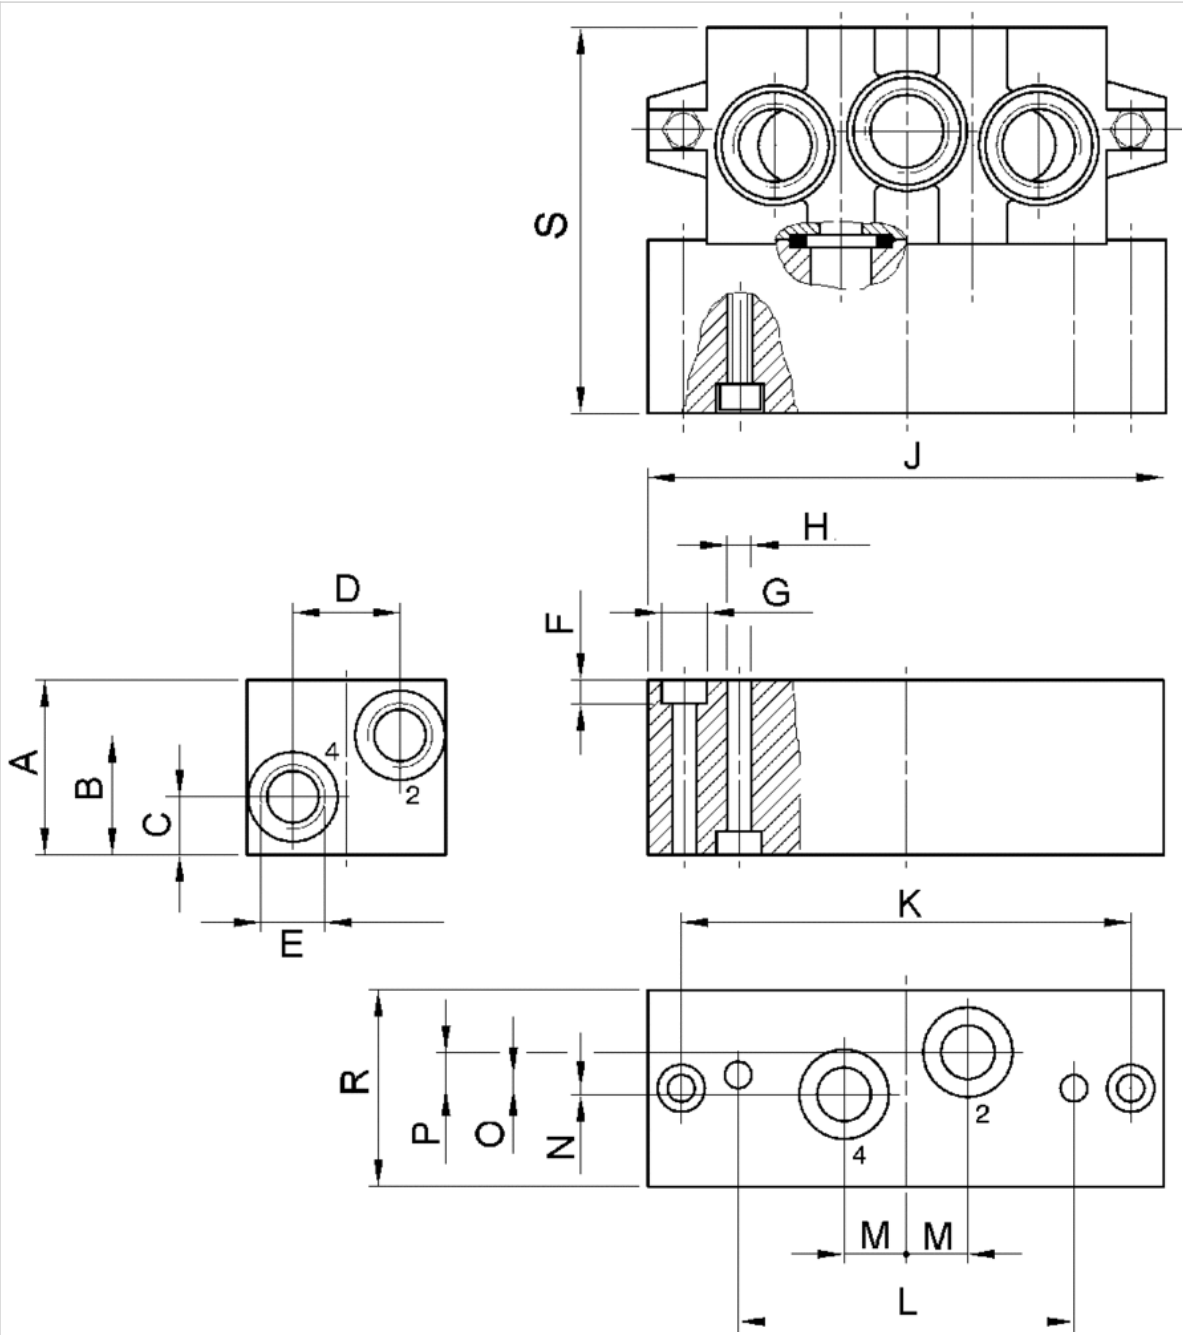

Dimensions

Part No.	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	R	S
1825503170	37	25	12	22	G 1/4	5,7	Ø 10	Ø 5,5	110	95	71	13	1,5	3	7,5	42	81

Supply plate

- standard ISO 5599-1
- Frame size ISO 1
- type F
- Reversed pressure supply permissible



Standards	ISO 5599-1
Working pressure min./max.	-0,95 ... 16 bar
Ambient temperature min./max.	-25 ... 70 °C
Medium temperature min./max.	-25 ... 70 °C
Medium	Compressed air
Direction of pneumatic port (1)	Down
Direction of pneumatic port (3,5)	Down
Exhaust type	Ports separated
Mounting screw	hexagon head
Weight	0,395 kg

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Exhaust [3 / 5]
8985041162	G 3/8	G 3/8

Scope of delivery incl. seal and mounting screws

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

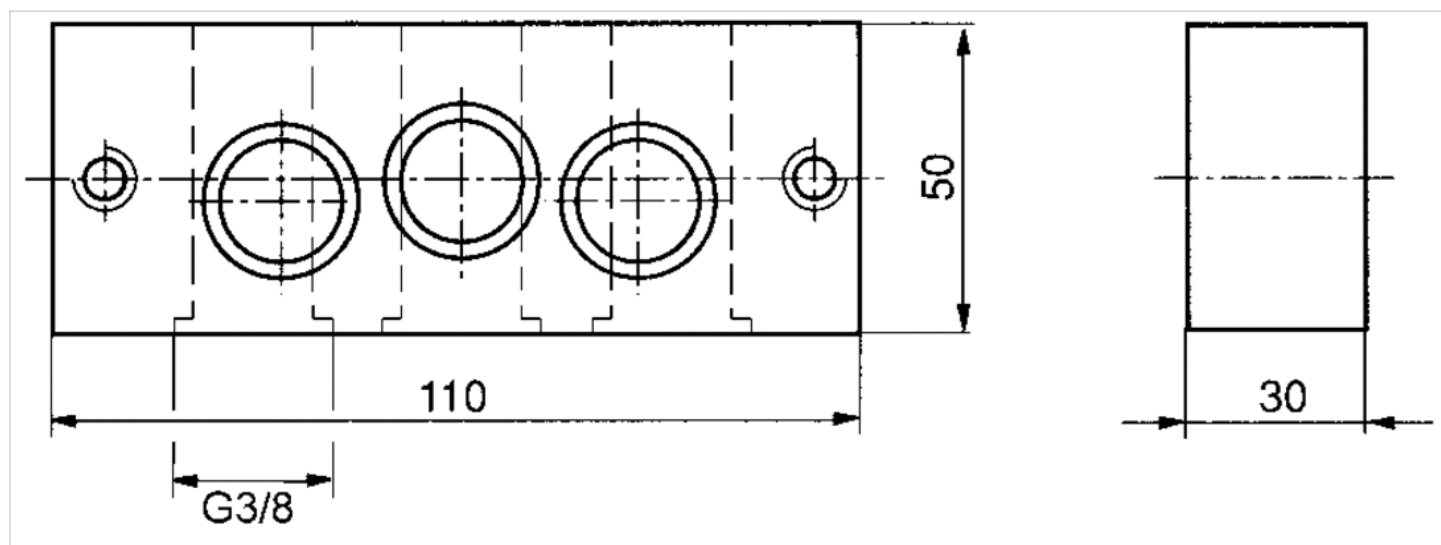

Blanking piece, Subbases ISO 5599-1

- standard ISO 5599-1, ISO 1, ISO 5599-1, ISO 2, ISO 5599-1, ISO 3
- type F



Standards	ISO 5599-1
Working pressure min./max.	-0,95 ... 10 bar
Ambient temperature min./max.	-25 ... 70 °C

Technical data


Part No.	Accessory type	Frame size
8985049012	type F	ISO 1
8985049022	type F	ISO 2
8985049032	type F	ISO 3

Technical information

Material	
Housing	Brass
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

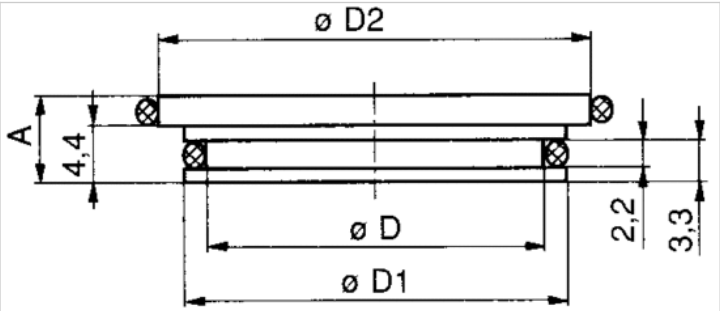

Dimensions

Part No.	Frame size	A	D	D1	D2
8985049012	ISO 1	6.2	12.2	14.8	16.5
8985049022	ISO 2	6.2	15.7	18.3	23
8985049032	ISO 3	6.9	25.1	27.7	30

Accessories, for intermediate plates

- standard ISO 5599-1, ISO 1
- type F



Standards

ISO 5599-1

Technical data

Part No.	Type	Accessory type	Frame size	Delivery unit
1827009767	Mounting screw	type F	ISO 1	10 piece
R412000918	O-ring, Ø 17 mm, 12x2,62	type F	ISO 1	50 piece

End plate right

- standard ISO 5599-1
- Frame size ISO 1, ISO 2, ISO 3
- type C



Standards	ISO 5599-1
Working pressure min./max.	-0,95 ... 16 bar
Ambient temperature min./max.	-15 ... 70 °C
Medium temperature min./max.	-15 ... 70 °C
Medium	Compressed air
Weight	See table below

Technical data

Part No.	Frame size	Compressed air connection Input [1]	Compressed air connection Exhaust [3 / 5]	Weight
R432037651	ISO 1	G 3/8	G 3/8	0,32 kg
R432037653	ISO 2	G 3/4	G 3/4	0,491 kg
R432037655	ISO 3	G 1	G 1	1,315 kg

Scope of delivery incl. seal and mounting screws

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Surface	painted
Base plate	Die-cast aluminum, black painted
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

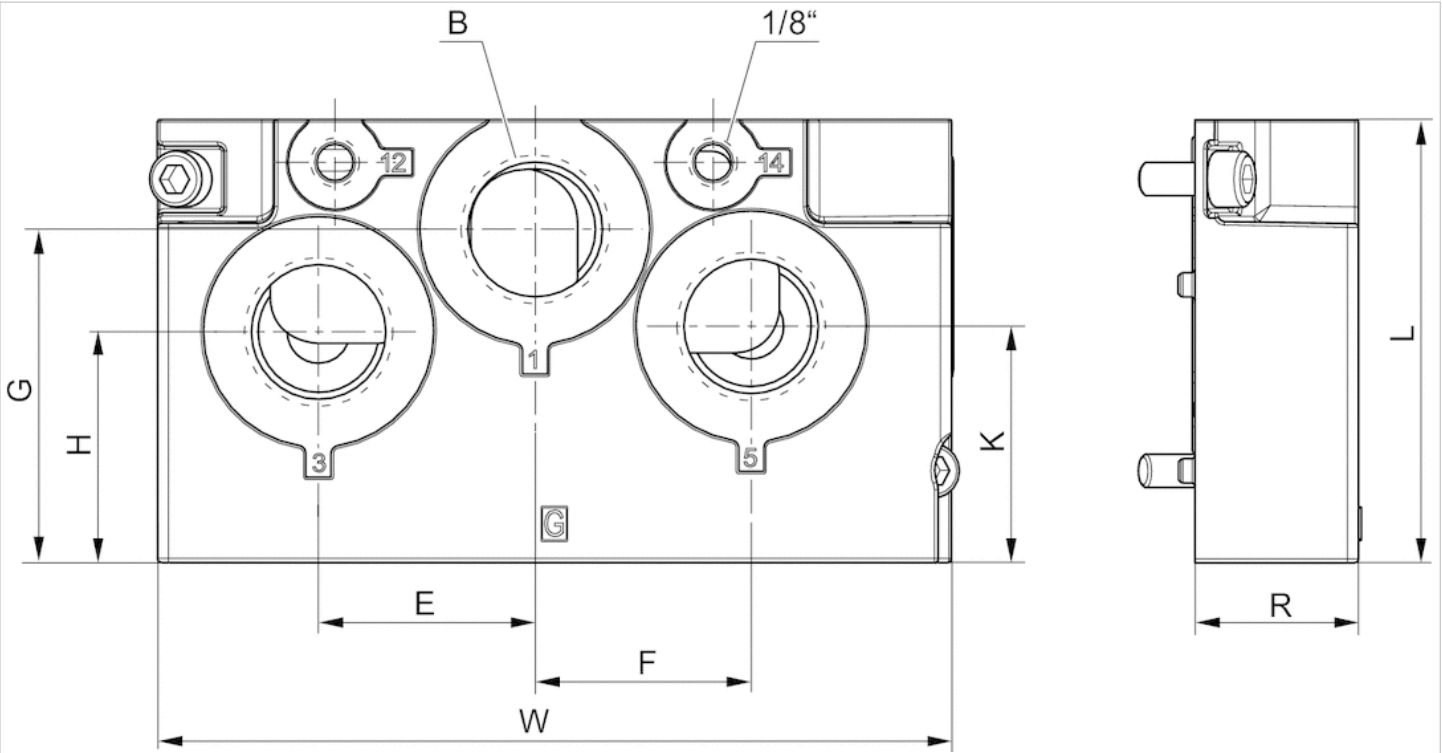

Dimensions

Part No.	Frame size	B	E	F	G	H	J	K	R	L	W
R432037651	ISO 1	3/8	23	18	15.5	30	20	37.5	25	60.6	135
R432037653	ISO 2	3/4	39	39	60	41.5	38	42.5	29.5	79.7	143
R432037655	ISO 3	1	49	49	76	53	32	53	36	100	164

Base plate

- standard ISO 5599-1
- Frame size ISO 1, ISO 2, ISO 3
- type C
- Compressed air connection output G 3/8, G 1/2, G 3/4
- Can be assembled into blocks



Standards	ISO 5599-1
Working pressure min./max.	-1 ... 16 bar
Ambient temperature min./max.	-20 ... 70 °C
Medium temperature min./max.	-20 ... 70 °C
Medium	Compressed air
Direction of pneumatic port (1)	Both directions possible
Direction of pneumatic port (3,5)	Both directions possible
Exhaust type	Ports separated
Weight	See table below

Technical data

Part No.	Frame size	Compressed air connection Output [2 / 4]	Weight
R432037639	ISO 1	G 3/8	0,592 kg
R432037641	ISO 2	G 1/2	1,039 kg
R432037643	ISO 3	G 3/4	1,885 kg

Scope of delivery incl. seal and mounting screws

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Surface	painted
Base plate	Die-cast aluminum, black painted
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

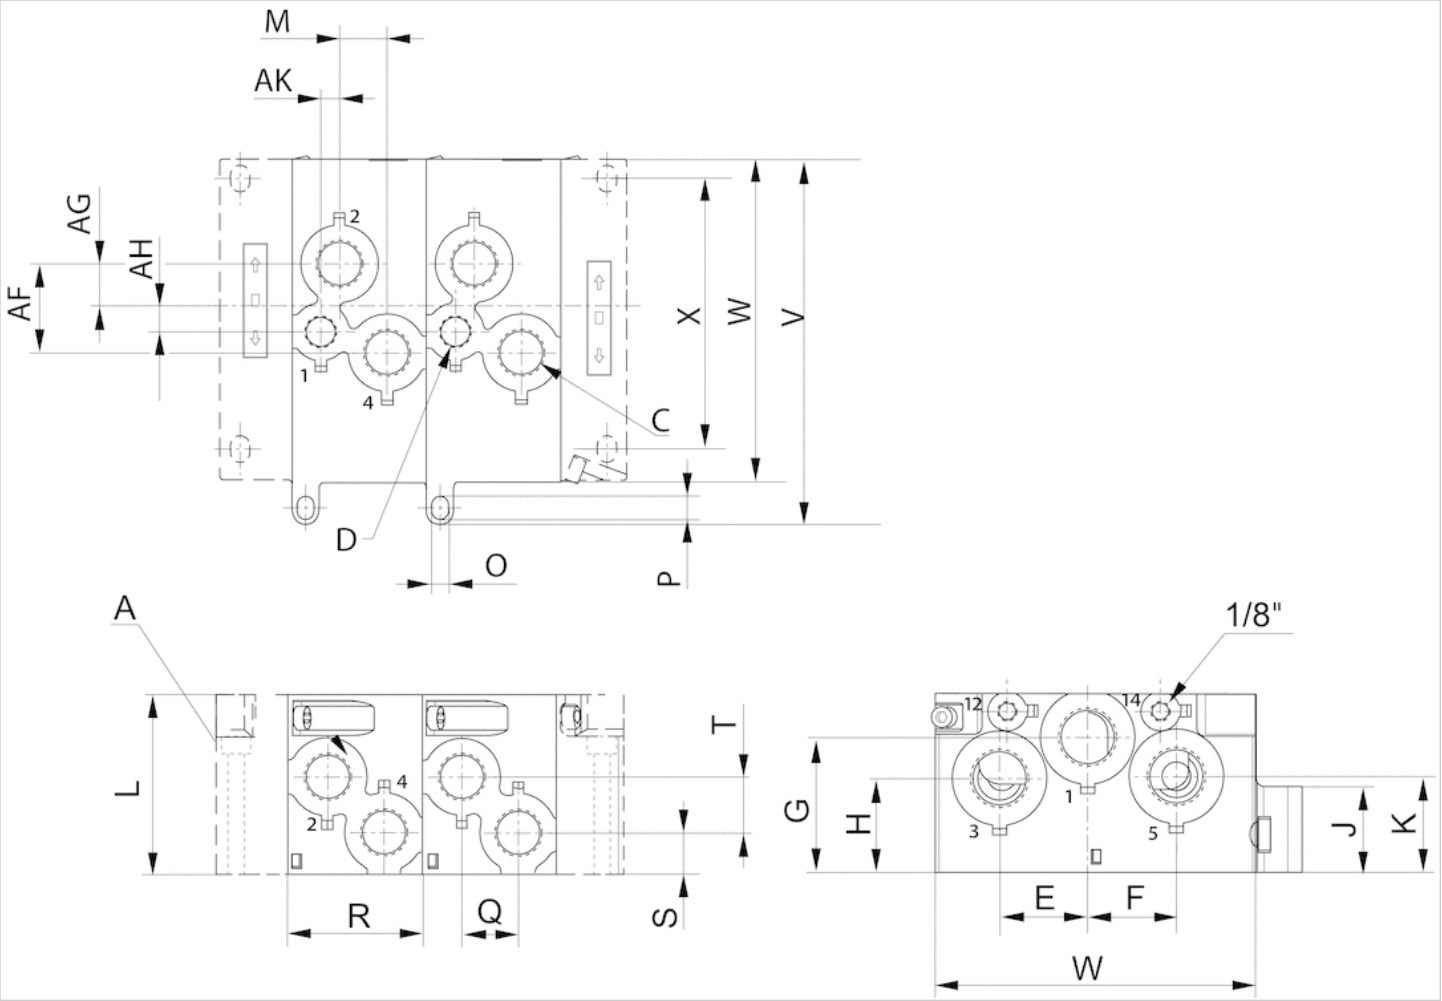

Dimensions

Part No.	A	D	C	AF	AG	AH	AK	E	F	G	H	J	K	L	M	O	P	R
R432037639	G 1/4	-	G 3/8	23.8	11.8	-	-	23	18	15,5	30	20	37,5	60.6	12	5.5	8.5	45
R432037641	G 1/2	G 3/8	G 1/2	39.5	19	11	8.2	39	39	60	41,5	38	42,5	79.7	21	5.5	9.3	59.5
R432037643	G 3/4	G 1/2	G 3/4	46.3	25.1	11.2	15.8	49	49	76	53	32	53	100	22.5	6.3	9.3	80

Q	S	T	X	W	V
18	13.3	14.7	102,5	135	150
25	18	24.8	119,6	143	162,5
38	24.5	20.5	99	164	183

End plate left

- standard ISO 5599-1
- Frame size ISO 1, ISO 2, ISO 3
- type C



Standards	ISO 5599-1
Working pressure min./max.	-0,95 ... 16 bar
Ambient temperature min./max.	-15 ... 70 °C
Medium temperature min./max.	-15 ... 70 °C
Medium	Compressed air
Weight	See table below

Technical data

Part No.	Frame size	Compressed air connection Input [1]	Compressed air connection Exhaust [3 / 5]	Weight
R432037645	ISO 1	G 3/8	G 3/8	0,309 kg
R432037647	ISO 2	G 3/4	G 3/4	0,509 kg
R432037649	ISO 3	G 1	G 1	1,313 kg

Scope of delivery incl. seal and mounting screws


Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Die-cast aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

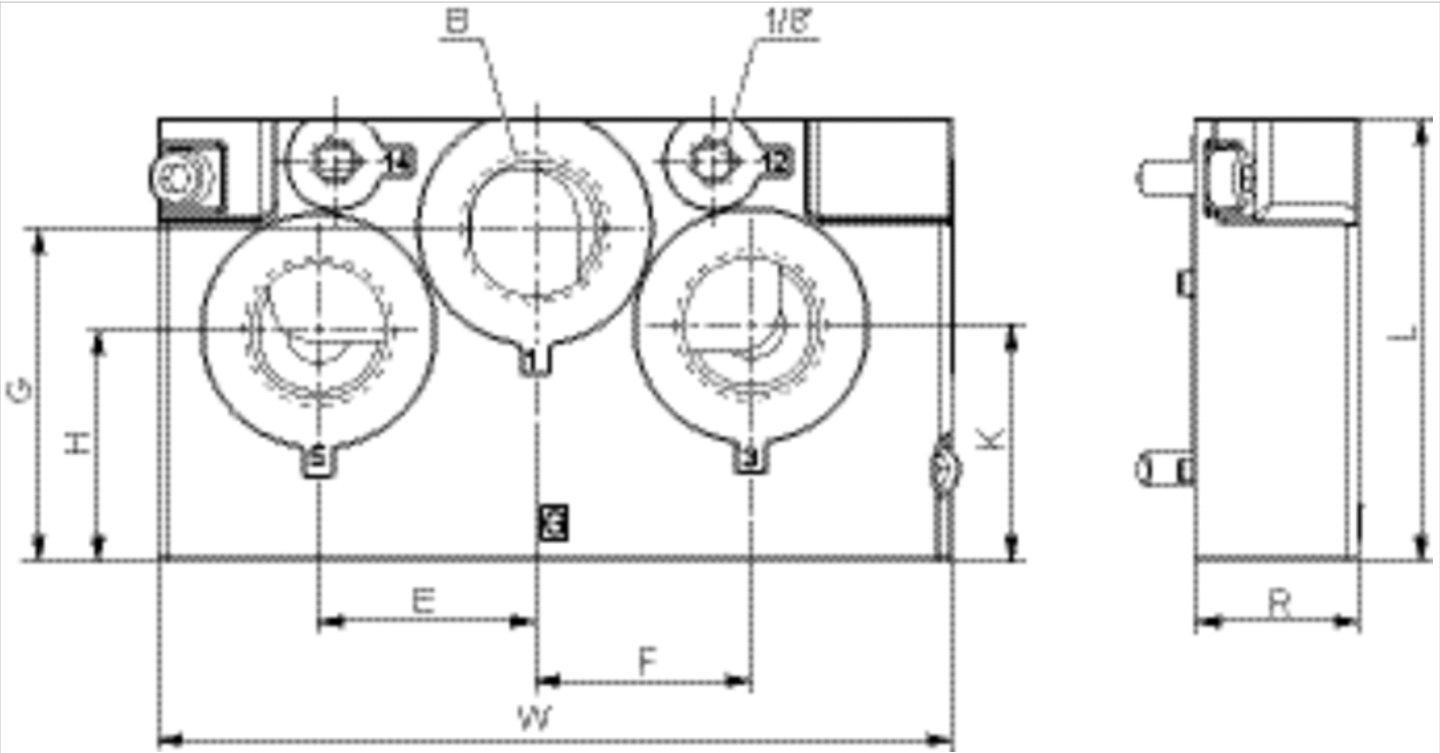

Dimensions

Part No.	Frame size	B	E	F	G	H	J	K	L	R	W
R432037645	ISO 1	3/8	23	18	15.5	30	20	37.5	60.6	25	135
R432037647	ISO 2	3/4	39	39	60	41.5	38	42.5	79.7	32	143
R432037649	ISO 3	1	49	49	76	53	32	53	100	37	164

Blanking piece

- according to ISO 5599
- standard ISO 1, ISO 2, ISO 3
- type C



Weight

See table below

Technical data

Part No.	Type	Accessory type	Frame size	Weight
R432038306	Blanking piece	type C	ISO 1	0,009 kg
R432037662	Blanking piece	type C	ISO 2	0,009 kg
R432037663	Blanking piece	type C	ISO 3	0,02 kg

Base plate, ports 2 and 4 on bottom

- standard ISO 5599-1
- Frame size ISO 1
- type K
- Compressed air connection output G 1/8, G 1/4
- Can be assembled into blocks



Standards	ISO 5599-1
Working pressure min./max.	-1 ... 16 bar
Ambient temperature min./max.	-20 ... 70 °C
Medium temperature min./max.	-20 ... 70 °C
Medium	Compressed air
Number of valve positions,max.	1
Direction of pneumatic port (2,4)	Down
Exhaust (3,5)	uncollected exhaust
Exhaust type	Ports separated
Weight	See table below

Technical data

Part No.	Compressed air connection Output [2 / 4]	Compressed air connection Pilot connection [X]	Weight	
5801720000	G 1/8	G 1/8	0,14 kg	-
5801750000	G 1/4	G 1/8	0,27 kg	1)

Scope of delivery incl. seal and mounting screws

1) Suitable for Mecproof cabinet mounting

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Die-cast aluminum, black painted
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

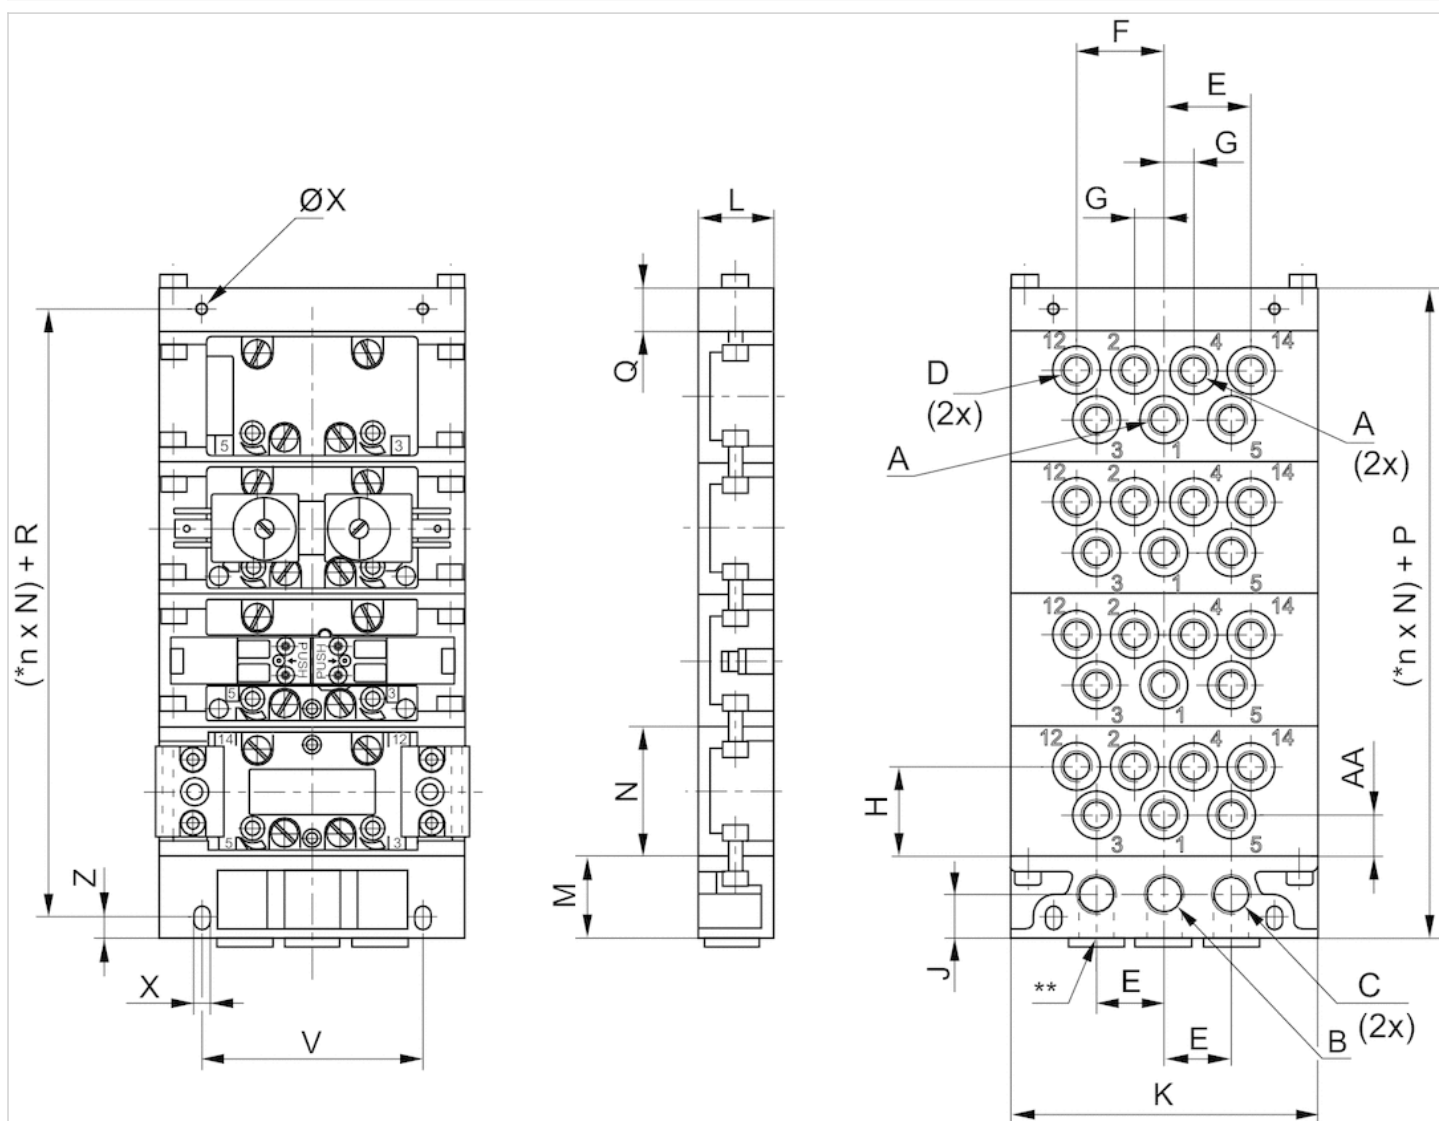

* n = Number of subbases. ** Alternative port openings, closed with plugs

Dimensions

Part No.	*		A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	V
5801720000	a	ISO 1	G 1/8	G 1/4	G 1/4	G 1/8	22	28.5	9.5	29.5	14.5	100	25	27	43	41	14	27.5	72
5801750000	b	ISO 1	G 1/4	G 3/8	G 3/8	G 1/8	27	40	12.5	26.5	20	122	30	34	43	49	15	34	94

X	Z	AA
5.4	7	8
6.4	8	10

* Intermediate plates designated with the same letters (a-d) can be mounted together without a transition plate.

Intermediate plate for separate air supply, ports 2 and 4 on bottom

- standard ISO 5599-1
- Frame size ISO 1
- type K
- Compressed air connection output G 1/8, G 1/4
- Can be assembled into blocks



Standards	ISO 5599-1
Working pressure min./max.	-1 ... 16 bar
Ambient temperature min./max.	-20 ... 70 °C
Medium temperature min./max.	-20 ... 70 °C
Medium	Compressed air
Number of valve positions,max.	1
Direction of pneumatic port (1)	Down
Direction of pneumatic port (3,5)	Down
Direction of pneumatic port (2,4)	Down
Direction of pneumatic port (14)	Down
Exhaust (3,5)	uncollected exhaust
Exhaust type	Ports separated
Weight	See table below

Technical data

Part No.	Type	Compressed air connection Input [1]
5801670000	Intermediate plate for separate air supply	G 1/8
5801680000	Intermediate plate for separate air supply	G 1/4

Part No.	Compressed air connection Output [2 / 4]	Compressed air connection Pilot connection [X]	Port	Weight
5801670000	G 1/8	G 1/8	-	0,14 kg
5801680000	G 1/4	G 1/8	G 1/4	0,27 kg

Part No.	
5801670000	-
5801680000	1)

Scope of delivery incl. seal and mounting screws

1) Suitable for Mecproof cabinet mounting

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Die-cast aluminum, black painted
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

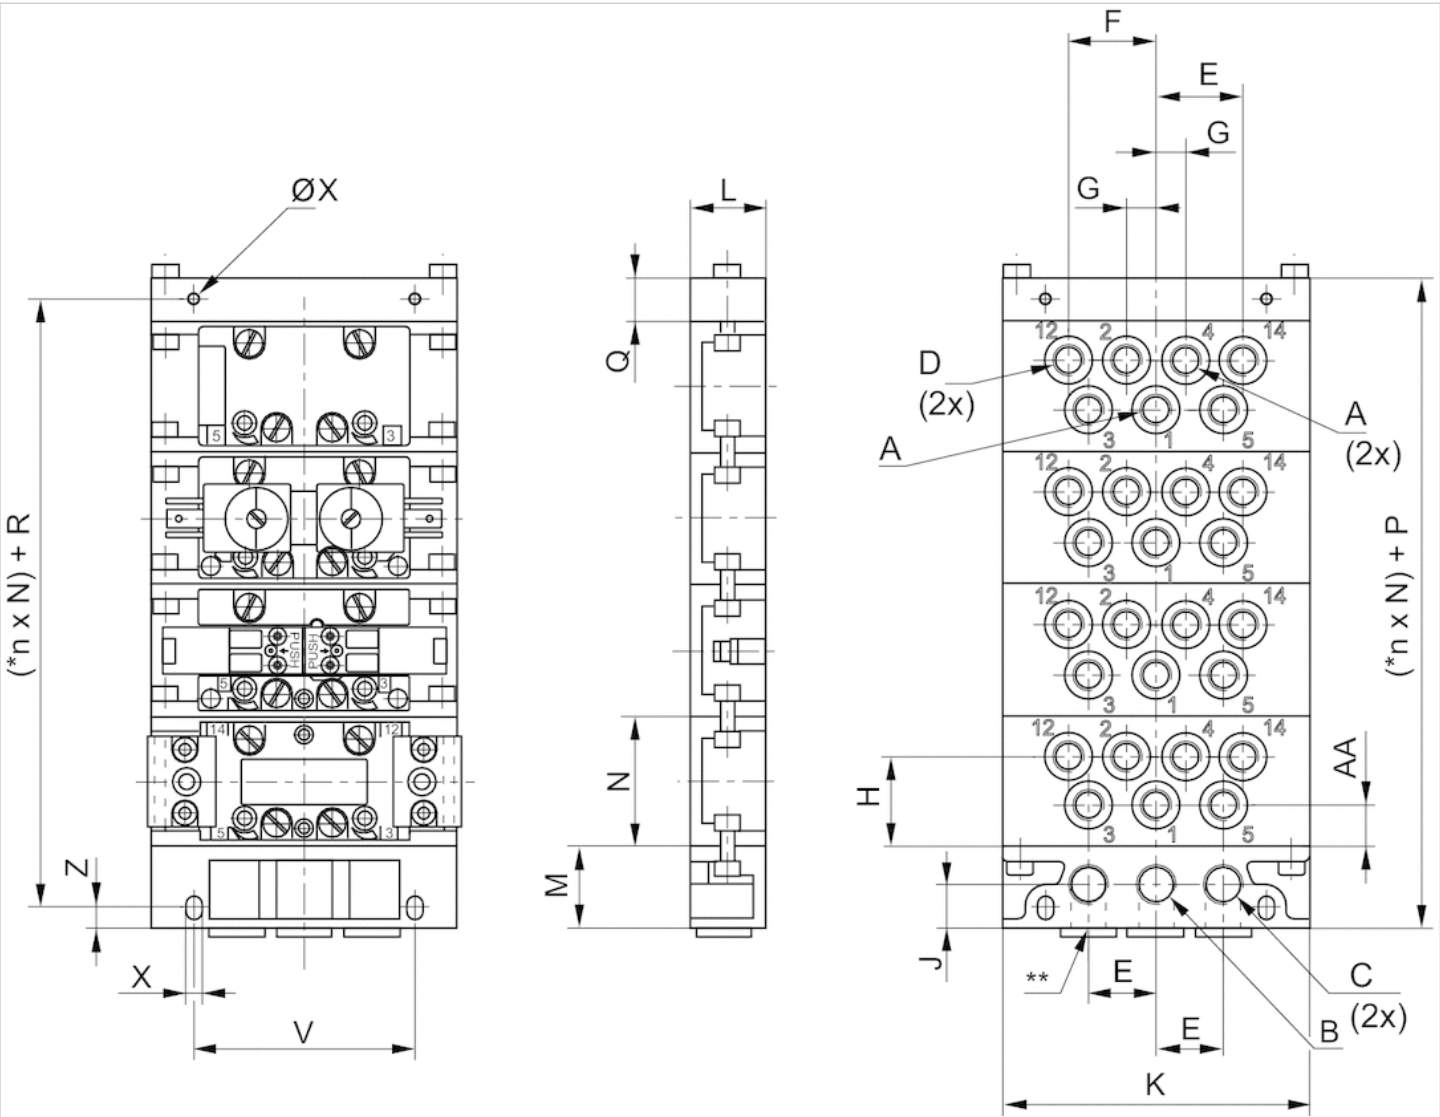

* n = Number of subbases. ** Alternative port openings, closed with plugs


Dimensions

Part No.		A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	V
5801670000	ISO 1	G 1/8	G 1/4	G 1/4	G 1/8	22	28.5	9.5	29.5	14.5	100	25	27	43	41	14	27.5	72
5801680000	ISO 1	G 1/4	G 3/8	G 3/8	G 1/8	27	40	12.5	26.5	20	122	30	34	43	49	15	34	94

X	Z	AA
5.4	7	8
6.4	8	10

End plate left, End plate right

- standard ISO 5599-1
- Frame size ISO 1
- type K
- Can be assembled into blocks

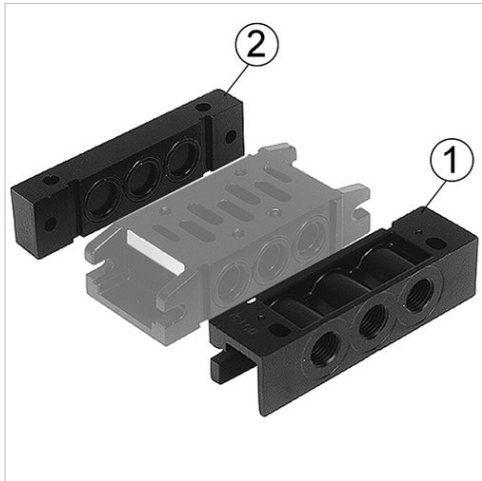

Standards

Working pressure min./max.

Ambient temperature min./max.

Medium temperature min./max.

Medium

Exhaust (3,5)

Exhaust type

Weight

ISO 5599-1

-1 ... 16 bar

-20 ... 70 °C

-20 ... 70 °C

Compressed air

uncollected exhaust

Ports separated

See table below

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Exhaust [3 / 5]	Weight
5801850000	G 1/4	G 1/4	0,15 kg
5801860000	-	-	0,08 kg

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Surface	painted
Base plate	Die-cast aluminum, black painted
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

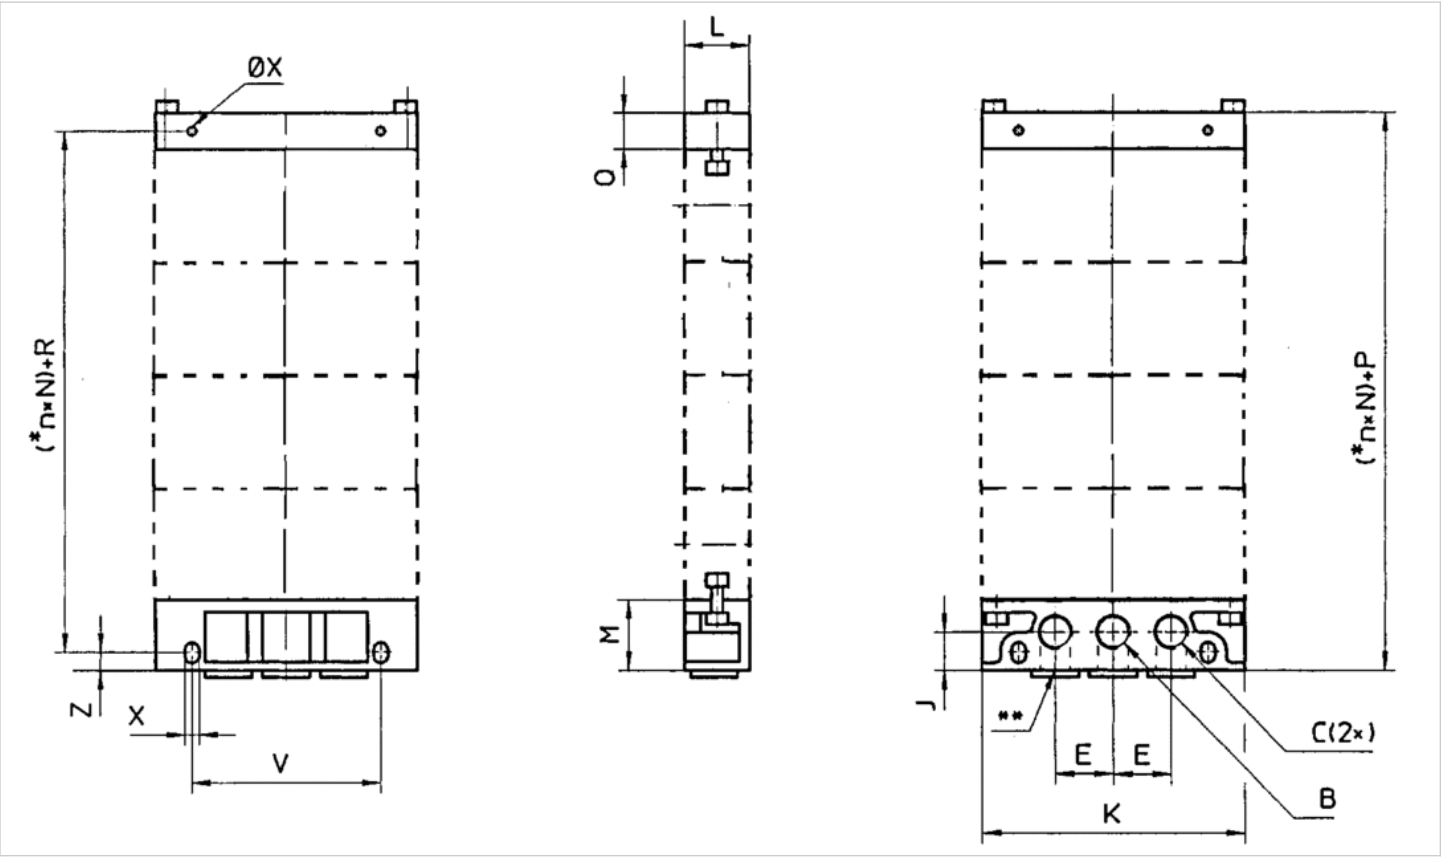

* n = Number of subbases. ** Alternative port openings, closed with plugs

Dimensions

Part No.		B	C	E	J	K	L	M	P	Q	R	V	X	Z	Weight
5801850000	ISO 1	G 1/4	G 1/4	22	14.5	100	25	27	41	-	27.5	72	5.4	7	0,15 kg
5801860000	ISO 1	-	-	-	-	100	25	-	41	14	27.5	72	5.4	-	0,08 kg

Separator set

- standard ISO 5599-1, ISO 1

- type K



Standards

ISO 5599-1

Ambient temperature min./max.

-20 ... 70 °C

Weight

0,012 kg

Technical data


Part No.	Type	Accessory type	Frame size	Delivery unit
5801880000	a	type K	ISO 1	3 piece

Technical information

Material

Housing	Brass
---------	-------

Dimensions



Dimensions

Part No.	D	H
5801880000	13,2	2

Base plate, Ports 2 and 4 side or bottom

- standard ISO 5599-1
- Frame size ISO 1
- type G
- Compressed air connection output G 1/4
- Can be assembled into blocks



Standards	ISO 5599-1
Working pressure min./max.	-1 ... 16 bar
Ambient temperature min./max.	-20 ... 70 °C
Medium temperature min./max.	-20 ... 70 °C
Medium	Compressed air
Number of valve positions,max.	1
Direction of pneumatic port (2,4)	Both directions possible
Direction of pneumatic port (14)	Down
Exhaust (3,5)	uncollected exhaust
Exhaust type	Ports separated
Weight	0,23 kg

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Output [2 / 4]
5801500000	G 1/4	G 1/4

Part No.	Compressed air connection Pilot connection [X]
5801500000	G 1/8

Scope of delivery incl. seal and mounting screws

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Die-cast aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

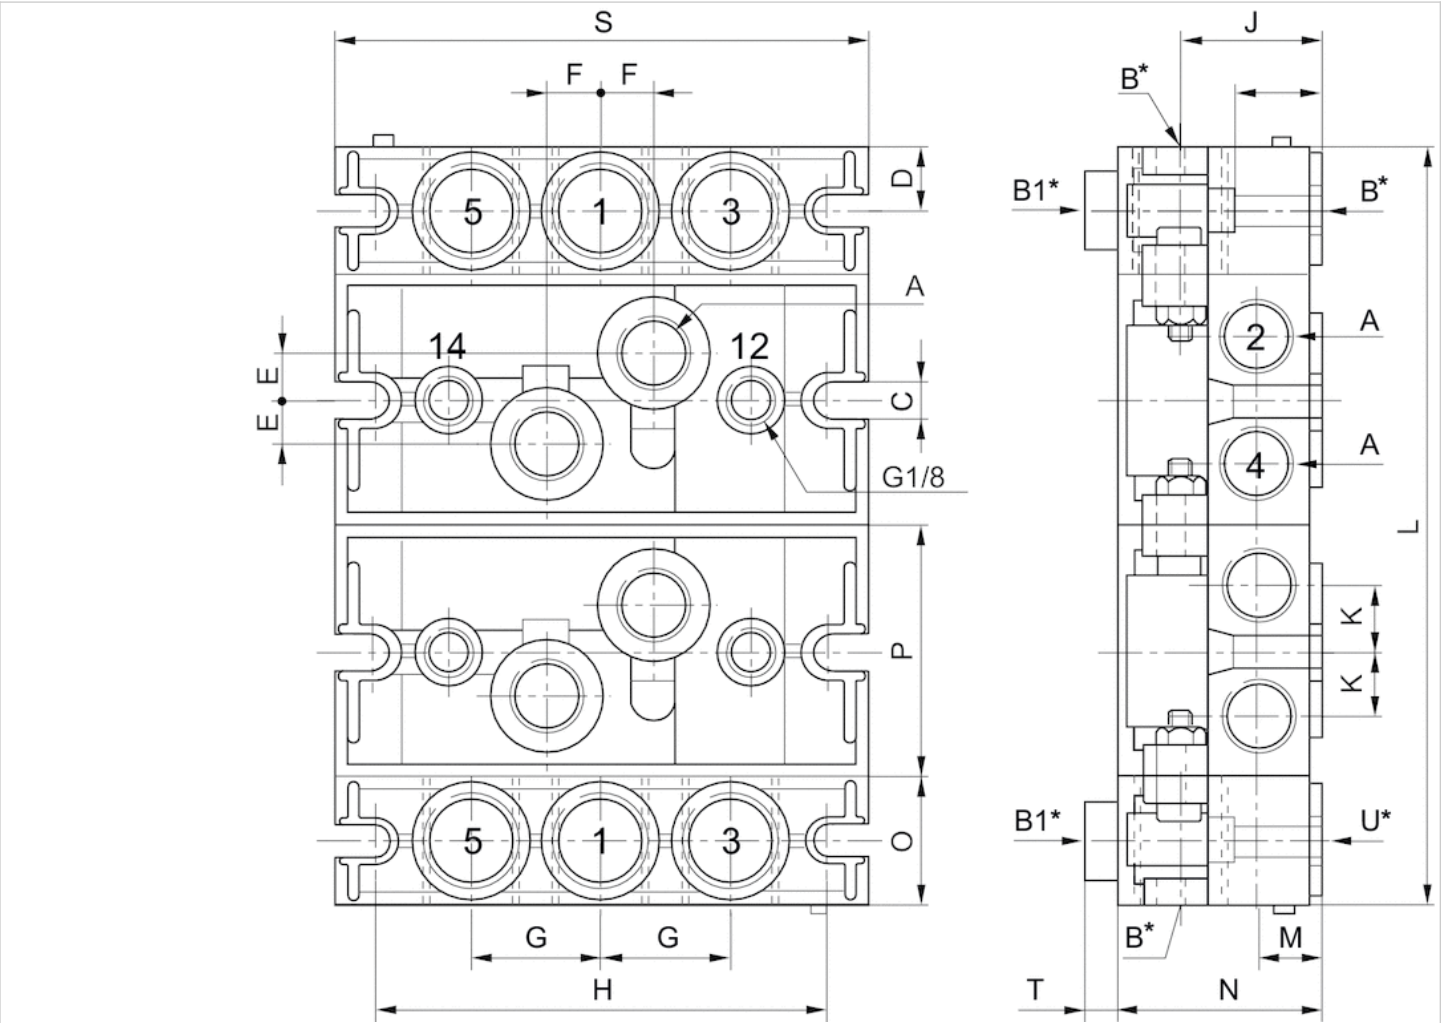

Dimensions

Part No.		A	B	B1	C	D	E	F	G	H	J	K	L	M
5801500000	ISO 1	2 x G 1/4	3 x G 3/8	3 x G 1/4	5.5	11	5.5	9	22	92	24	12	n x 43 + 44	12
N	O	P	R	S	T									
36	22	45.7	17	106	8									

n = number of subbases

End plate left, End plate right

- standard ISO 5599-1
- Frame size ISO 1
- type G
- Can be assembled into blocks
- Base plate principle, multiple
- Reversed pressure supply permissible



Standards

Compressed air connection
Working pressure min./max.
Ambient temperature min./max.
Medium temperature min./max.
Medium
Direction of pneumatic port (1)
Direction of pneumatic port (3,5)
Exhaust (3,5)
Exhaust type
Weight

ISO 5599-1

according to ISO 5599-1
-1 ... 16 bar
-20 ... 70 °C
-20 ... 70 °C
Compressed air
Both directions possible
Both directions possible
uncollected exhaust
Ports separated
0,26 kg

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Exhaust [3 / 5]
5801510000	G 3/8	G 3/8

Delivered in pairs with all ports closed. Porting can be in end, top, or bottom (both ends). Porting is selected by drilling through dimensions B*, B1*, or U* on drawing below., Scope of delivery incl. seal and mounting screws

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
The oil content of compressed air must remain constant during the life cycle.
Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Die-cast aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

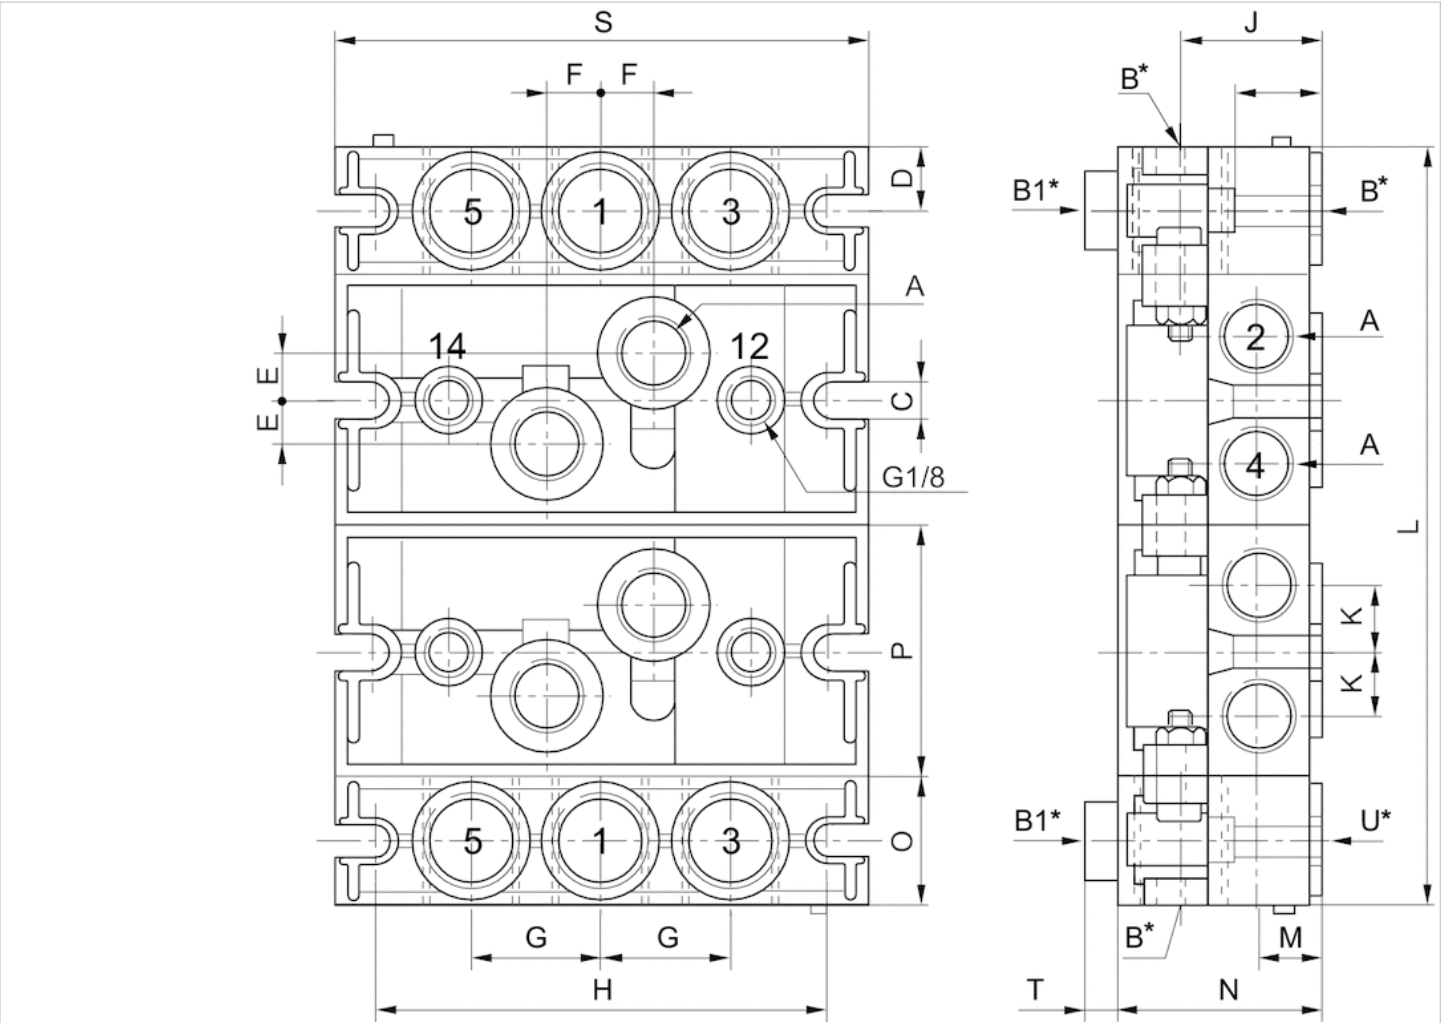

Dimensions

Part No.		A	B*	B1*	C	D	E	F	G	H	J	K	L	M
5801510000	ISO 1	2 x G 1/4	3 x G 3/8	3 x G 1/4	5.5	11	5.5	9	22	92	24	12	n x 43 + 44	12
N	O	P	R	S	T	U*								
36	22	45.7	17	106	8	3 x G 3/8								

n = number of subbases

*Dimensions B, B1, and U are prepared with threaded connections but must be drilled through as required for the desired porting configuration.

Transition plate

- standard ISO 5599-1
- Frame size ISO 1, ISO 2
- type G
- Can be assembled into blocks
- Reversed pressure supply permissible



Standards	ISO 5599-1
Working pressure min./max.	-1 ... 16 bar
Ambient temperature min./max.	-20 ... 70 °C
Medium temperature min./max.	-20 ... 70 °C
Medium	Compressed air
Exhaust (3,5)	uncollected exhaust
Exhaust type	Ports separated
Weight	0,27 kg

Technical data

Part No.

5802520000

Scope of delivery incl. seal and mounting screws

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).


The transition plate is used for combining subbases of different sizes in the same manifold.

Technical information

Material	
Surface	painted
Base plate	Die-cast aluminum, black painted
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

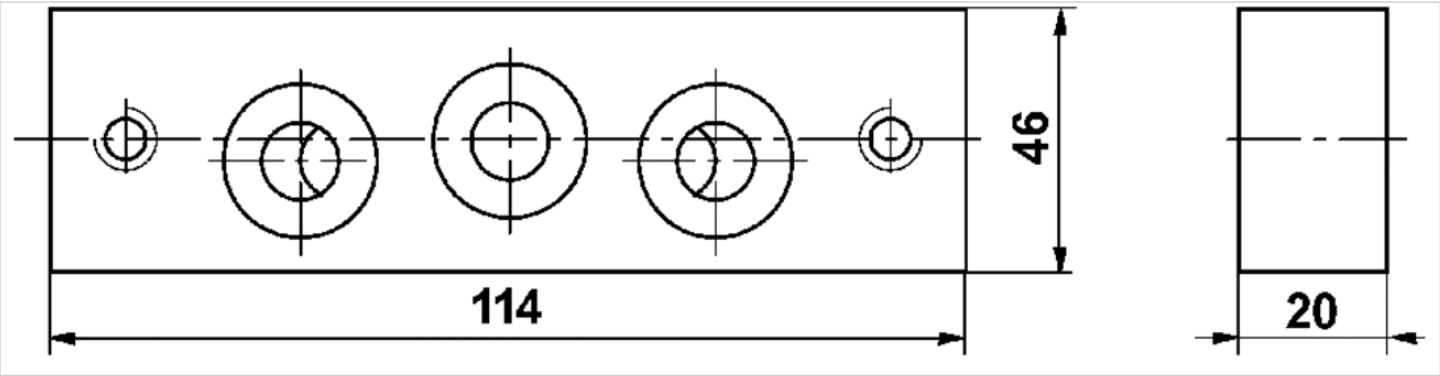

Blanking piece

- standard ISO 5599-1
- type G



Standards	ISO 5599-1
Ambient temperature min./max.	-20 ... 70 °C
Weight	0,011 kg

Technical data

Part No.	Accessory type
5801530000	type G

Technical information

Material	
Housing	Brass
Seal	Acrylonitrile butadiene rubber

Base plate, Ports 2 and 4 on side, 1,2 and 4 also on bottom

- standard ISO 5599-1
- Frame size ISO 1
- type H
- Compressed air connection output G 1/4
- Can be assembled into blocks



Standards	ISO 5599-1
Working pressure min./max.	0 ... 16 bar
Ambient temperature min./max.	-15 ... 70 °C
Medium temperature min./max.	-15 ... 80 °C
Medium	Compressed air
Grid dimension	43 mm
Exhaust type	Ports separated
Mounting screw	with hexagon socket
Weight	See table below

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Output [2 / 4]
1825503286	-	G 1/4
1825503288	-	G 1/4
1825503290	G 1/4	G 1/4
1825503292	G 1/4	G 1/4

Part No.	Compressed air connection Pilot connection [X]	Compressed air connection Pilot control exhaust [R]	Weight	Fig.
1825503286	M5	M5	0,24 kg	Fig. 1
1825503288	M5	M5	0,24 kg	Fig. 2
1825503290	M5	M5	0,27 kg	Fig. 3
1825503292	M5	M5	0,27 kg	Fig. 4

Part No.	
1825503286	1)
1825503288	2)
1825503290	3)
1825503292	4)

Scope of delivery incl. seal and mounting screws

- 1) Ports 2 and 4 on side, control pressure connection 12 and 14: single connection
- 2) Ports 2 and 4 on side, control pressure connection 12 and 14: central manifold
- 3) Ports 2 and 4 on side, 1,2 and 4 also on bottom, control pressure connection 12 and 14: single connection
- 4) Ports 2 and 4 on side, 1,2 and 4 also on bottom, control pressure connection 12 and 14: central manifold

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .


The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in the MediaCentre).

Technical information

Material	
Housing	Die-cast aluminum
Base plate	Die-cast aluminum
Seal	Acrylonitrile butadiene rubber

Fig. 4 Ports 2 and 4 on side 12 and 4 also on bottom Control pressure connection 12+14: central

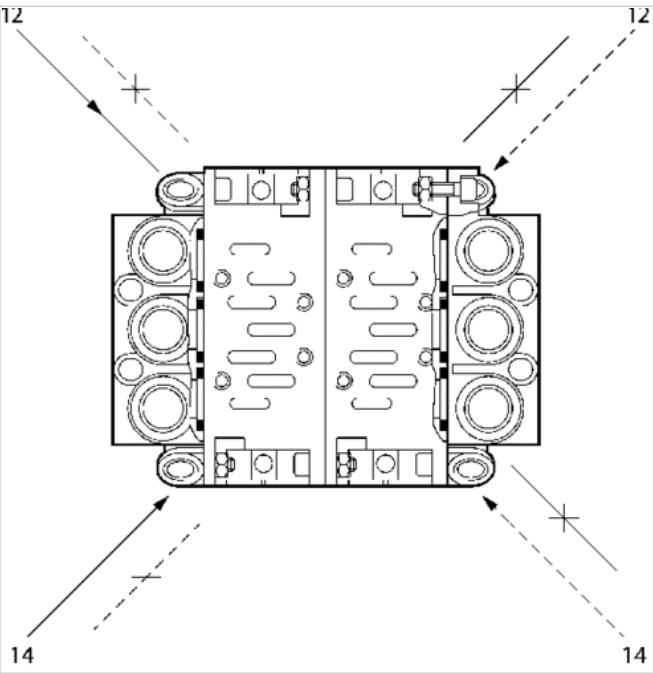

Dimensions

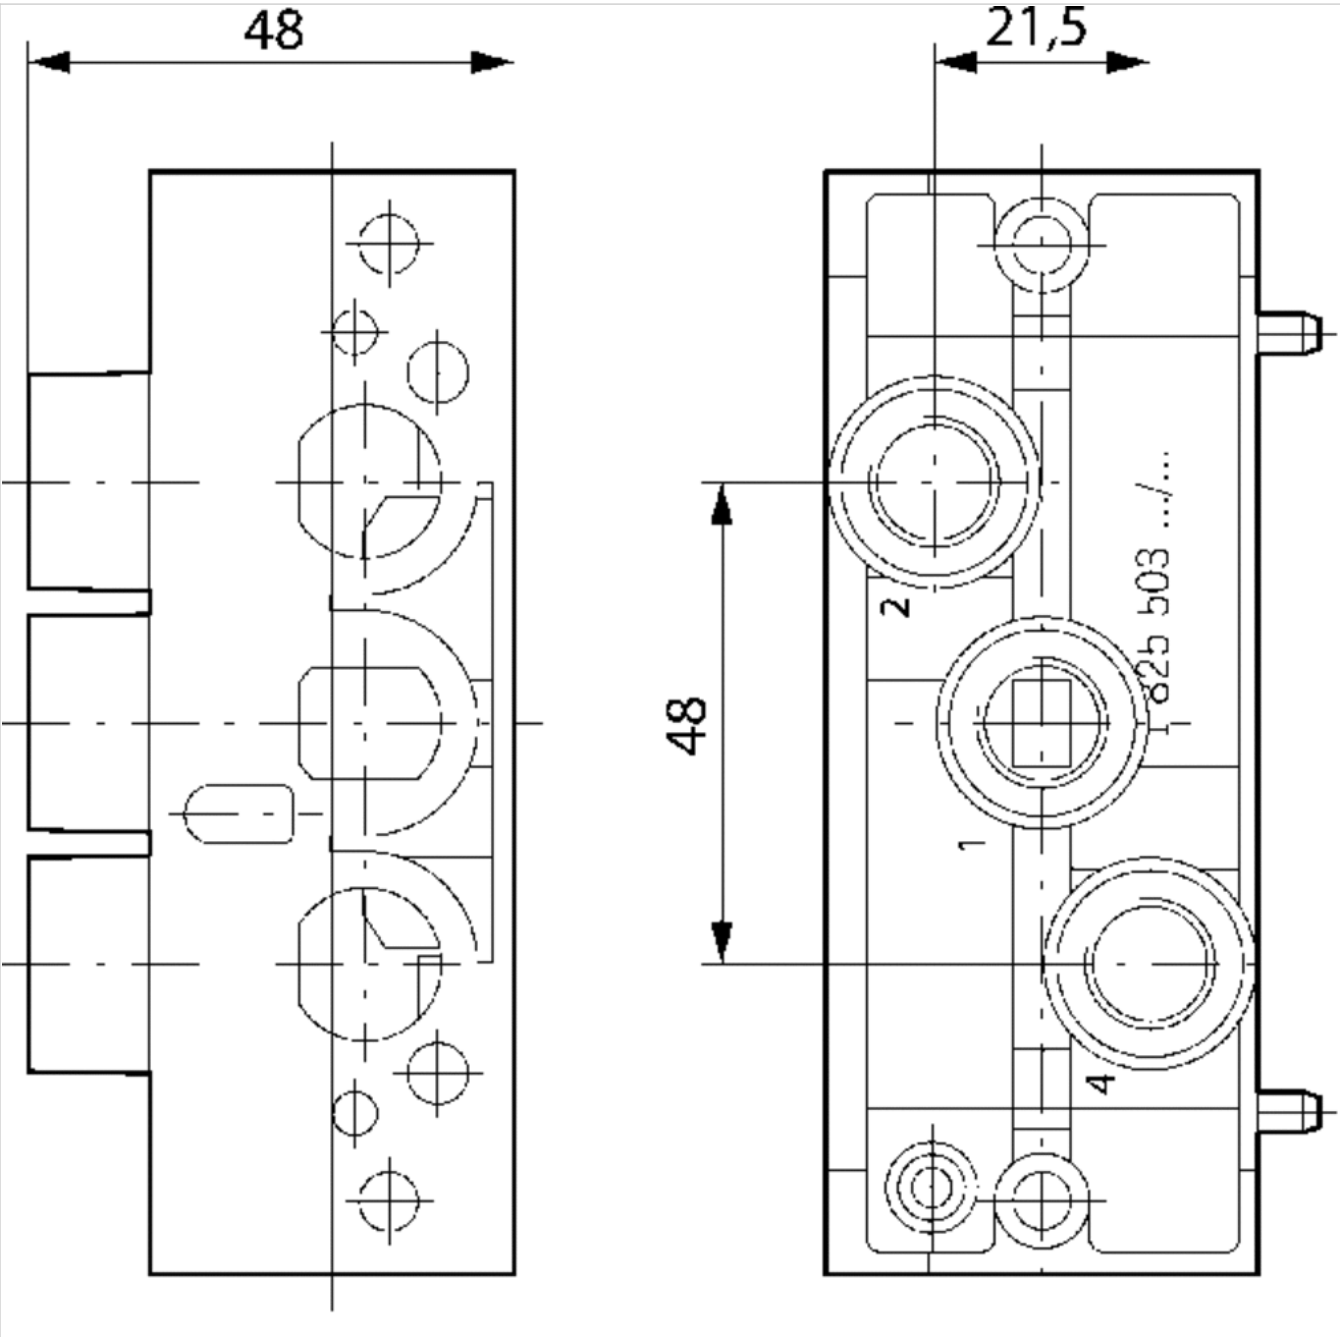


Fig. 1 ports 2 and 4 on side Control pressure connection 12+14: single connection

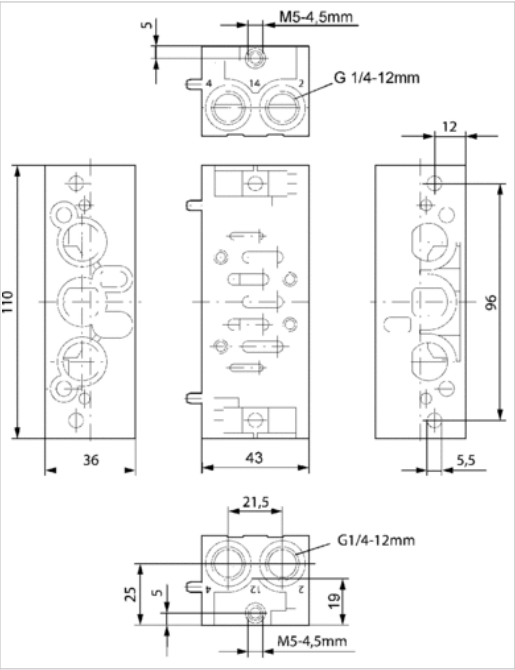
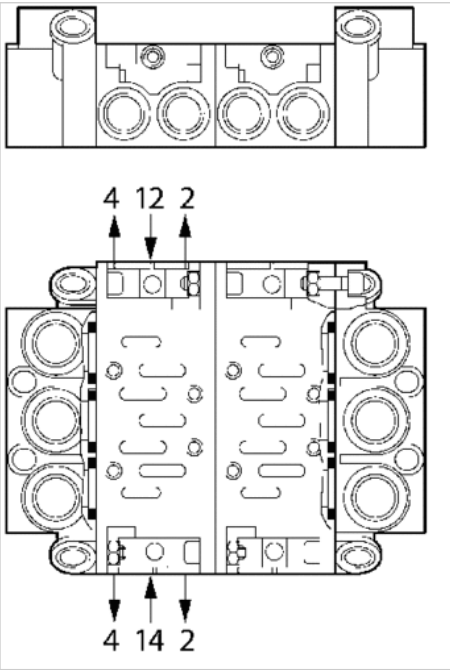


Fig. 2 ports 2 and 4 on side Control pressure connection 12+14: central manifold



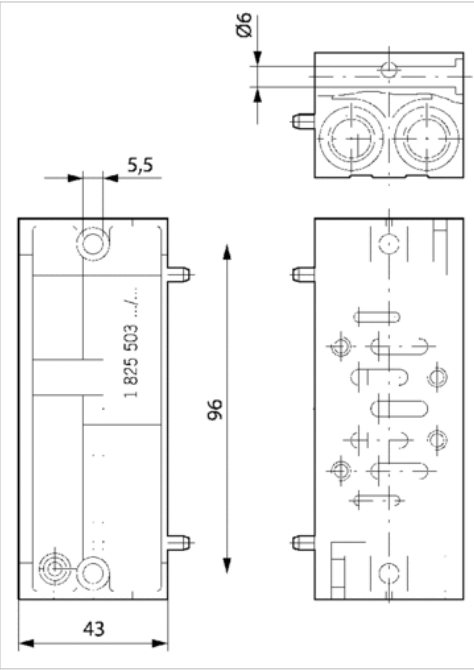


Fig. 3 Ports 2 and 4 on side 12 and 4 also on bottom Control pressure connection 12+14: single

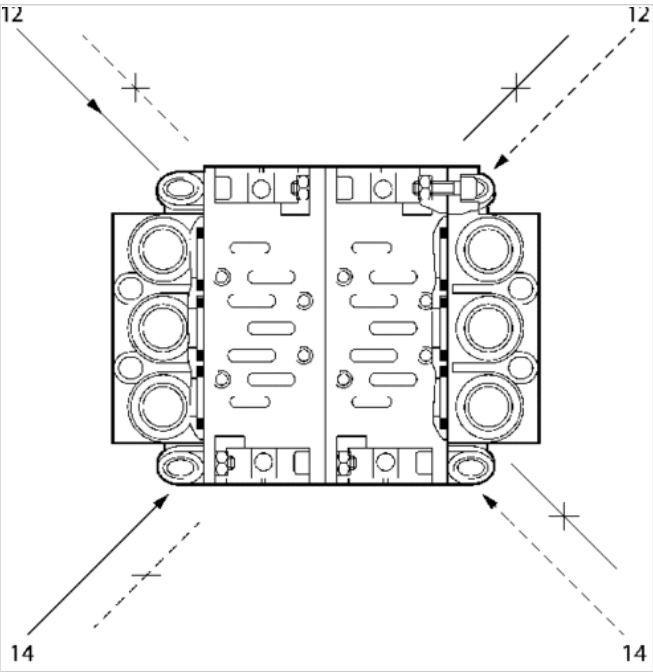

End plate left, End plate right

- standard ISO 5599-1
- Frame size ISO 1
- type H
- Can be assembled into blocks

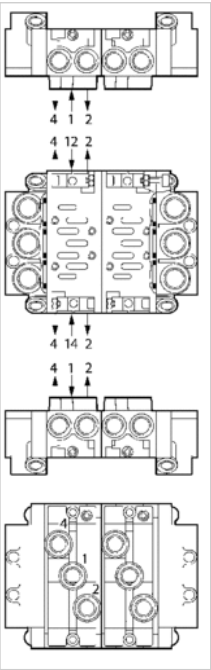

Standards	ISO 5599-1
Working pressure min./max.	0 ... 16 bar
Ambient temperature min./max.	-15 ... 70 °C
Medium temperature min./max.	-15 ... 70 °C
Medium	Compressed air
Exhaust (3,5)	With directional exhaust (3/5)
Exhaust type	Ports separated
Mounting screw	with hexagon socket
Weight	See table below

Technical data

Part No.	Compressed air connection Input [1]	Compressed air connection Exhaust [3 / 5]
1825503294	G 3/8	G 3/8
1825503297	G 3/8	G 3/8

Part No.	Compressed air connection Pilot connection [X]	Compressed air connection Pilot control exhaust [R]	Weight	Fig.
1825503294	G 1/8	G 1/8	0,404 kg	Fig. 1
1825503297	G 1/8	G 1/8	0,382 kg	Fig. 2

Scope of delivery incl. seal and mounting screws

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Die-cast aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

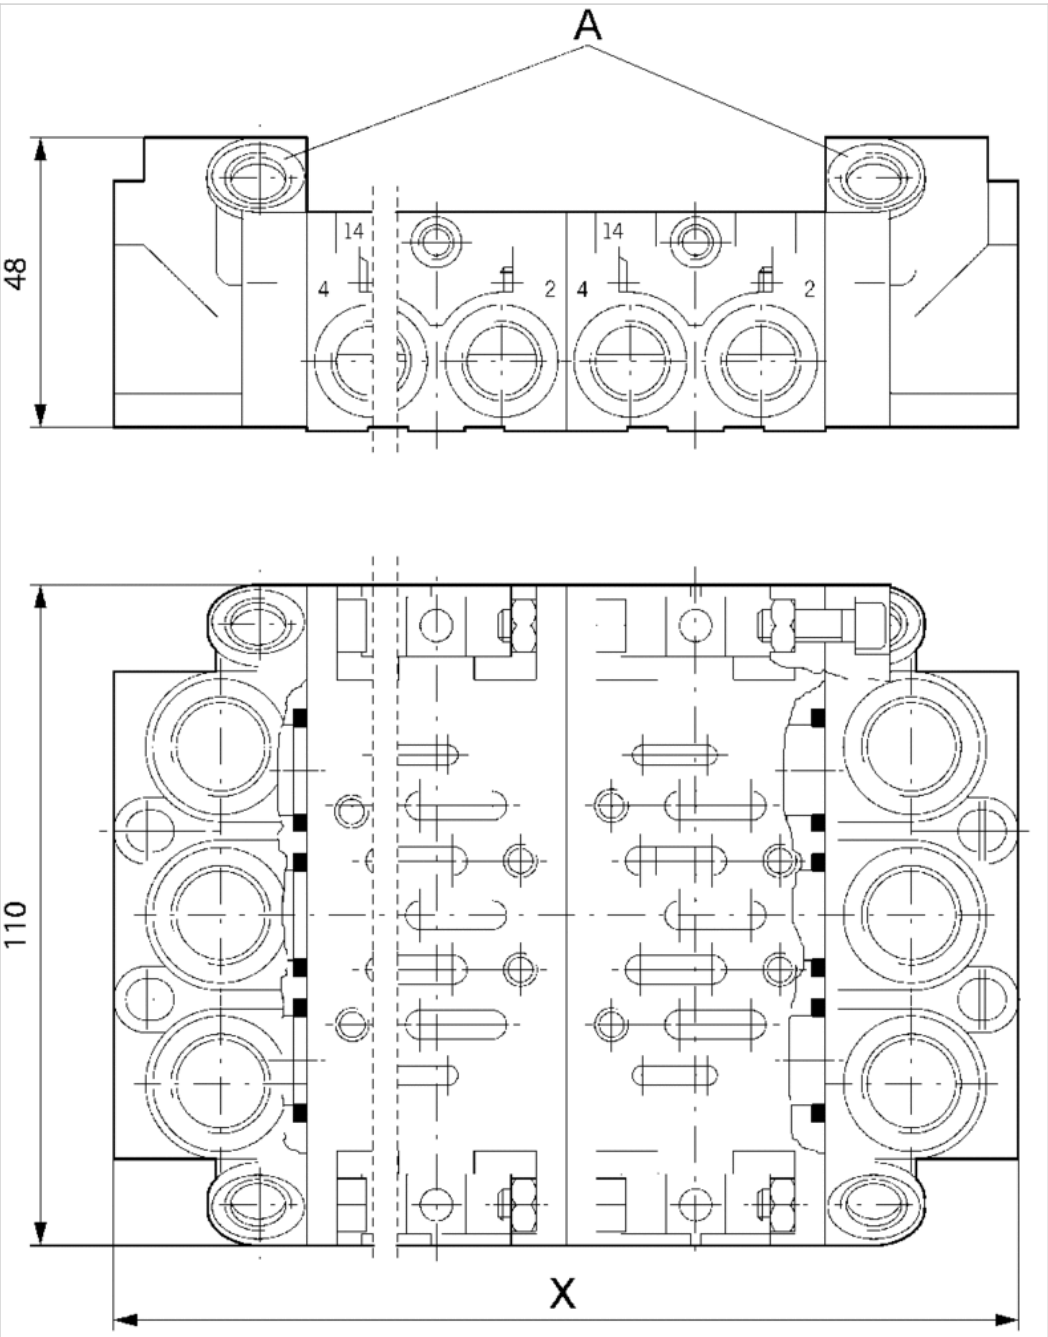


A = left and right end plates in two versions


Dimensions

n	X
2	150
3	193
4	236
...	...
n	n*43+64

n = number of valve positions

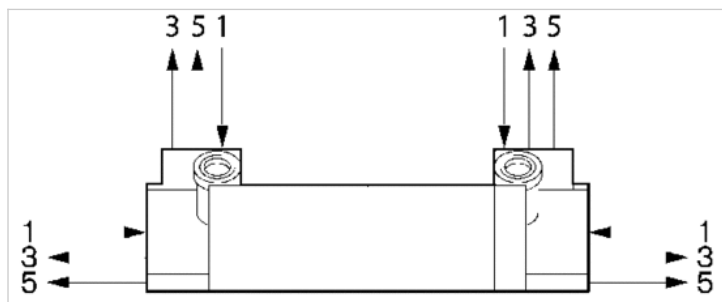

Dimensions

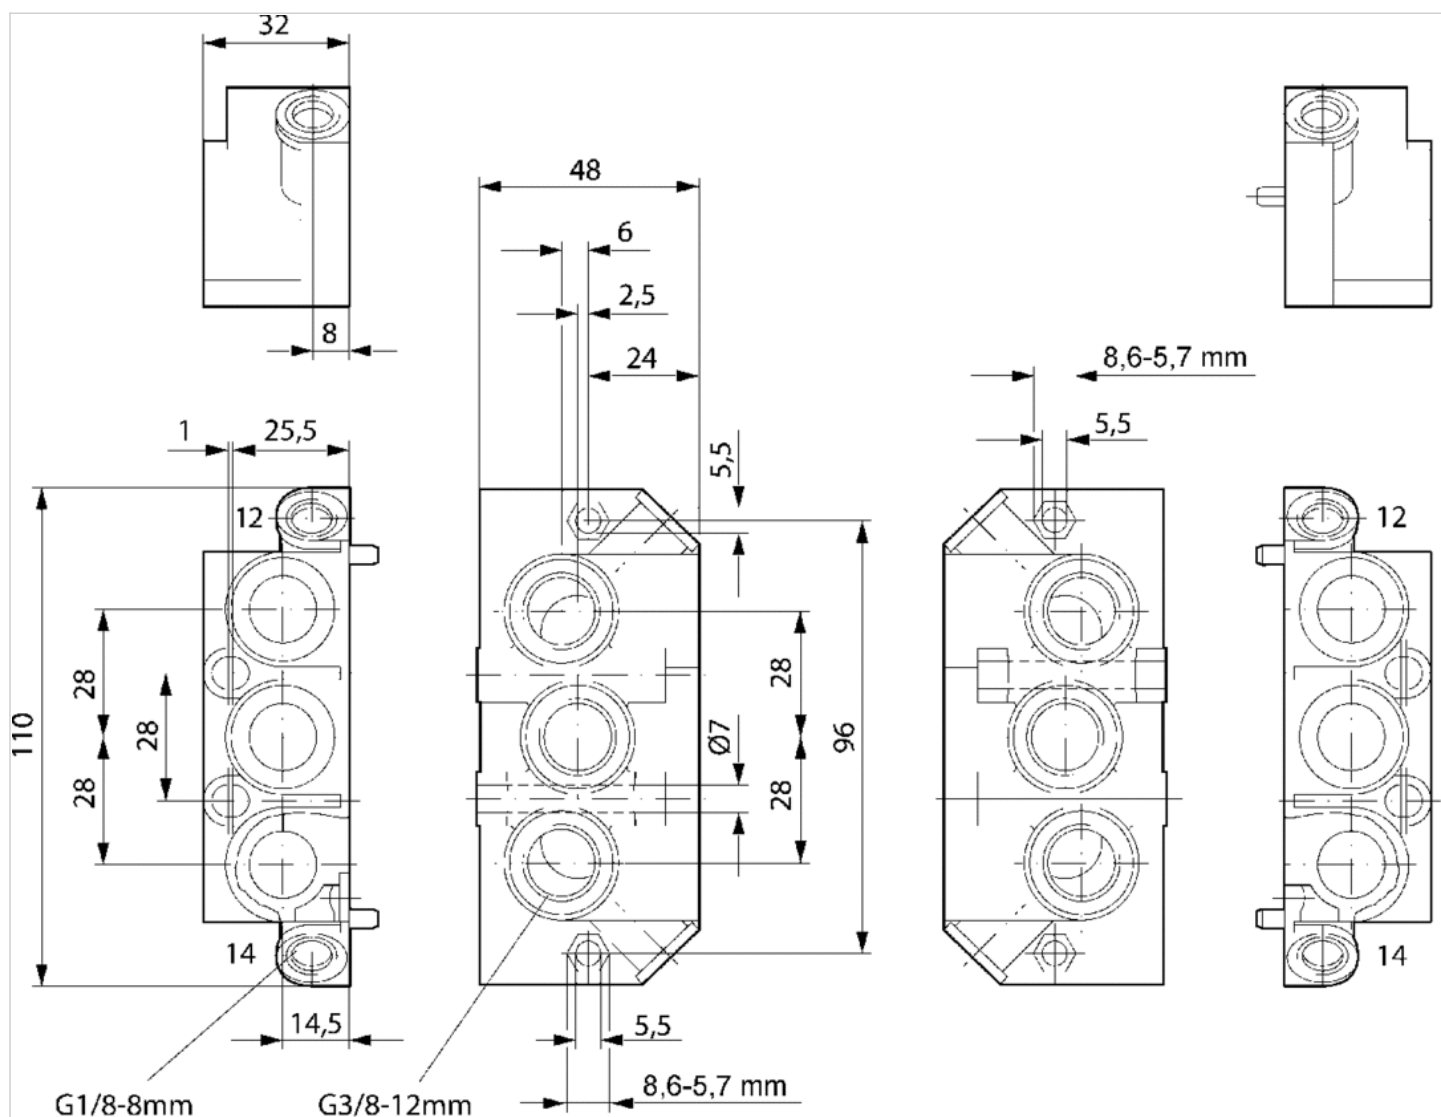


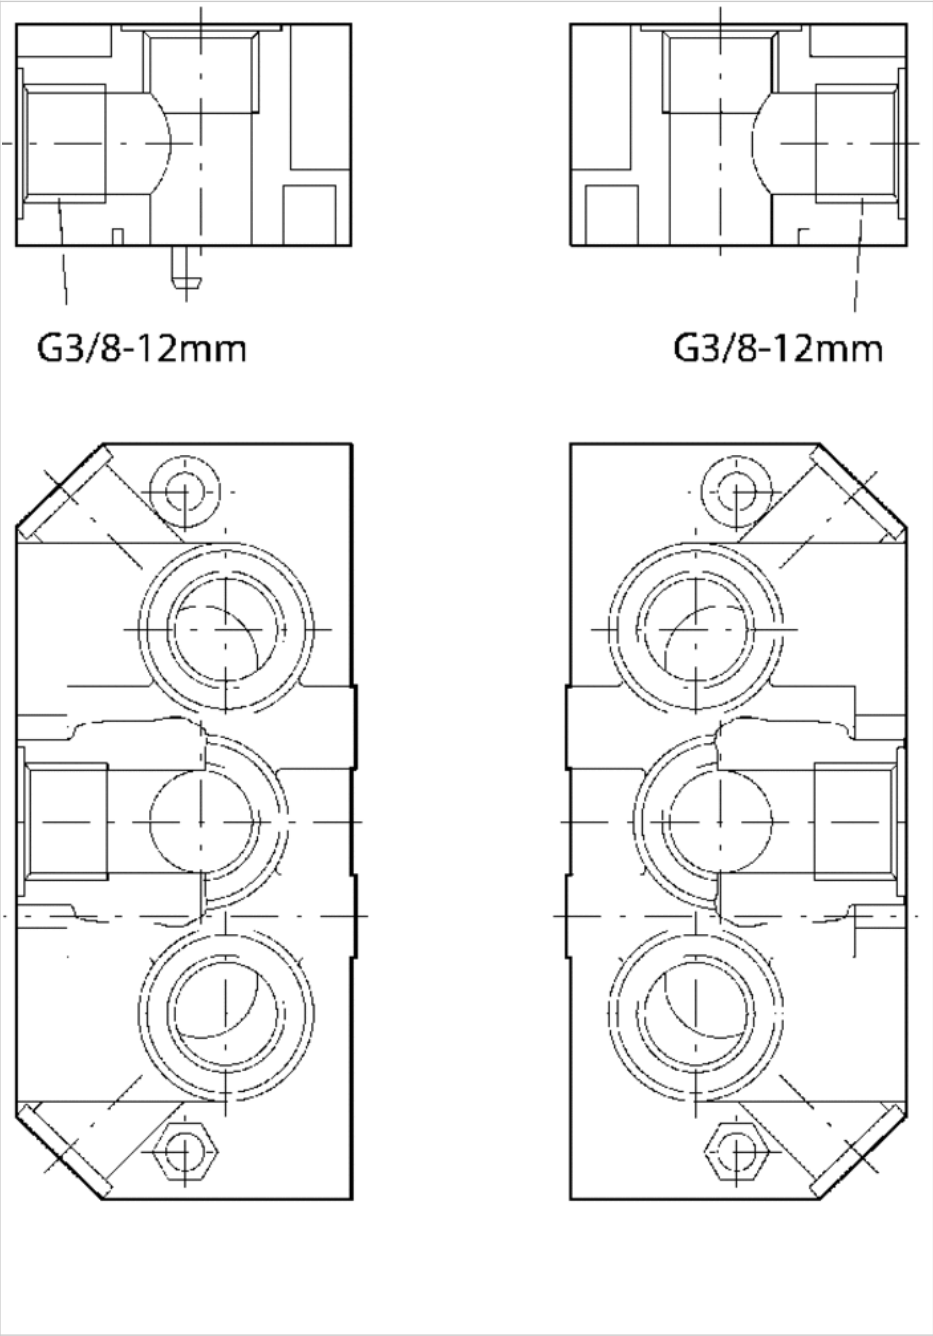


Fig. 1 Thread connections 1 3 and 5 axial



Supply plate

- standard ISO 5599-1
- Frame size ISO 1
- type H
- Can be assembled into blocks
- Plate principle

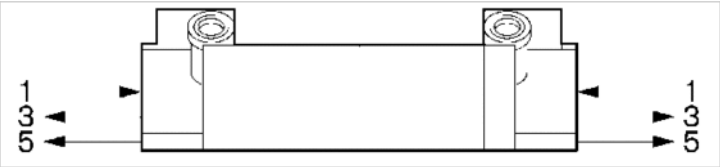

Standards	ISO 5599-1
Working pressure min./max.	1 ... 10 bar
Medium	Compressed air
Grid dimension	30 mm
Direction of pneumatic port (1)	Up
Direction of pneumatic port (3,5)	Up
Exhaust (3,5)	With directional exhaust (3/5)
Mounting screw	with hexagon socket
Weight	0,22 kg

Technical data

Part No.	Compressed air connection	Compressed air connection
	Input [1]	Exhaust [3 / 5]
1825503314	G 3/8	G 3/8

Scope of delivery incl. seal and mounting screws

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Housing	Aluminum
Base plate	Aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

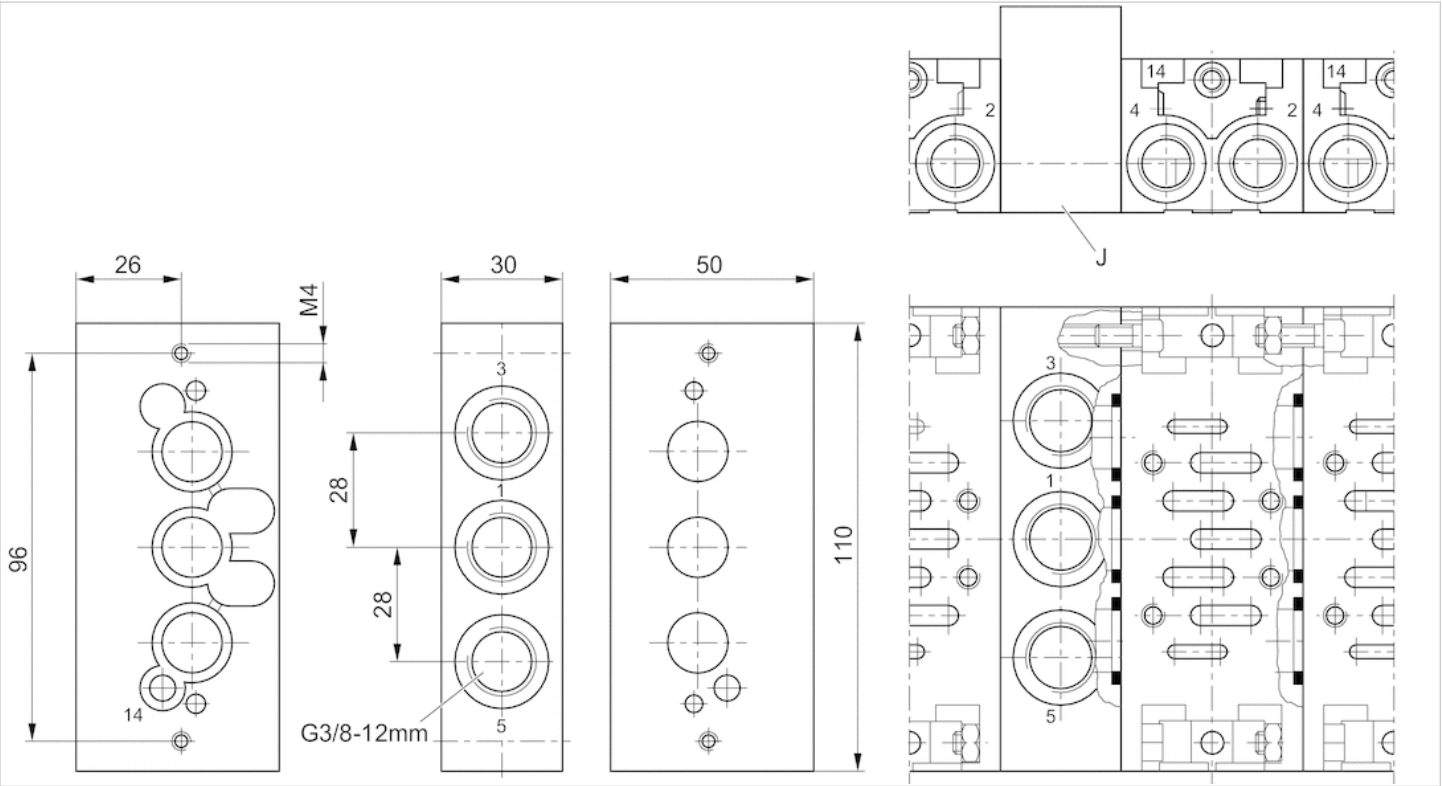

Seal for supply plate

- standard ISO 5599-1

- type H



Standards

ISO 5599-1

Ambient temperature min./max.

-20 ... 70 °C

Weight

See table below

Technical data


Part No.	Fig.	Type	Accessory type
1821015047	Fig. 1	Molded seal, separate channel 1, connect channels 5 and 3	type H
1821015043	Fig. 2	Molded seal, separate channels 1, 3 and 5	type H

Part No.	Delivery unit	Weight
1821015047	1 piece	0,004 kg
1821015043	1 piece	0,01 kg

Technical information

Material	
Seal	Acrylonitrile butadiene rubber

Dimensions

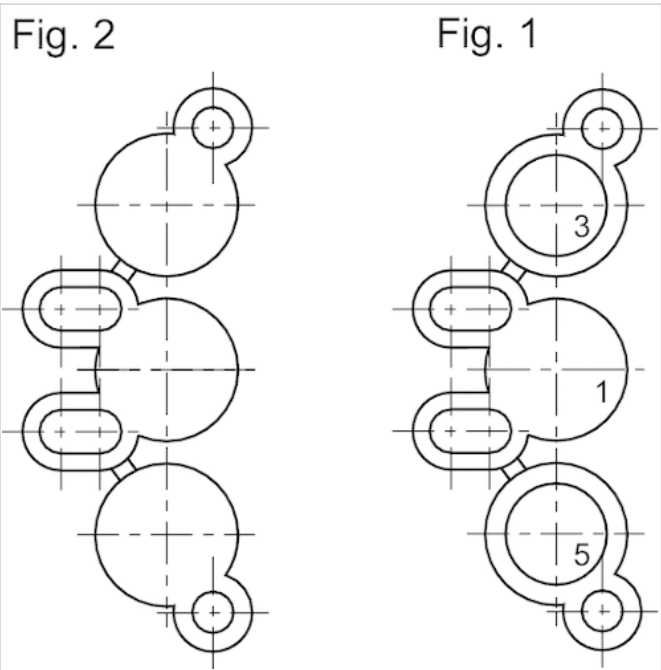

Blanking plate

- standard ISO 5599-1
- Frame size ISO 1



Standards	ISO 5599-1
Working pressure min./max.	-0,9 ... 16 bar
Ambient temperature min./max.	0 ... 80 °C
Medium temperature min./max.	0 ... 80 °C
Medium	Compressed air
Mounting screw	with hexagon socket
Weight	See table below

Technical data

Part No.	Type	Frame size	Weight
1825503282	Blanking plate	ISO 1	0,072 kg
1821015028	Gasket ISO 1	-	-

Scope of delivery incl. seal and mounting screws


Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Die-cast aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

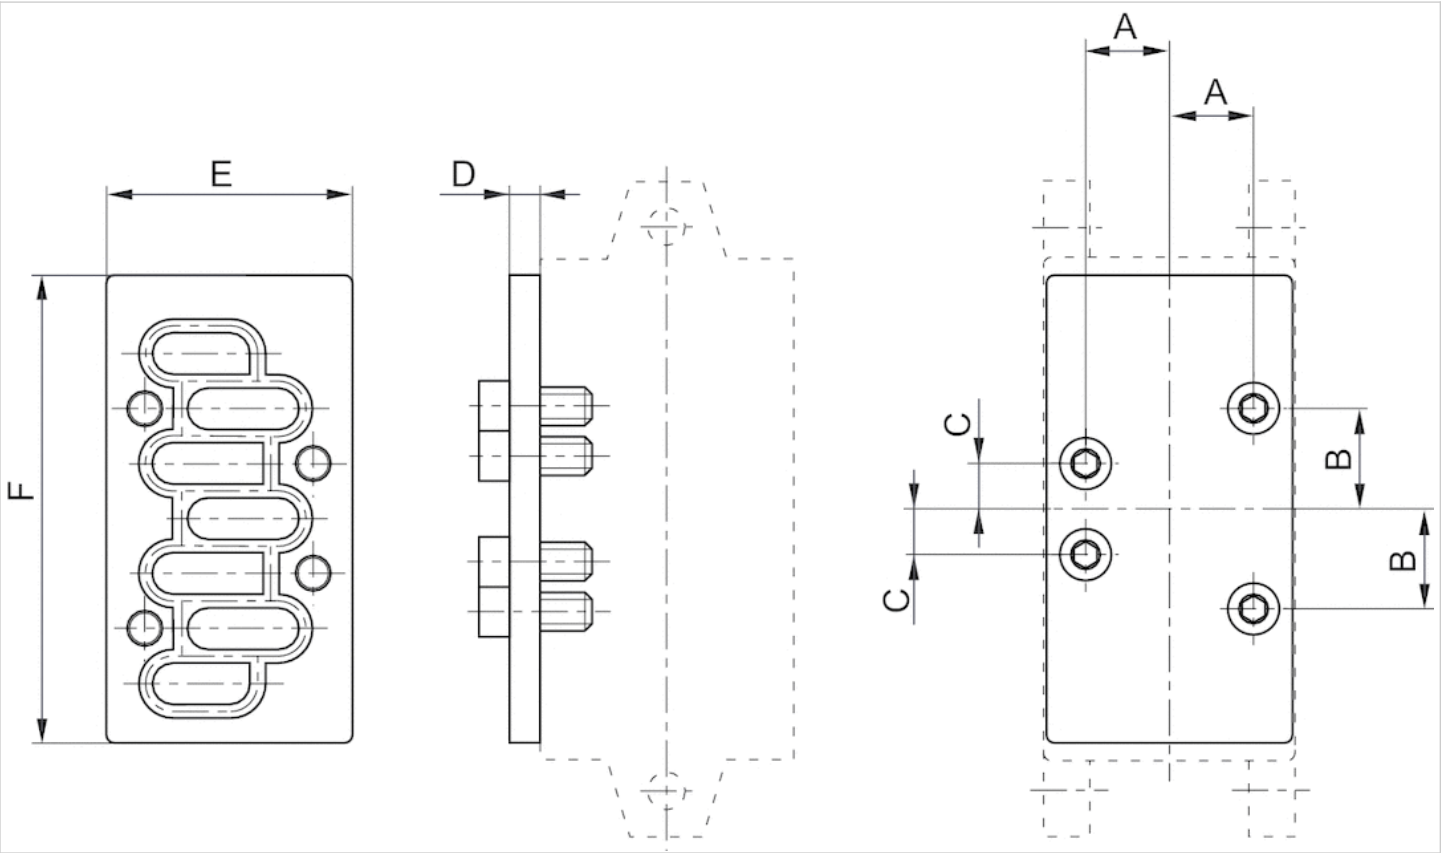

Dimensions

Part No.	Frame size	A	B	C	D	E	F
1825503282	ISO 1	14	18	9	7	42	80

Blanking plate

- standard ISO 5599-1
- Frame size ISO 1



Standards	ISO 5599-1
Working pressure min./max.	-1 ... 16 bar
Ambient temperature min./max.	-20 ... 70 °C
Medium temperature min./max.	-20 ... 70 °C
Medium	Compressed air
Number of valve positions,max.	1
Weight	0,055 kg

Technical data

Part No.

5801870000

Scope of delivery incl. seal and mounting screws

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
 The oil content of compressed air must remain constant during the life cycle.
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Housing	Die-cast aluminum, black painted
Base plate	Die-cast aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

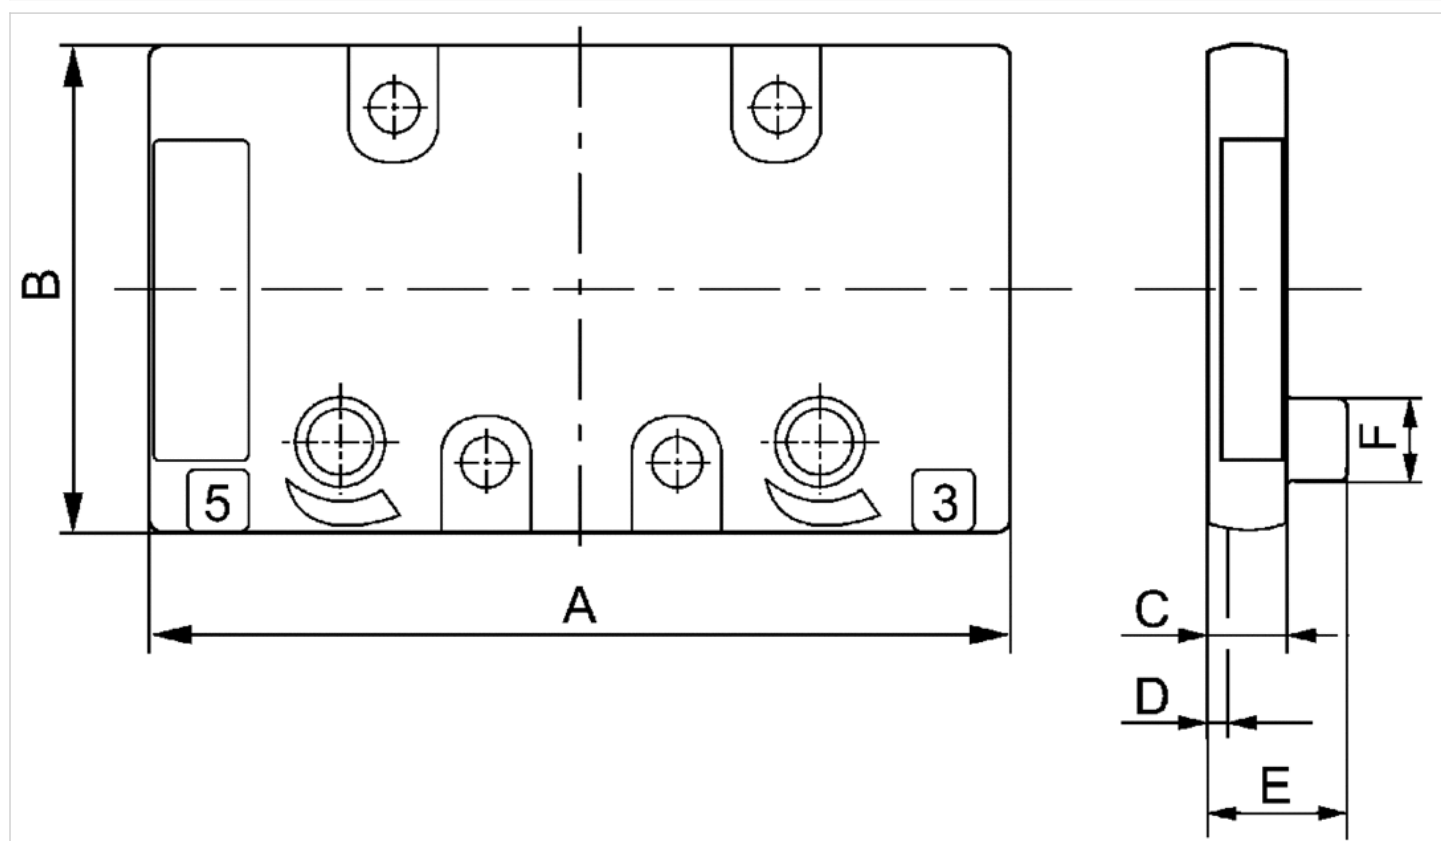


Dimensions

Part No.	A	B	C	D	E	F	Weight
5801870000	69	39	7	2	–	–	0,055 kg

Throttle plate

- standard ISO 5599-1
- Frame size ISO 1

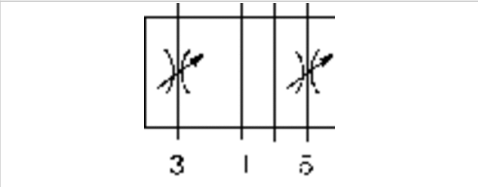

Standards	ISO 5599-1
Working pressure min./max.	0 ... 16 bar
Ambient temperature min./max.	0 ... 80 °C
Medium temperature min./max.	0 ... 80 °C
Medium	Compressed air
Weight	0,255 kg

Technical data

Part No.
0821201023

Scope of delivery incl. seal and mounting screws

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in the MediaCentre).

Technical information

Material	
Base plate	Aluminum
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions

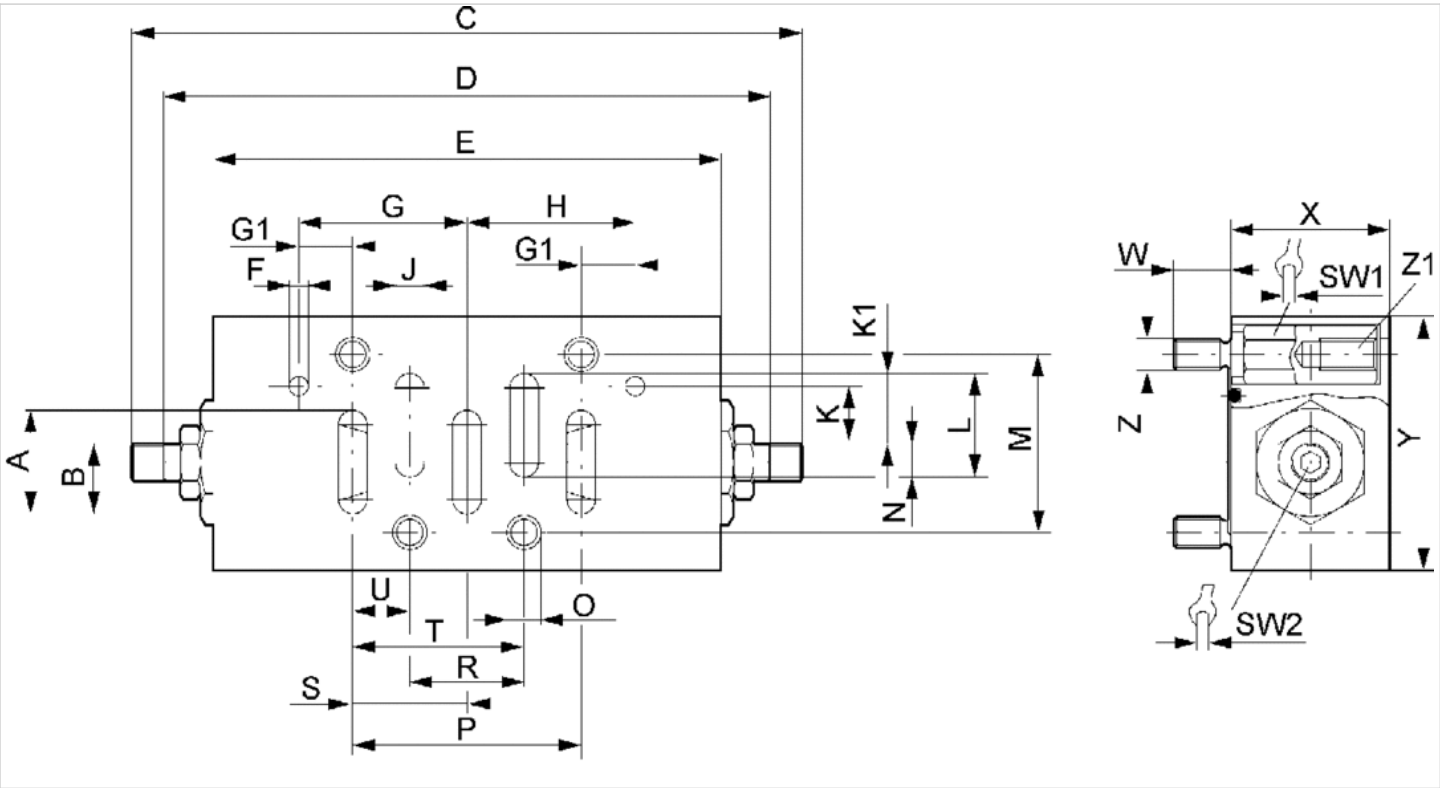

Dimensions

Part No.	A	B	C	D	E	F	G	G1	H	J	K	K1	L	M	N	O	P	R	S	SW1	SW2	T
0821201023	16.3	11,1	105.6	95.6	80	3	26,5	8.5	26.5	4.5	9	10.8	16.3	28	5.5	5.2	36	18	18	8	3	27

U	W	X	Y	Z	Weight	Z1
9	9	25	40	M5	0,255 kg	M5-9

Pressure regulator for vertical stacking

- standard ISO 5599-1

- Frame size ISO 1

- Controlled port 1, 2, 4, 2, 4



Working pressure min./max.

16 bar

Adjustment range min./max.

0,5 ... 12 bar

Ambient temperature min./max.

5 ... 50 °C

Medium

Compressed air

Max. particle size

5 µm

Oil content of compressed air

0 ... 5 mg/m³

Weight

See table below

The delivered product may vary from that in the illustration.

Technical data

Part No.		Frame size	Controlled port	Weight	Fig.	
0821302048		ISO 1	1	1,15 kg	Fig. 1	1)
0821302060		ISO 1	1	1,19 kg	Fig. 1	2)
0821302054		ISO 1	2	1,15 kg	Fig. 1	1)
0821302062		ISO 1	2	1,19 kg	Fig. 1	2)
0821302057		ISO 1	4	1,15 kg	Fig. 1	1)
0821302063		ISO 1	4	1,19 kg	Fig. 1	2)
0821302051		ISO 1	2, 4	1,57 kg	Fig. 2	1)
0821302061		ISO 1	2, 4	1,61 kg	Fig. 2	2)

Scope of delivery incl. seal and mounting screws, pressure regulator without gauge adapter, cannot be combined with IS12 ISO valves

1) with pressure gauge


2) with pressure gauge and adapter

Technical information

Material	
Housing	Zinc
Seals	Butadiene rubber

Dimensions

Fig. 1

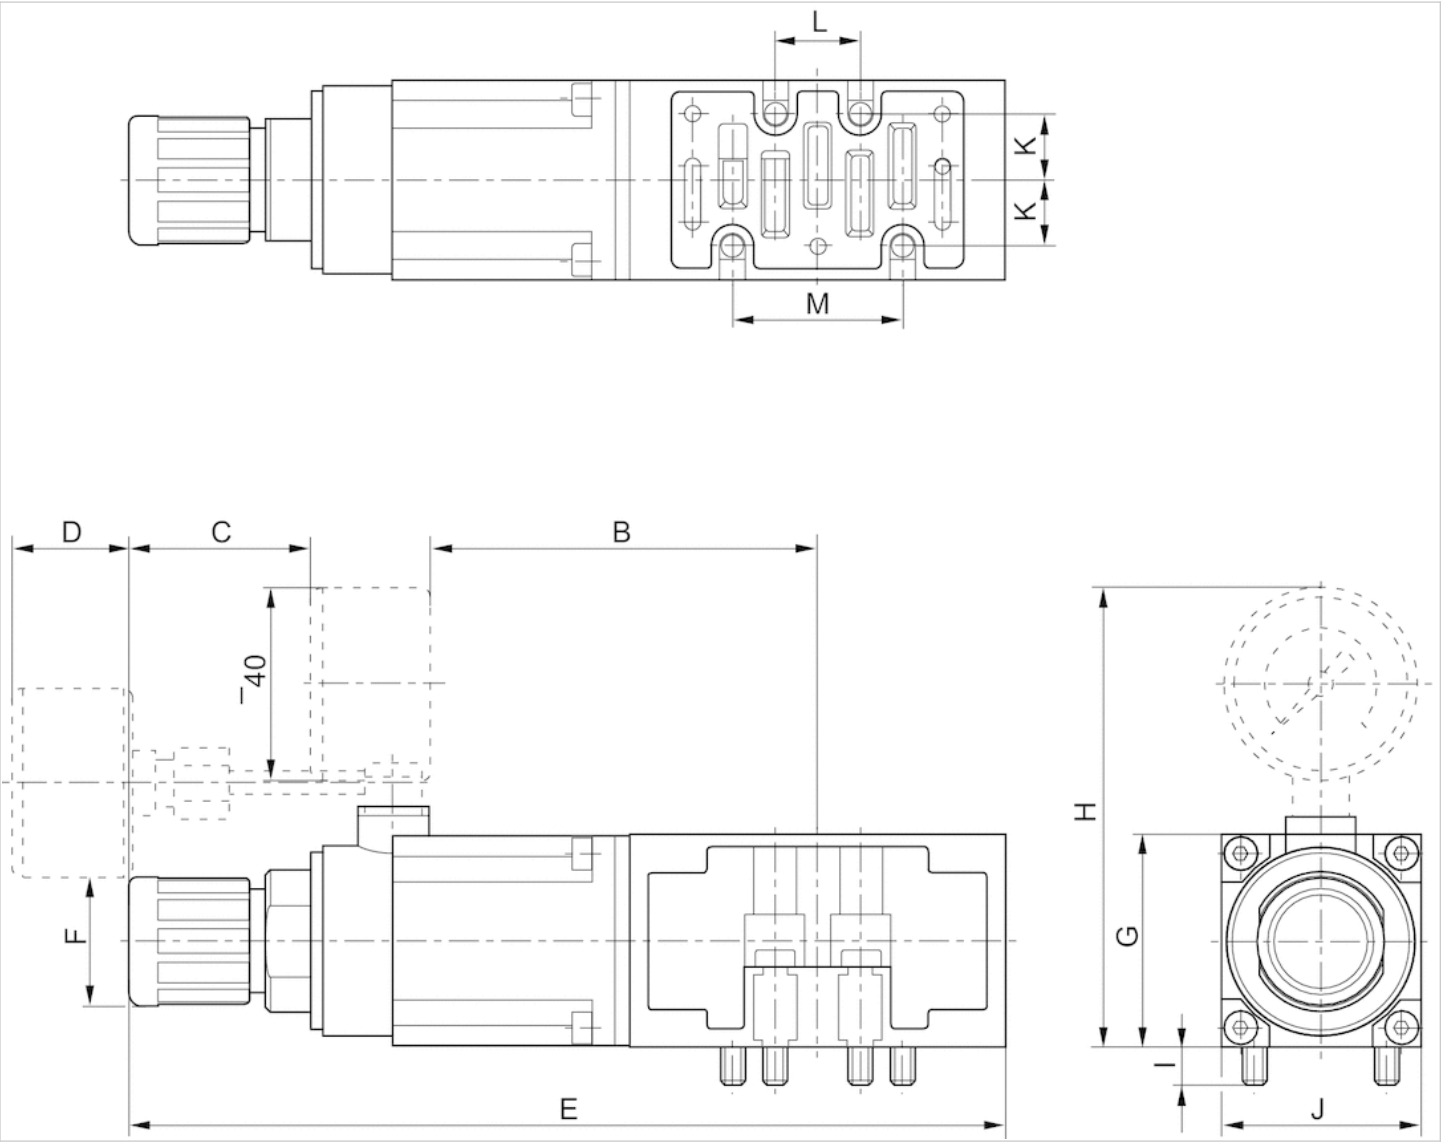


Dimensions

Part No.	B±5	C±5	D±5	E±7	Ø F	G±5	H±5	I±2.5	J±5	K±2.5	L±2.5	M±5
0821302048	82	38,6	—	186	27	45	97,5	8	42.5	14	18	36
0821302060	—	—	25	186	27	45	97,5	8	42.5	14	18	36
0821302054	82	38,5	—	199	27	45	97,5	8	42.5	14	18	36
0821302062	—	—	25	199	27	45	97,5	8	42.5	14	18	36


Dimensions

Fig. 2

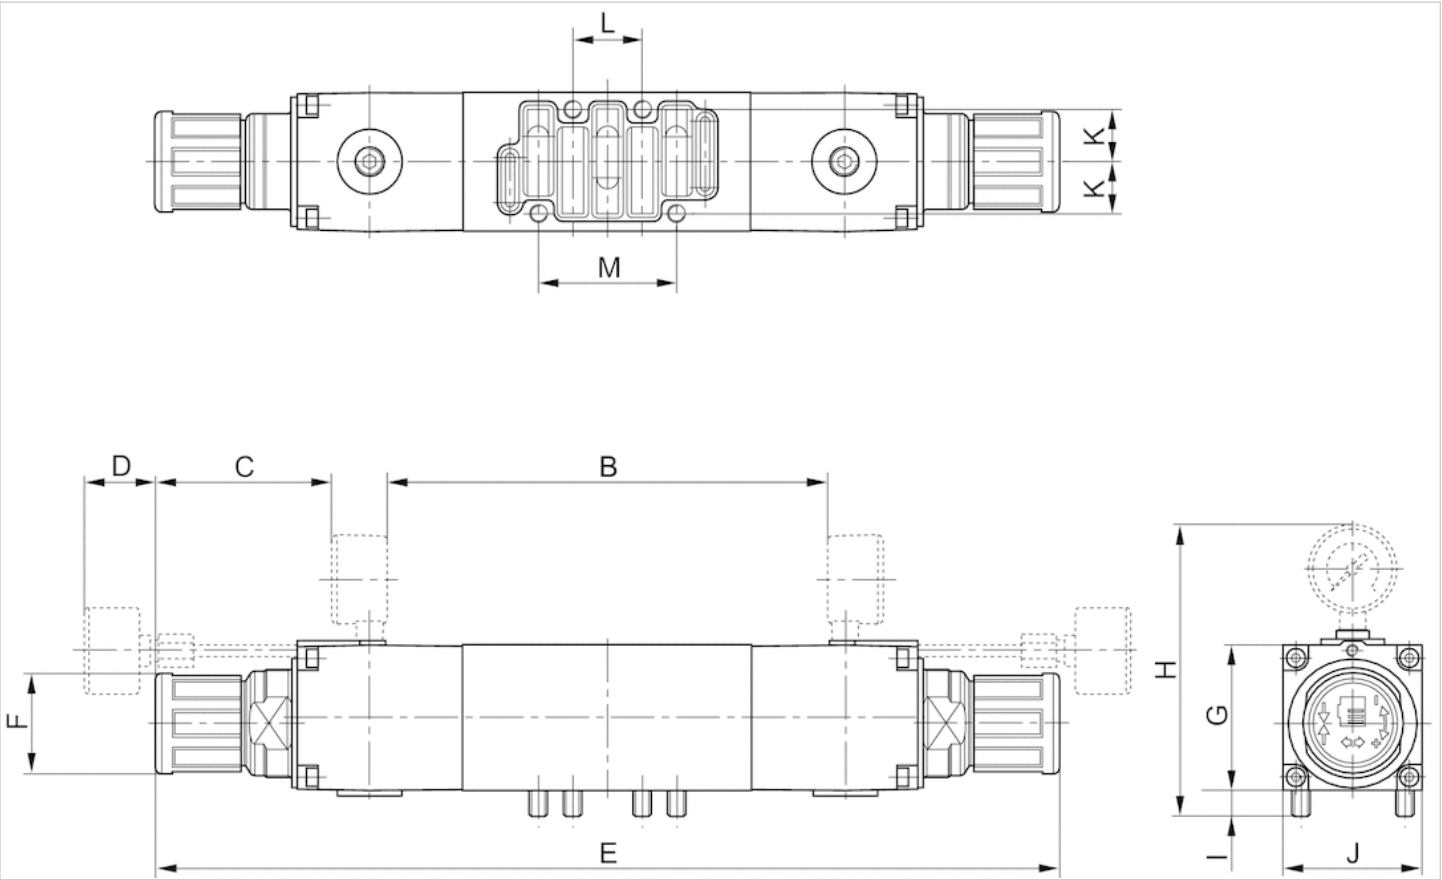

Dimensions


Part No.	B±5	C±5	D±5	E±7	Ø F	G±5	H±5	I±2.5	J±5	K±2.5	L±2.5	M±5
0821302051	164	38,6	—	292	27	45	96,5	8	42.5	14	18	36
0821302061	—	—	25	292	27	45	—	8	42.5	14	18	36

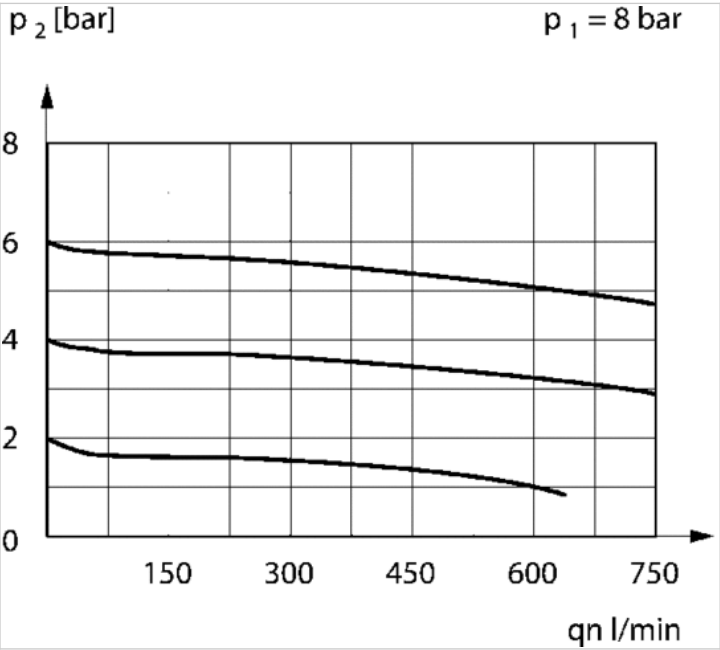

Controlled connection 2/4

Diagrams

Flow rate characteristic

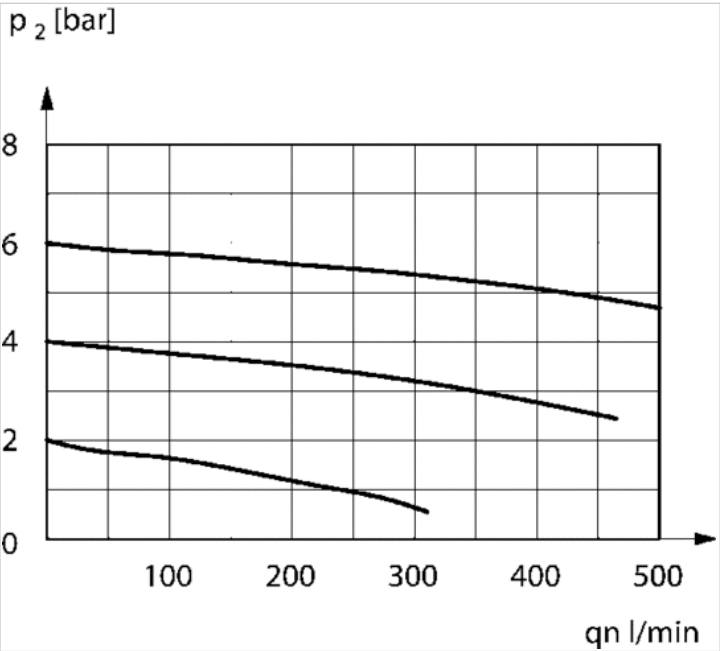

controlled connection 1
Controlled connection 2
Controlled connection 4

Round plug connector, Series CON-RD

- Socket, M12x1, 4-pin, A-coded, straight, 180°
- UL (Underwriters Laboratories)
- unshielded



Connection type	Screws
Ambient temperature min./max.	-40 ... 85 °C
Operational voltage	48 V, AC/DC
Protection class	IP67
Weight	0,015 kg

1	BN
2	WH
3	BU
4	BK

Technical data


Part No.	Max. current	suitable cable-Ø min./max
1834484177	4 A	4 / 6 mm

Technical information

Material	
Housing	Polyamide


Dimensions

Dimensions

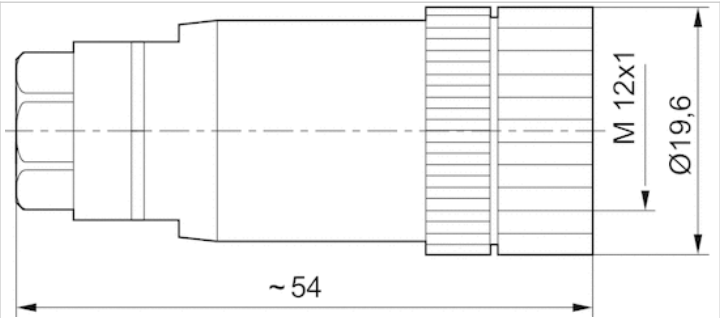

Pin assignments

Pin assignment socket



Round plug connector, Series CON-RD

- Socket, M12x1, 4-pin, A-coded, straight, 180°
- UL (Underwriters Laboratories)
- unshielded



Connection type	Screws
Ambient temperature min./max.	-25 ... 90 °C
Operationalvoltage	48 V, AC/DC
Protection class	IP67
Weight	0,029 kg
The delivered product may vary from that in the illustration.	

Technical data

Part No.	Max. current	suitable cable-Ø min./max
8941054324	4 A	4 mm

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Housing	Polybutyleneterephthalate
Seals	Fluorocarbon caoutchouc


Dimensions

Dimensions

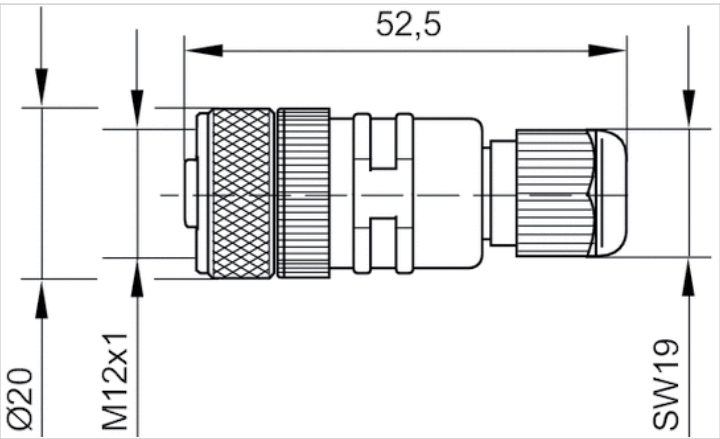

Pin assignments

Pin assignment socket



Round plug connector, Series CON-RD

- Socket, M12x1, 4-pin, A-coded, angled, 90°
- unshielded



Connection type	Screws
Ambient temperature min./max.	-40 ... 85 °C
Operationalvoltage	48 V, AC/DC
Protection class	IP67
Weight	0,016 kg

Technical data

Part No.	Max. current	suitable cable-Ø min./max
1834484178	4 A	4 mm

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Housing	Polyamide


Dimensions

Dimensions

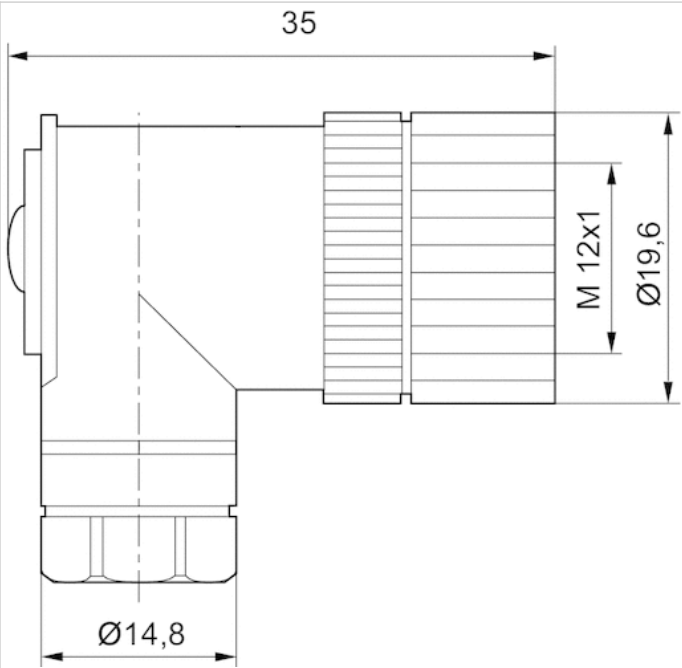

Pin assignments

Pin assignment socket



Round plug connector, Series CON-RD

- Socket, M12x1, 4-pin, A-coded, angled, 90°
- unshielded



Connection type	Screws
Ambient temperature min./max.	-25 ... 90 °C
Operationalvoltage	48 V, AC/DC
Protection class	IP67
Weight	0,027 kg

Technical data

Part No.	Max. current	suitable cable-Ø min./max
8941054424	4 A	4 mm

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Housing	Polybutyleneterephthalate
Seals	Fluorocarbon caoutchouc


Dimensions

Dimensions

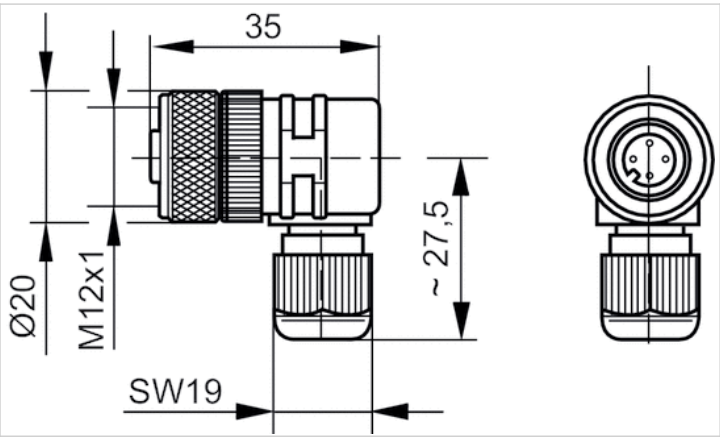


Pin assignments

Pin assignment socket



Round plug connector, Series CON-RD

- Socket, M12x1, 5-pin, A-coded, straight, 180°
- open cable ends
- with cable
- unshielded

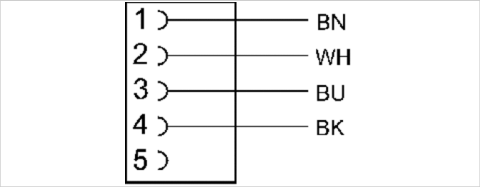

Ambient temperature min./max.	-25 ... 70 °C
Operationalvoltage	48 V, AC/DC
Protection class	IP67
Wire cross-section	0,34 mm²
Weight	See table below

Technical data

Part No.	Max. current	Number of wires	Cable-Ø	Cable length	Weight
1834484256	4 A	4	5,2 mm	3 m	0,122 kg
1834484257	4 A	4	5,2 mm	5 m	0,194 kg
1834484258	4 A	4	5,2 mm	10 m	0,373 kg

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Cable sheath	Polyurethane

Dimensions


Dimensions

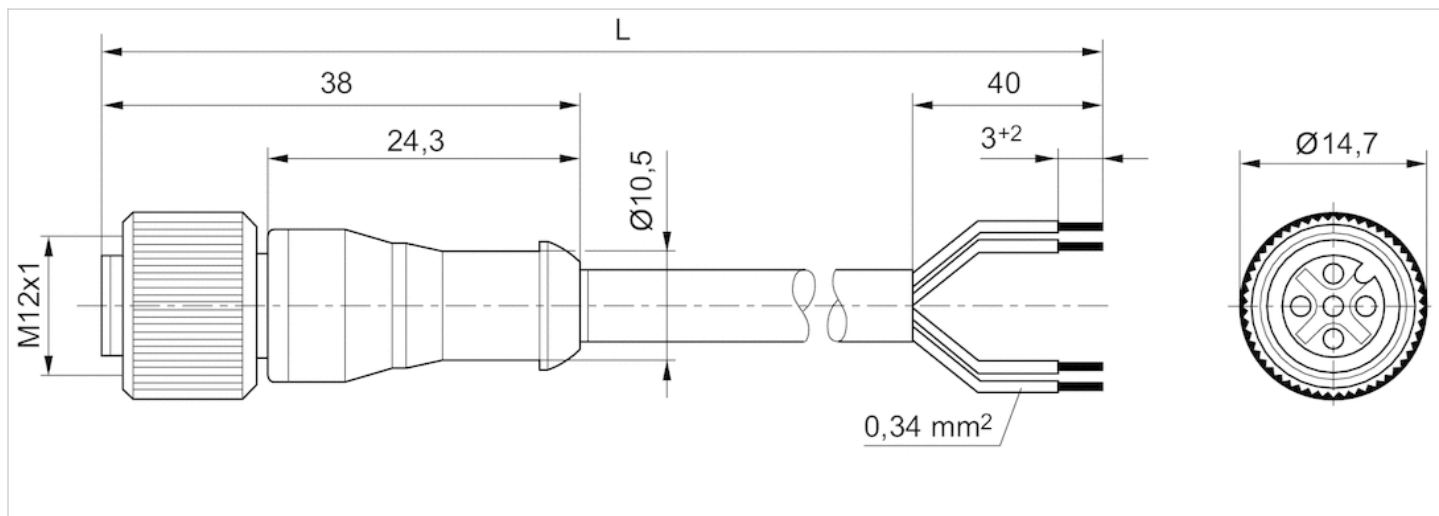

L = length

Pin assignments

Pin assignment socket




(1) BN=brown (2) WH=white (3) BU=blue (4) BK=black
(5) not assigned

Round plug connector, Series CON-RD

- Socket, M12x1, 5-pin, A-coded, angled, 90°
- open cable ends
- for DeviceNet
- with cable
- unshielded



Ambient temperature min./max.	-40 ... 85 °C
Operationalvoltage	48 V, AC/DC
Protection class	IP65
Wire cross-section	0,34 mm²
Weight	See table below

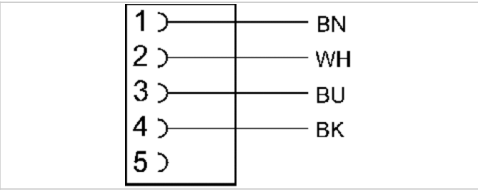

Technical data

Part No.	Max. current	Number of wires	Cable-Ø	Cable length	Weight
1834484259	4 A	4	5,2 mm	3 m	0,126 kg
1834484260	4 A	4	5,2 mm	5 m	0,195 kg
1834484261	4 A	4	5,2 mm	10 m	0,38 kg

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Cable sheath	Polyurethane

Dimensions


Dimensions

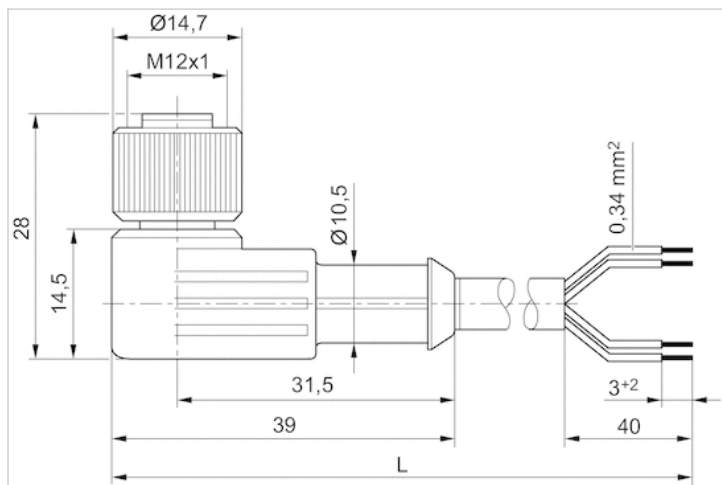

L = length

Pin assignments

Pin assignment socket




(1) BN=brown (2) WH=white (3) BU=blue (4) BK=black
(5) not assigned

Round plug connector, Series CON-RD

- Socket, M12x1, 4-pin, A-coded, straight, 180°
- Plug, straight, 180°
- with cable
- unshielded



Ambient temperature min./max.	-25 ... 70 °C
Protection class	IP69K
Weight	See table below

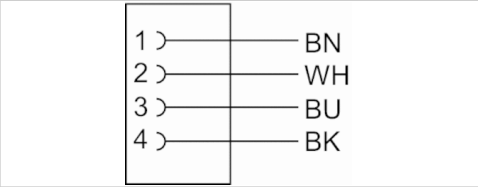

Technical data

Part No.	Max. current	Number of wires	Cable length	Weight
R402003760	4 A	4	5 m	0,258 kg
R402003761	4 A	4	10 m	0,484 kg
R402003762	4 A	4	15 m	0,721 kg

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Seals	Polyvinyl chloride
Cable sheath	Polyvinyl chloride


Dimensions

Dimensions

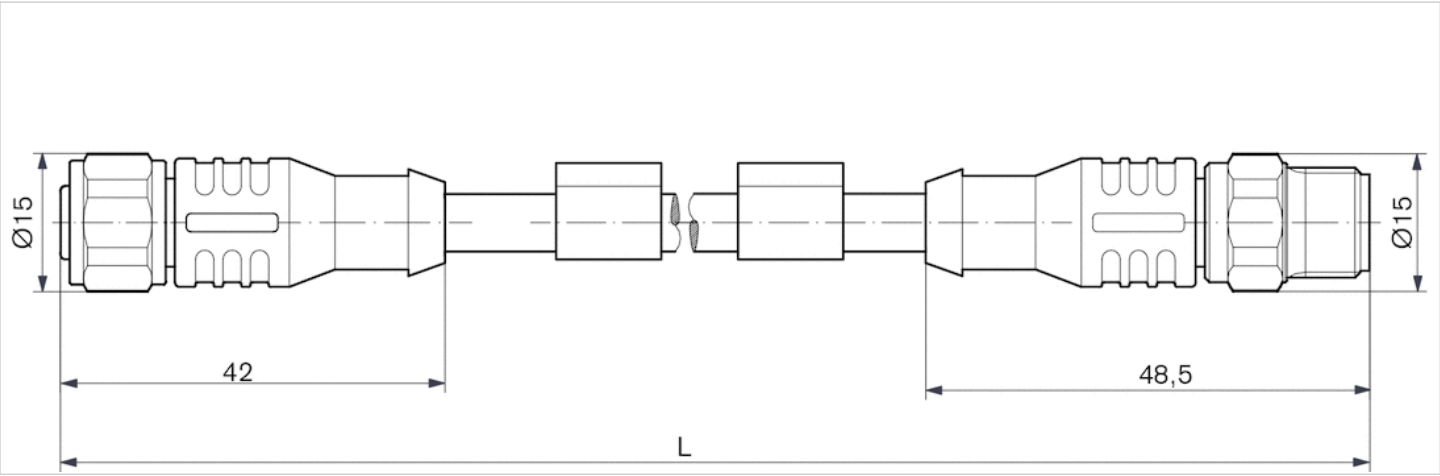


L = cable length

Pin assignment socket



Pin assignments

Plug pin assignment



Round plug connector, Series CON-RD

- Socket, M12x1, 5-pin, A-coded, straight, 180°
- Plug, angled, 90°
- with cable
- suitable for dynamic laying
- unshielded



Ambient temperature min./max.	-25 ... 85 °C
Operationalvoltage	48 V, AC/DC
Protection class	IP68
Wire cross-section	0,34 mm²
Mounting screw tightening torque	0,8 Nm
Weight	See table below

Technical data

Part No.	Max. current	Number of wires	Bending radius min.	Cable-Ø	Cable length	Weight
R412021694	4 A	5	50 mm	5 mm	2 m	0,114 kg
R412021695	4 A	5	50 mm	5 mm	5 m	0,217 kg

suitable for dynamic laying

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Housing	Polyurethane
Cable sheath	Polyurethane


Dimensions

Dimensions

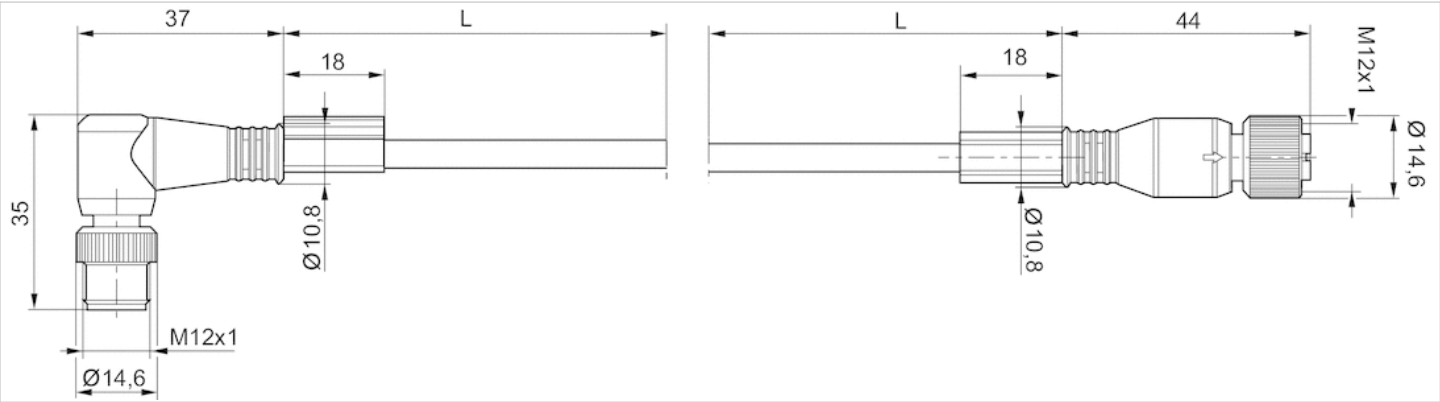


L = length

Pin assignment socket



Pin assignments

Plug pin assignment



Valve plug connector, series CON-VP

- Socket, form A, 2+E, angled, 90°, Socket, form A, 3+E, angled, 90°

- EN 175301-803

- unshielded

- with LED Yellow, Red, Green, green/red



Connection type

Ambient temperature min./max.

Operational voltage

Protection class

Mounting screw tightening torque

Weight

Screws

-40 ... 90 °C



See table below

IP65

0,4 Nm

See table below

Technical data

Part No.		Electrical connection	Operational voltage	Max. current
		1		
1834484048		Socket, form A, 2+E, angled, 90°	300 V, DC	10 A
1834484059		Socket, form A, 3+E, angled, 90°	300 V, DC	10 A
1834484101		Socket, form A, 2+E, angled, 90°	24 V, AC/DC	-
1834484102		Socket, form A, 2+E, angled, 90°	110 V, AC	-
1834484103		Socket, form A, 2+E, angled, 90°	230 V, AC	-
8941016112		Socket, form A, 2+E, angled, 90°	230 V, AC	-
8941012462		Socket, form A, 3+E, angled, 90°	24 V, DC	8 A

Part No.	Protective circuit	Contact assignment	LED status display	suitable cable-Ø min./max
1834484048	-	2+E	-	6 / 8 mm
1834484059	-	3+E	-	6 / 8 mm
1834484101	Z-diode	2+E	Yellow	6 / 8 mm
1834484102	Varistor	2+E	Red	6 / 8 mm
1834484103	Varistor	2+E	Red	6 / 8 mm
8941016112	Varistor	2+E	Green	6 / 10 mm
8941012462	-	3+E	green/red	4,5 / 11 mm

Part No.	Seal	Weight	
1834484048	caoutchouc/butadiene caoutchouc	0,03 kg	1)
1834484059	caoutchouc/butadiene caoutchouc	0,03 kg	1)
1834484101	Silicone caoutchouc	0,03 kg	2)
1834484102	caoutchouc/butadiene caoutchouc	0,03 kg	1)
1834484103	Silicone caoutchouc	0,025 kg	1)
8941016112	caoutchouc/butadiene caoutchouc	0,03 kg	1)
8941012462	caoutchouc/butadiene caoutchouc	0,03 kg	-

- 1) Profile seal
- 2) Flat gasket

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Seals	caoutchouc/butadiene caoutchouc, Silicone caoutchouc

Dimensions

Dimensions

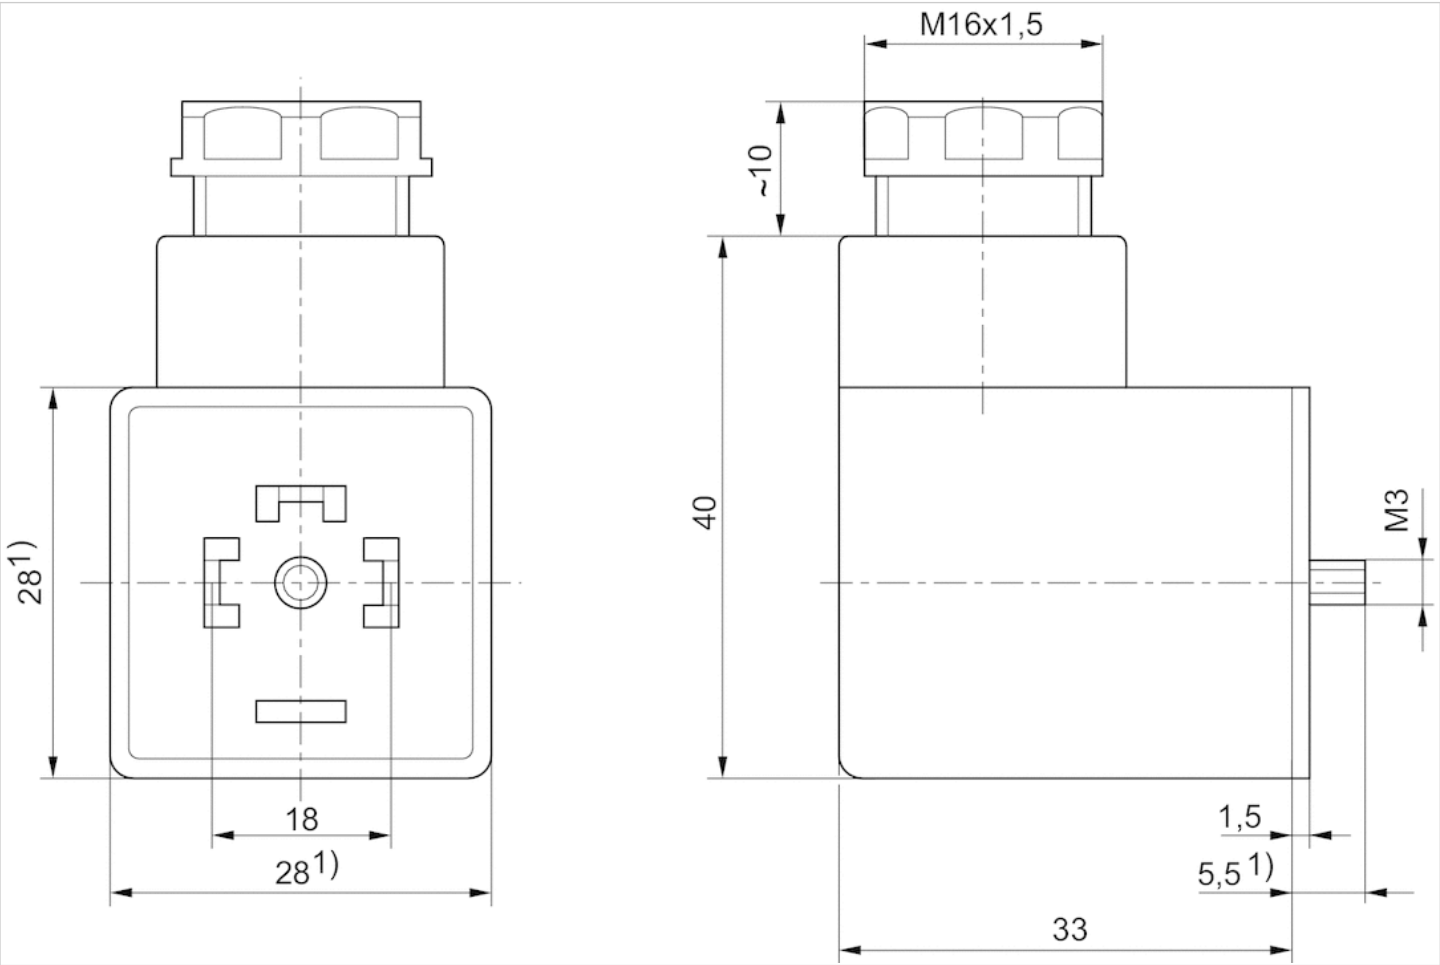

1) Max.

Valve plug connector, series CON-VP

- Socket, form A, 2+E, angled, 90°
- open cable ends, 3-pin
- with cable
- unshielded



Ambient temperature min./max.	-20 ... 80 °C
Operationalvoltage	See table below
Protection class	IP67
Wire cross-section	0,75 mm²
Mounting screw tightening torque	0,4 Nm
Weight	See table below

Technical data

Part No.		Operationalvoltage	Protective circuit	Contact assignment	LED status display
1834484160		230 V, AC/DC	-	2+E	-
1834484162		24 V, AC/DC	Z-diode	2+E	Yellow
1834484163		24 V, AC/DC	Z-diode	2+E	Yellow
1834484164		230 V, AC/DC	Varistor	2+E	Red
1834484165		230 V, AC/DC	Varistor	2+E	Red

Part No.	Number of wires	Cable-Ø	Cable length	Weight	Fig.	
1834484160	3	5,9 mm	3 m	0,2 kg	Fig. 1	1)
1834484162	3	5,9 mm	3 m	0,2 kg	Fig. 2	-
1834484163	3	5,9 mm	5 m	0,31 kg	Fig. 2	-
1834484164	3	5,9 mm	3 m	0,2 kg	Fig. 2	-
1834484165	3	5,9 mm	5 m	0,31 kg	Fig. 2	-

1) Scope of delivery incl. flat gasket


Technical information

The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Seals	caoutchouc/butadiene caoutchouc
Cable sheath	Polyvinyl chloride

Fig. 2

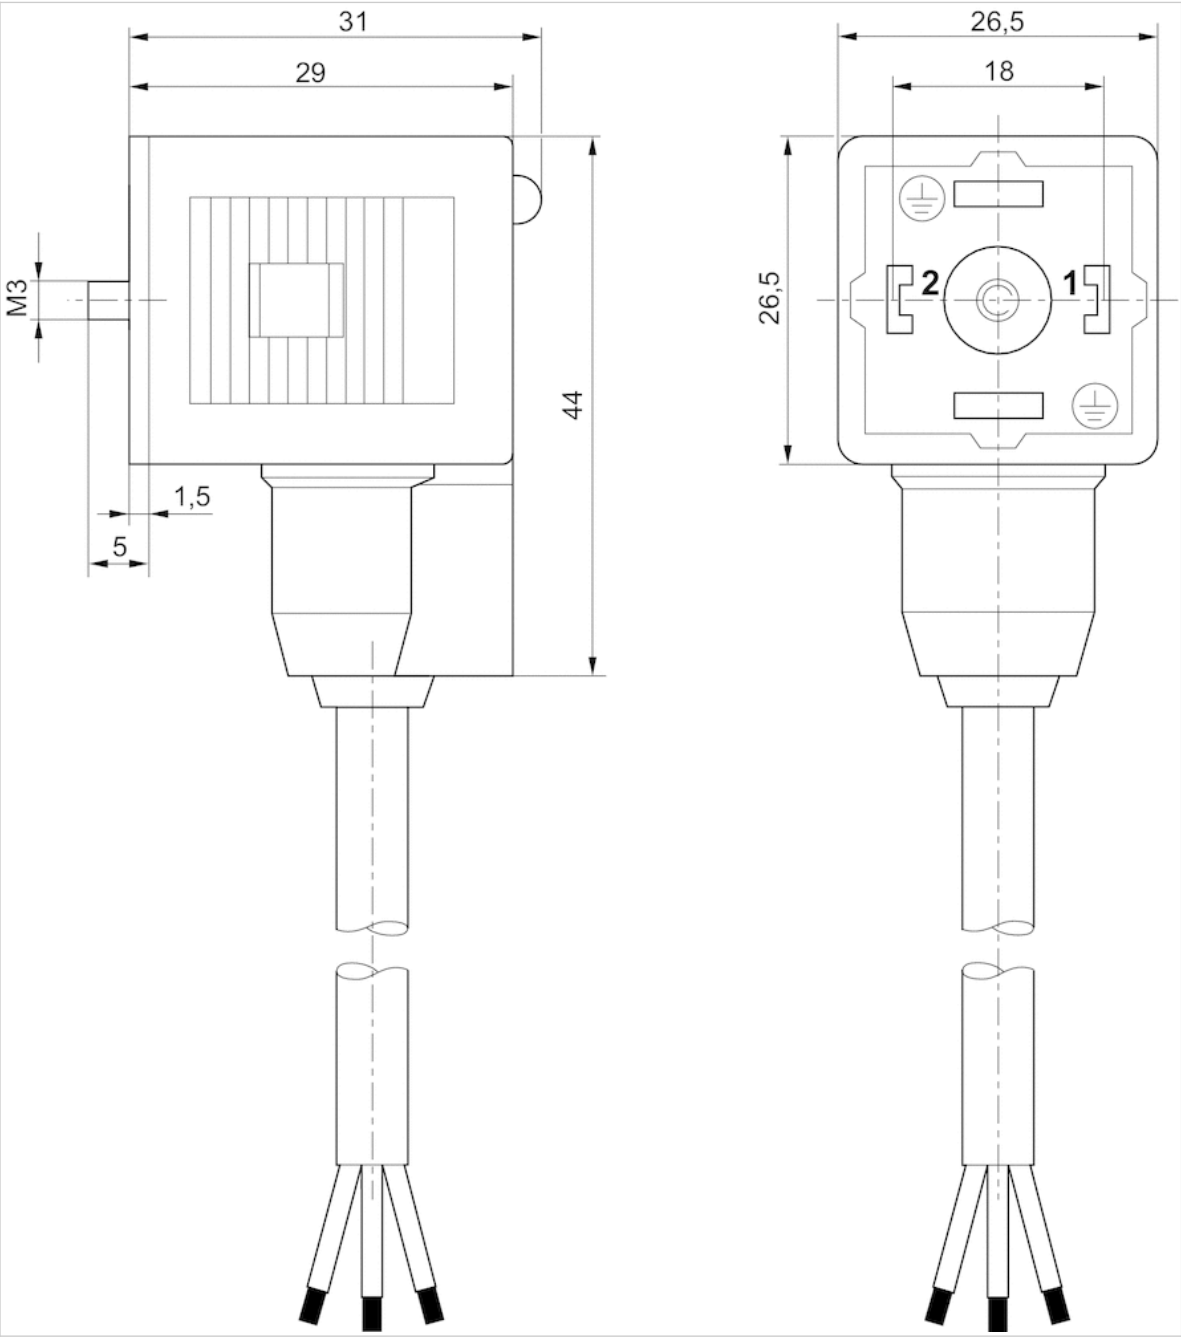

Dimensions

Fig. 1

