


Filter, Series AS2-FLS

- G 1/4 G 3/8
- filter porosity 5 µm
- suitable for ATEX

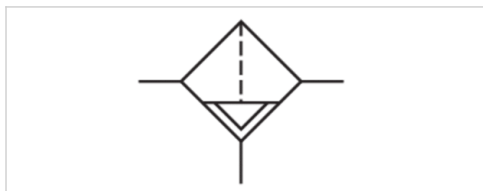

Type	Standard filter, Can be assembled into blocks
Parts	Filter
Mounting orientation	vertical
Certificates	suitable for ATEX
Working pressure min./max.	See table below
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 50 °C
Medium	Compressed air Neutral gases
Filter reservoir volume	28 cm ³
Filter element	exchangeable
filter porosity	5 µm
Condensate drain	See table below
Weight	See table below

Technical data

Part No.	Port	Flow Qn	Working pressure min./max.
R412006000	G 1/4	2100 l/min	1,5 ... 16 bar
R412006006	G 1/4	2100 l/min	1,5 ... 16 bar
R412006001	G 1/4	2100 l/min	1,5 ... 16 bar
R412006002	G 1/4	2100 l/min	1,5 ... 16 bar
R412006007	G 1/4	2100 l/min	1,5 ... 16 bar
R412006008	G 1/4	2100 l/min	1,5 ... 16 bar
R412006090	G 1/4	2100 l/min	0 ... 16 bar
R412006009	G 3/8	2100 l/min	1,5 ... 16 bar
R412006015	G 3/8	2100 l/min	1,5 ... 16 bar
R412006010	G 3/8	2100 l/min	1,5 ... 16 bar
R412006011	G 3/8	2100 l/min	1,5 ... 16 bar
R412006016	G 3/8	2100 l/min	1,5 ... 16 bar
R412006017	G 3/8	2100 l/min	1,5 ... 16 bar

Part No.	Condensate drain
R412006000	semi-automatic, open without pressure
R412006006	semi-automatic, open without pressure
R412006001	fully automatic, open without pressure
R412006002	fully automatic, closed without pressure
R412006007	fully automatic, open without pressure
R412006008	fully automatic, closed without pressure

Part No.	Condensate drain
R412006090	without
R412006009	semi-automatic, open without pressure
R412006015	semi-automatic, open without pressure
R412006010	fully automatic, open without pressure
R412006011	fully automatic, closed without pressure
R412006016	fully automatic, open without pressure
R412006017	fully automatic, closed without pressure

Part No.	Version	Weight	Fig.
R412006000	reservoir, polycarbonate, with PA protective guard	0,212 kg	Fig. 1
R412006006	-	0,443 kg	Fig. 1
R412006001	reservoir, polycarbonate, with PA protective guard	0,255 kg	Fig. 2
R412006002	reservoir, polycarbonate, with PA protective guard	0,255 kg	Fig. 2
R412006007	-	0,52 kg	Fig. 2
R412006008	-	0,53 kg	Fig. 2
R412006090	-	0,212 kg	Fig. 3
R412006009	reservoir, polycarbonate, with PA protective guard	0,212 kg	Fig. 4
R412006015	-	0,43 kg	Fig. 4
R412006010	reservoir, polycarbonate, with PA protective guard	0,255 kg	Fig. 5
R412006011	reservoir, polycarbonate, with PA protective guard	0,255 kg	Fig. 5
R412006016	-	0,52 kg	Fig. 5
R412006017	-	0,51 kg	Fig. 5

Nominal flow Q_n with secondary pressure $p_2 = 6$ bar at $\Delta p = 1$ bar

Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Note: Polycarbonate reservoirs are susceptible to solvents, supplementary information can be found at "Customer information".

Suitable for use in Ex zones 1, 2, 21, 22.

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.

Also suitable for separation of fluid oil or water due to the design.


Max. achievable compressed air class acc. to ISO 8573-1:2010 6 : 7 : -

Technical information

Material	
Housing	Polyamide
Front plate	Acrylonitrile butadiene styrene
Seals	Acrylonitrile butadiene rubber
Threaded bushing	Die cast zinc
Reservoir	Polycarbonate Die cast zinc
Protective guard	Polyamide
Filter insert	Polyethylene

Dimensions

Dimensions in mm, Fig. 1

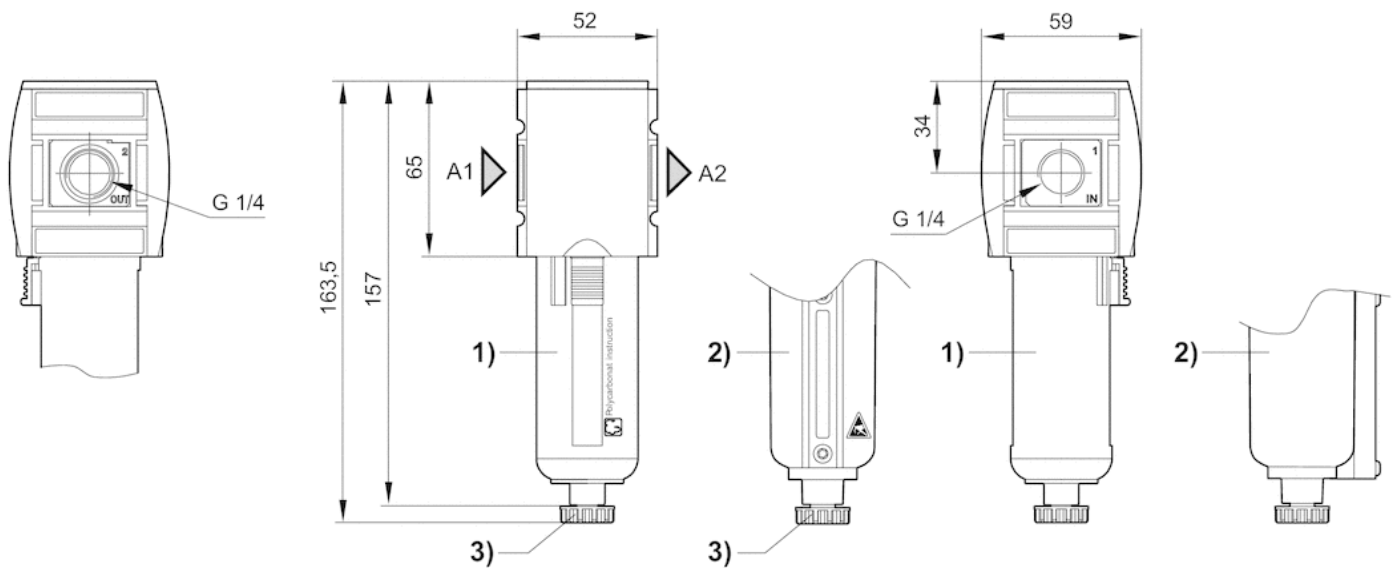

A1 = input


A2 = output

1) Plastic reservoir and protective guard with window

2) Metal reservoir with level indicator


3) Semi-automatic condensate drain

Dimensions in mm, Fig. 2

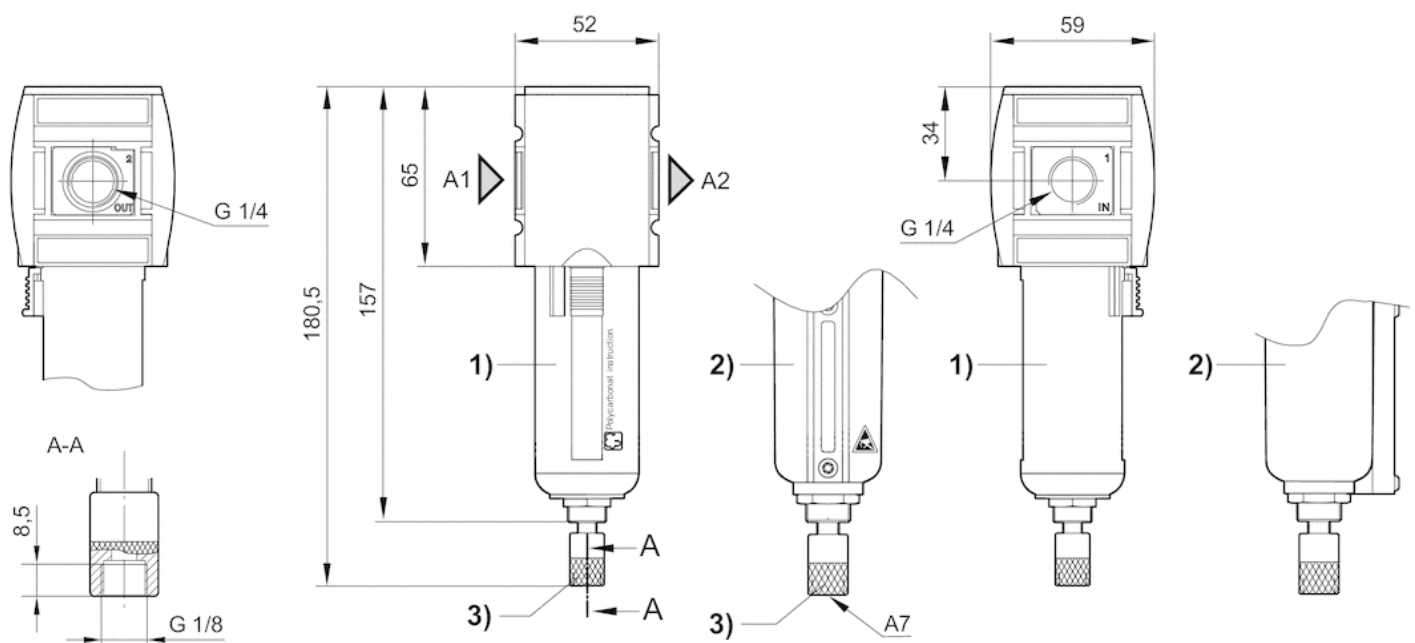

- A1 = input
A2 = output
A7 = condensate drain
1) Plastic reservoir and protective guard with window
2) Metal reservoir with level indicator
3) Fully automatic condensate drain

Dimensions in mm, Fig. 3

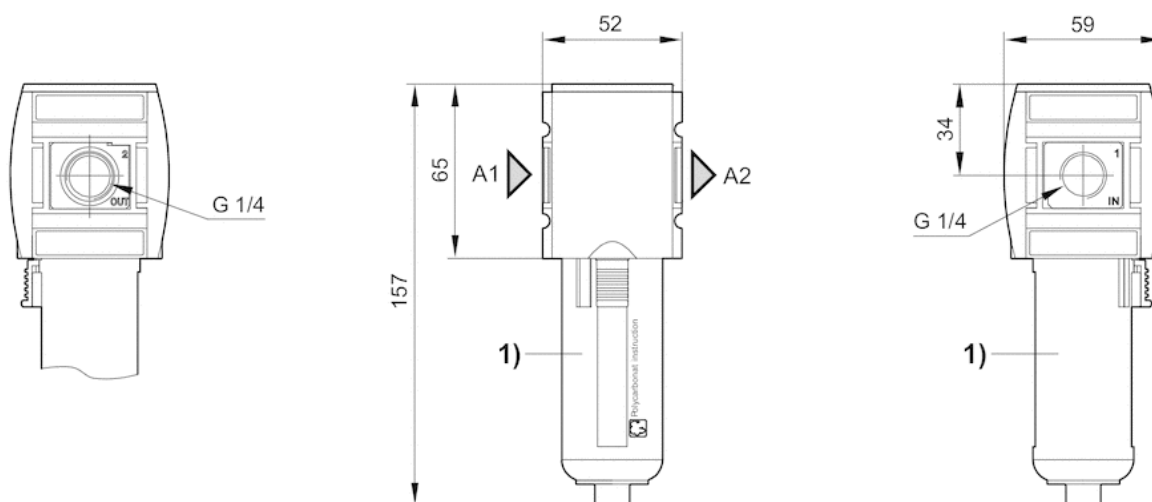


A1 = input

A2 = output

1) Plastic reservoir and protective guard with window

Dimensions in mm, Fig. 4

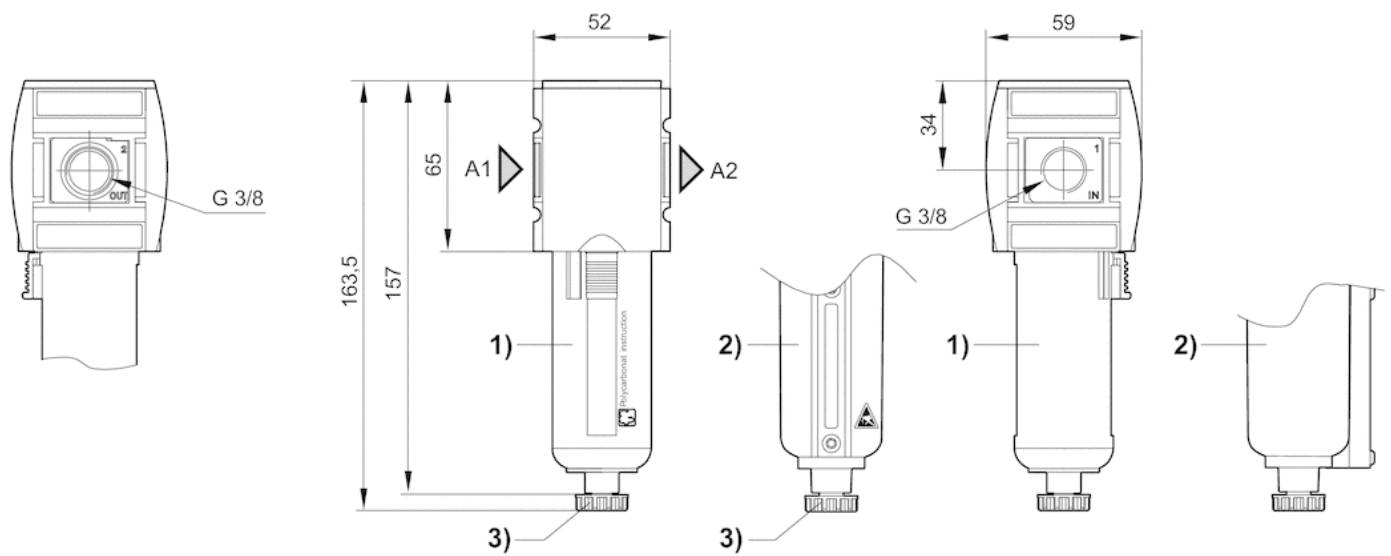

A1 = input


A2 = output

1) Plastic reservoir and protective guard with window

2) Metal reservoir with level indicator

3) Semi-automatic condensate drain

Dimensions in mm, Fig. 5

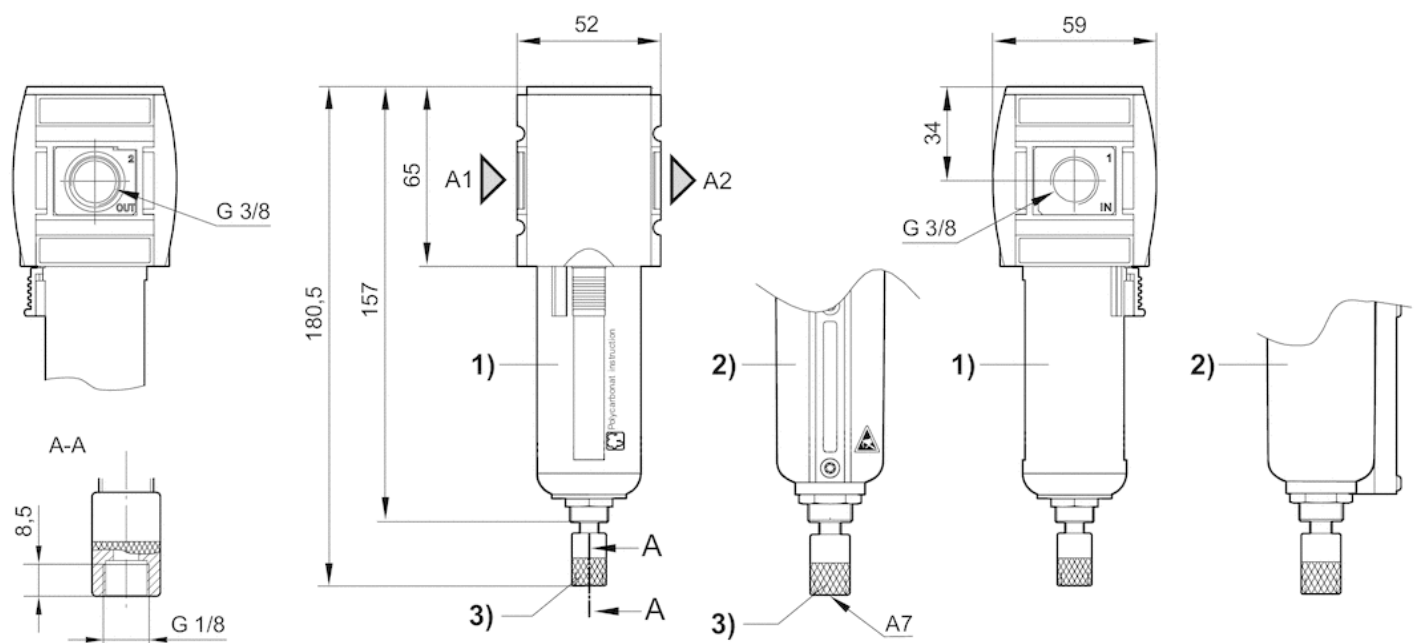

A1 = input

A2 = output

A7 = condensate drain


1) Plastic reservoir and protective guard with window

2) Metal reservoir with level indicator

3) Fully automatic condensate drain


Diagrams

Flow rate characteristic

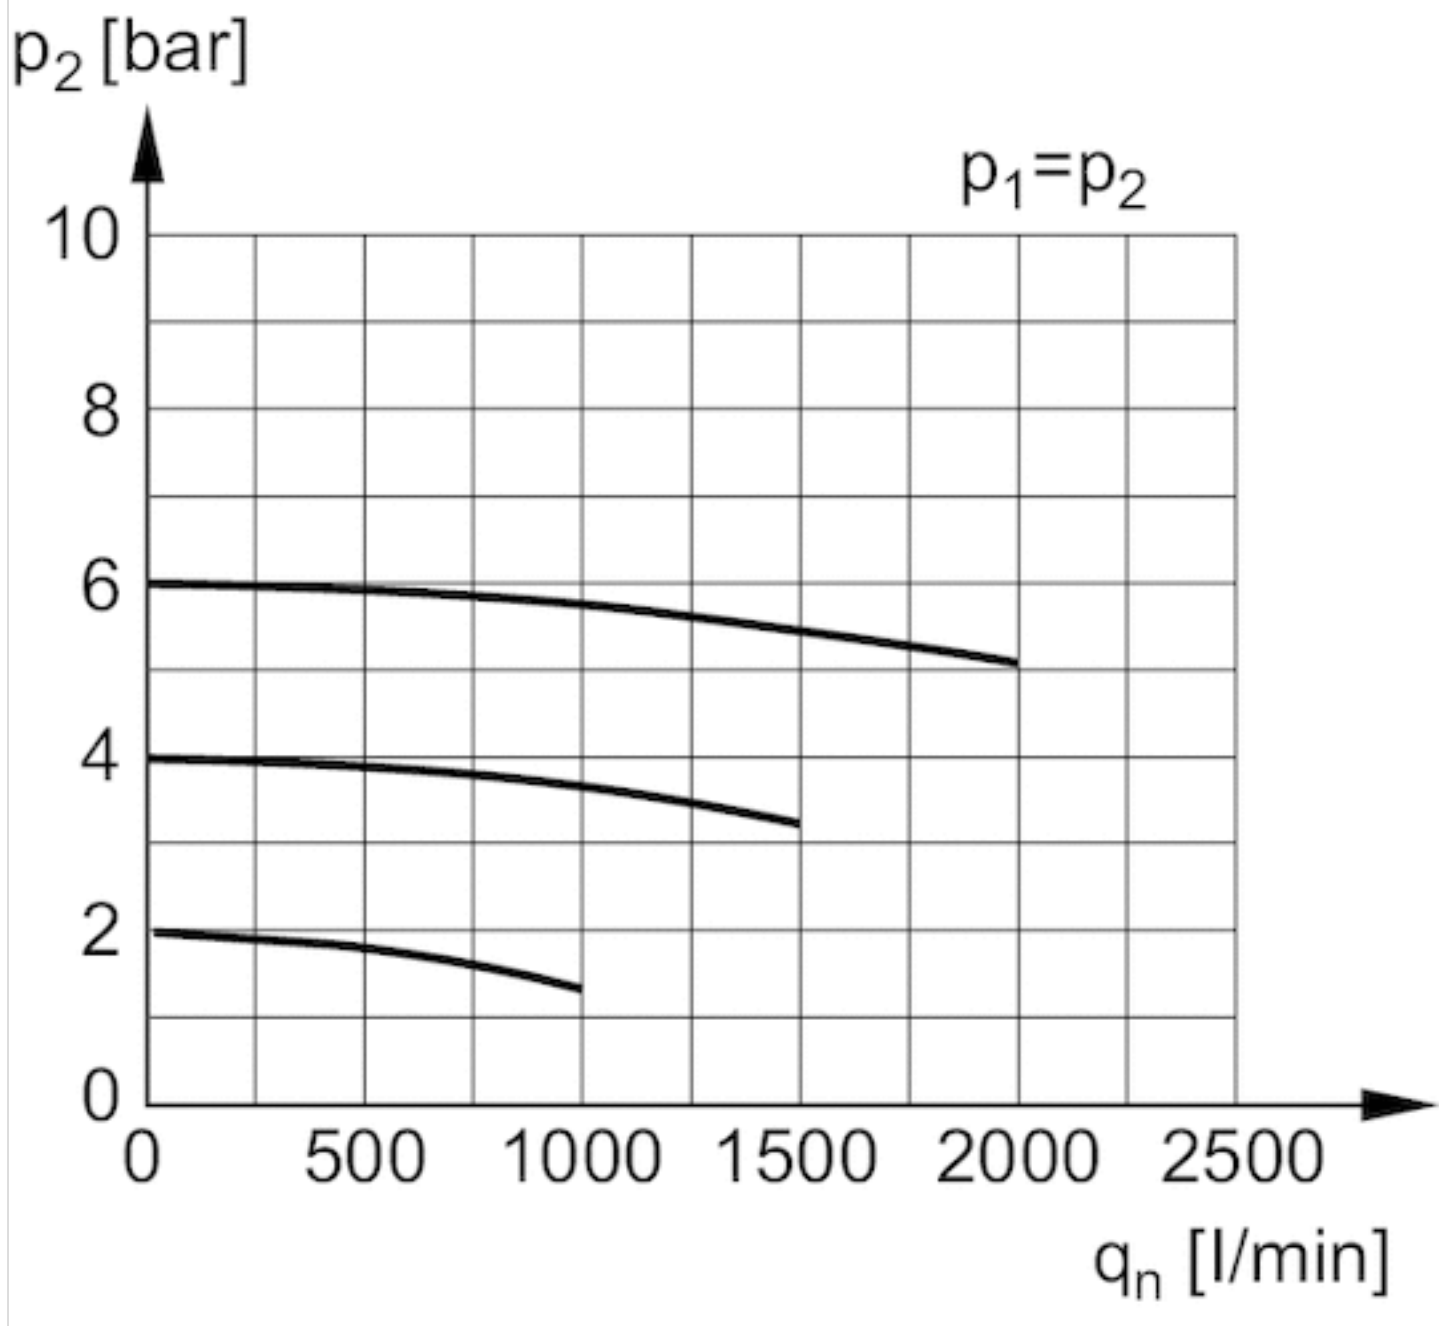

p1 = Working pressure
p2 = Secondary pressure
qn = Nominal flow

Accessories overview

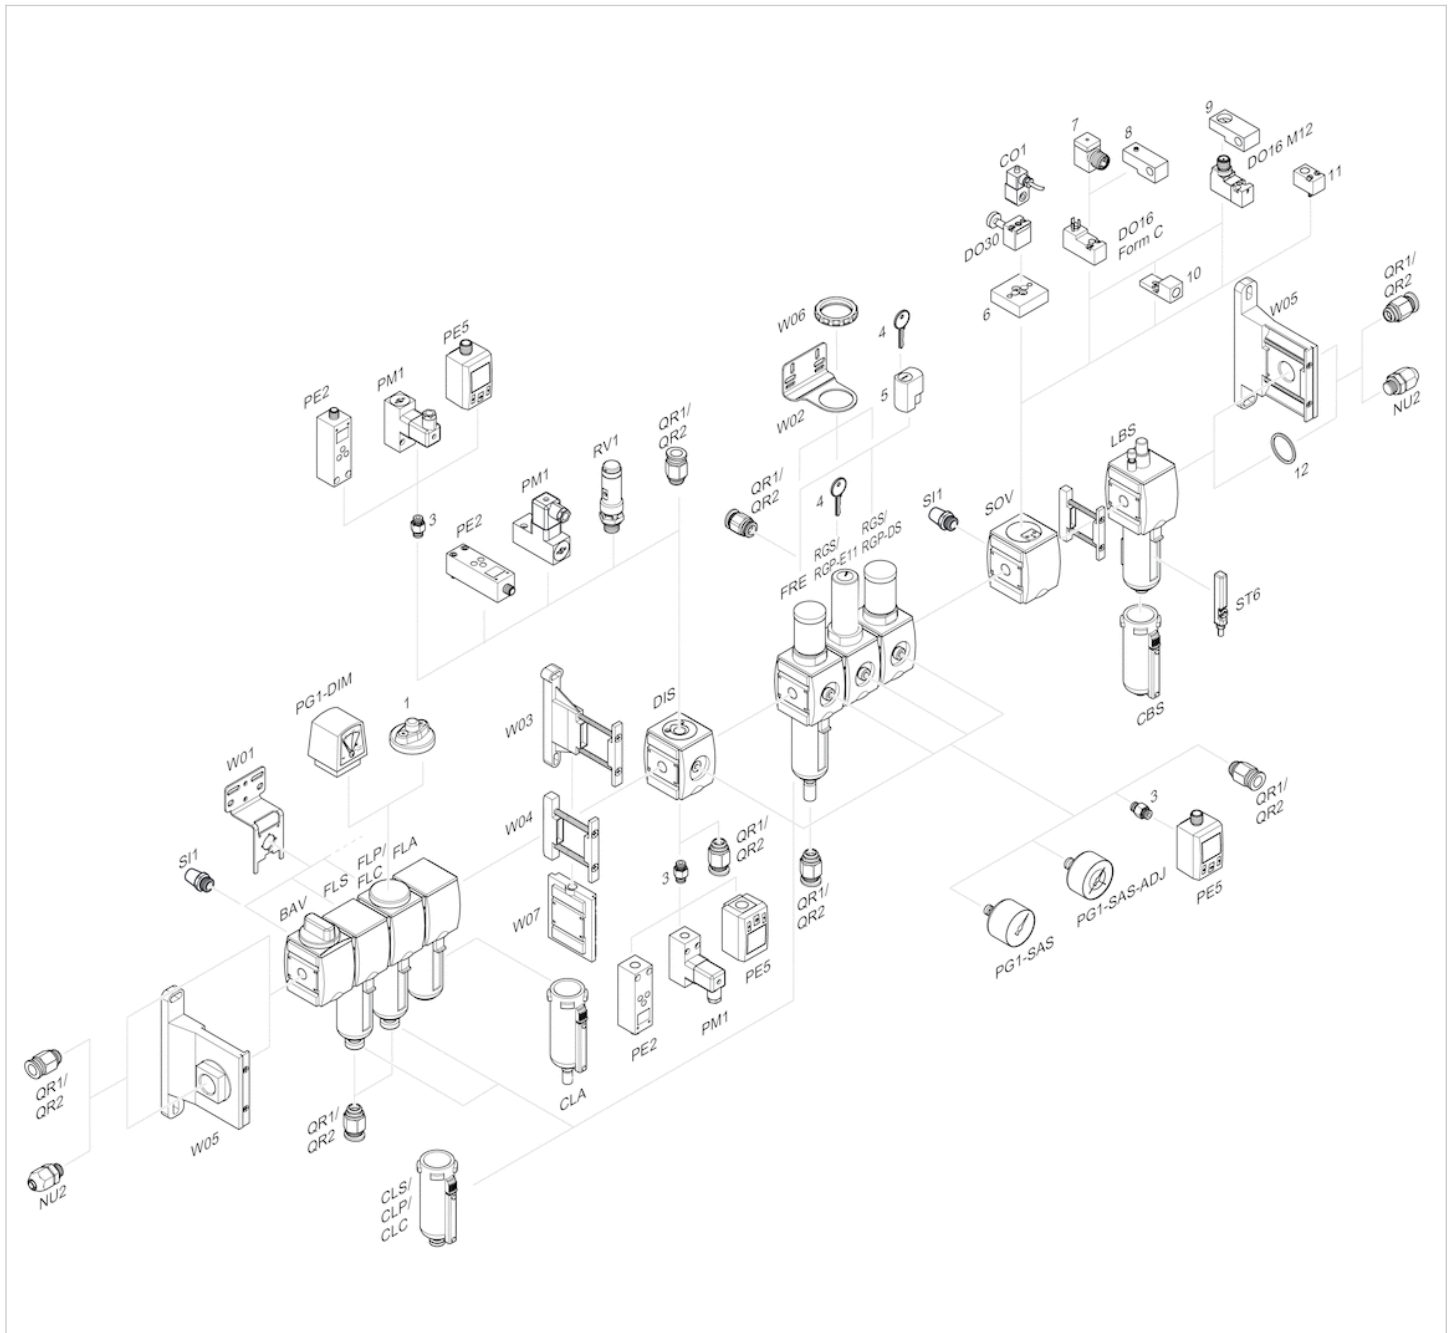

- 1 = contamination display
- 3 = Double nipple
- 4 = Key for E11 locking
- 5 = mortise lock
- 6 = Transition plate DO30
- 7 = Adapter, Series CON-VP
- 8 = Mounting aid DO16, form C
- 9 = Mounting aid DO16, M12
- 10 = Adapter for external pilot air
- 11 = Adapter pneumatic operation
- 12 = Sealing ring

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™