

Reservoir, Series NLC-CLS-PNB-HO

- for universal air preparation unit
- Material Polycarbonate



Type Reservoir

Mounting orientation vertical

Working pressure min./max. 1,5 ... 16 bar

Ambient temperature min./max. -10 ... 50 °C

Medium temperature min./max. -10 ... 50 °C

Medium Compressed air

Technical data

Part No.	Condensate drain	Filter reservoir volume
R412010833	semi-automatic, open without pressure	400 cm ³
R412010834	semi-automatic, open without pressure	1300 cm³

Technical information


Material		
Reservoir	Polycarbonate	
Seal	Acrylonitrile butadiene rubber	





Dimensions

Dimensions

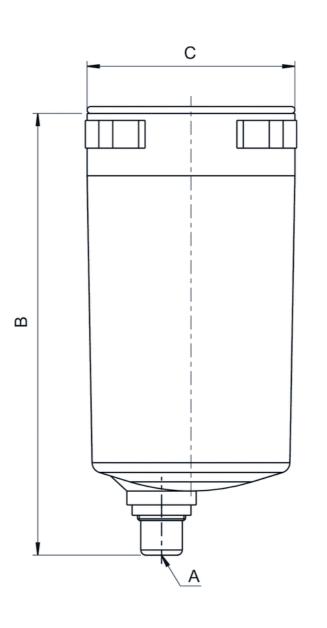

Dimensions in mm

Part No.	A	В	С
R412010833	G 1/8	128	60
R412010834	G 1/8	165	84

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: Emerson.com/Aventics

Your local contact: Emerson.com/contactus



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and again.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners.

2020 Emerson Electric Co. All rights reserved.

