

Compact cylinder ISO 21287, Series CCI

- ISO 21287
- Ø 16-100 mm
- Ports M5 G 1/8
- Single-acting, retracted without pressure
- with magnetic piston
- Cushioning elastic
- Piston rod External thread



Standards

Compressed air connection

Ambient temperature min./max.

Medium temperature min./max.

Medium

Max. particle size

Oil content of compressed air

Pressure for determining piston forces

ISO 21287

Internal thread

-20 ... 80 °C

-20 ... 80 °C

Compressed air

50 µm

0 ... 5 mg/m³

6.3 bar



Technical data

Piston Ø Piston rod thread Ports Piston rod Ø	16 mm M6x1 M5 8 mm	20 mm M8x1,25 M5 10 mm	25 mm M8x1,25 M5 10 mm	32 mm M10x1,25 G 1/8 12 mm	40 mm M10x1,25 G 1/8 12 mm	50 mm M12x1,25 G 1/8 16 mm
Stroke 5	R422001442	R422001443	R422001444	R422001445	R422001446	R422001447
10	R422001452	R422001453	R422001454	R422001455	R422001456	R422001457
15	R422001462	R422001463	R422001464	R422001465	R422001466	R422001467
20	R422001472	R422001473	R422001474	R422001475	R422001476	R422001477
25	R422001482	R422001483	R422001484	R422001485	R422001486	R422001487

Piston Ø Piston rod thread Ports Piston rod Ø	63 mm M12x1,25 G 1/8 16 mm	80 mm M16x1,5 G 1/8 20 mm	100 mm M16x1,5 G 1/8 25 mm
Stroke 5	R422001448	R422001449	R422001450
10	R422001458	R422001459	R422001460
15	R422001468	R422001469	R422001470
20	R422001478	R422001479	R422001480

Piston Ø Piston rod thread Ports Piston rod Ø	63 mm M12x1,25 G 1/8 16 mm	80 mm M16x1,5 G 1/8 20 mm	100 mm M16x1,5 G 1/8 25 mm
25	R422001488	R422001489	R422001490

Technical data

Piston Ø	16 mm	20 mm	25 mm	32 mm
Retracting piston force	12 N	13 N	25 N	35 N
Extracting piston force	115 N	185 N	284 N	472 N
Impact energy	0,11 J	0,15 J	0,2 J	0,4 J
Weight 0 mm stroke	0,066 kg	0,127 kg	0,152 kg	0,26 kg
Weight +10 mm stroke	0,016 kg	0,023 kg	0,026 kg	0,043 kg
Working pressure min./max.	2 ... 10 bar	2 ... 10 bar	2 ... 10 bar	2 ... 10 bar
Stroke max.	25 mm	25 mm	25 mm	25 mm

Piston Ø	40 mm	50 mm	63 mm	80 mm
Retracting piston force	43 N	82 N	82 N	105 N
Extracting piston force	749 N	1155 N	1882 N	3062 N
Impact energy	0,52 J	0,64 J	0,75 J	0,75 J
Weight 0 mm stroke	0,332 kg	0,501 kg	0,742 kg	1,22 kg
Weight +10 mm stroke	0,052 kg	0,07 kg	0,087 kg	0,116 kg
Working pressure min./max.	2 ... 10 bar	2 ... 10 bar	2 ... 10 bar	2 ... 10 bar
Stroke max.	25 mm	25 mm	25 mm	25 mm

Piston Ø	100 mm
Retracting piston force	215 N
Extracting piston force	4733 N
Impact energy	1 J
Weight 0 mm stroke	2,28 kg
Weight +10 mm stroke	0,168 kg
Working pressure min./max.	2 ... 10 bar
Stroke max.	25 mm

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

With cylinders with external thread extension, dimension "A" is increased by the value of the thread extension.

With cylinders with a piston rod extension, dimensions "WH" and "ZB" are increased by the value of the piston rod extension.

Technical information



Material	
Cylinder tube	Aluminum, anodized
Piston rod	Stainless steel
Front cover	Aluminum
End cover	Aluminum
Seal	Polyurethane
Nut for cylinder mounting	Steel, galvanized
Scraper	Polyurethane

Piston Ø	A	BG	DA H11	DT	E	EE	KK	KV	KW	LA	LB	LE	LJ	MM f8	PL	RR
63 mm	22	17	18	11	80	G 1/8	M12x1,25	19	6	2.5	5	7.5	14.8	16	12	6.7
80 mm	28	20	23	15	96	G 1/8	M16x1,5	24	8	3	5	7.5	22	20	14	8.5
100 mm	28	20	28	15	116	G 1/8	M16x1,5	24	8	3	5	7.5	27	25	16.5	8.5

Piston Ø	RT 6H	SW	TG	WH	X1	X2	X3	ZA	ZB
16 mm	M4	7	18	4,8 ±0,9	–	–	–	34,9 ±0,1	39,7 ±0,8
20 mm	M5	8	22	5,6 ±0,9	4.2	–	–	37,3 ±0,1	43,6 ±0,8
25 mm	M5	8	26	5,6 ±0,9	4.5	–	–	39 ±0,1	44,5 ±0,9
32 mm	M6	10	32.5	7,4 ±0,9	6.5	–	–	44 ±0,1	51,4 ±1
40 mm	M6	10	38	7,4 ±0,9	11	–	–	45 ±0,1	52,4 ±1
50 mm	M8	13	46.5	8,4 ±0,9	13	4	13	45,5 ±0,1	53,6 ±1
63 mm	M8	13	56.5	8,5 ±0,9	18	12	21	49 ±0,1	57,4 ±1
80 mm	M10	16	72	9,8 ±1	18	16.5	25.5	54,7 ±0,1	64,4 ±1
100 mm	M10	21	89	9,8 ±1	20	20	29	67 ±0,1	76,7 ±1


Diagrams

Extracting piston force

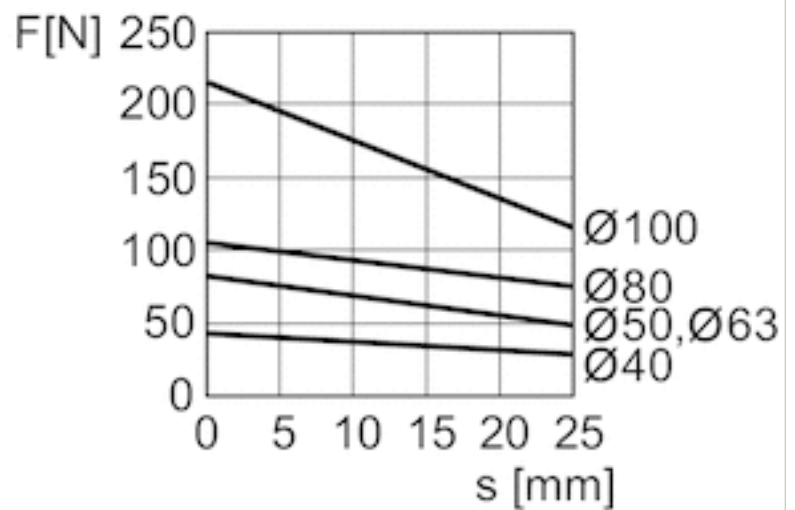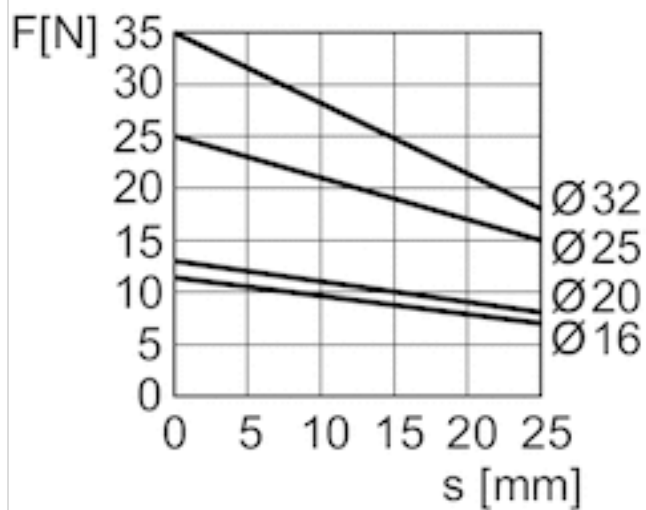

F = spring return force, s = return stroke


Maximum admissible lateral force, static

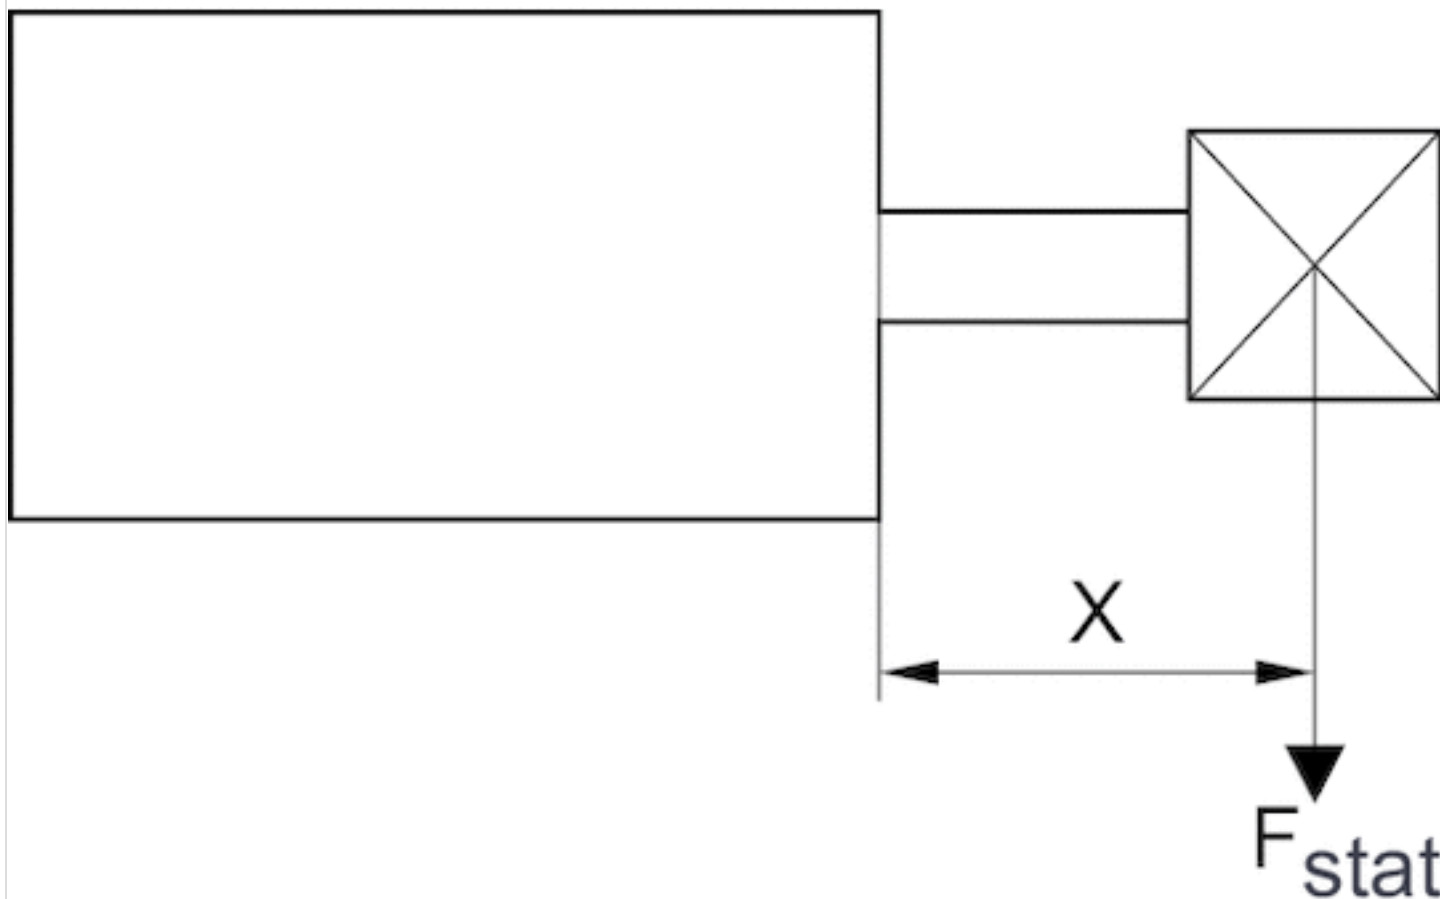

F_{stat} = static lateral force

X = distance between force application point and cylinder cover

Maximum admissible lateral force, static

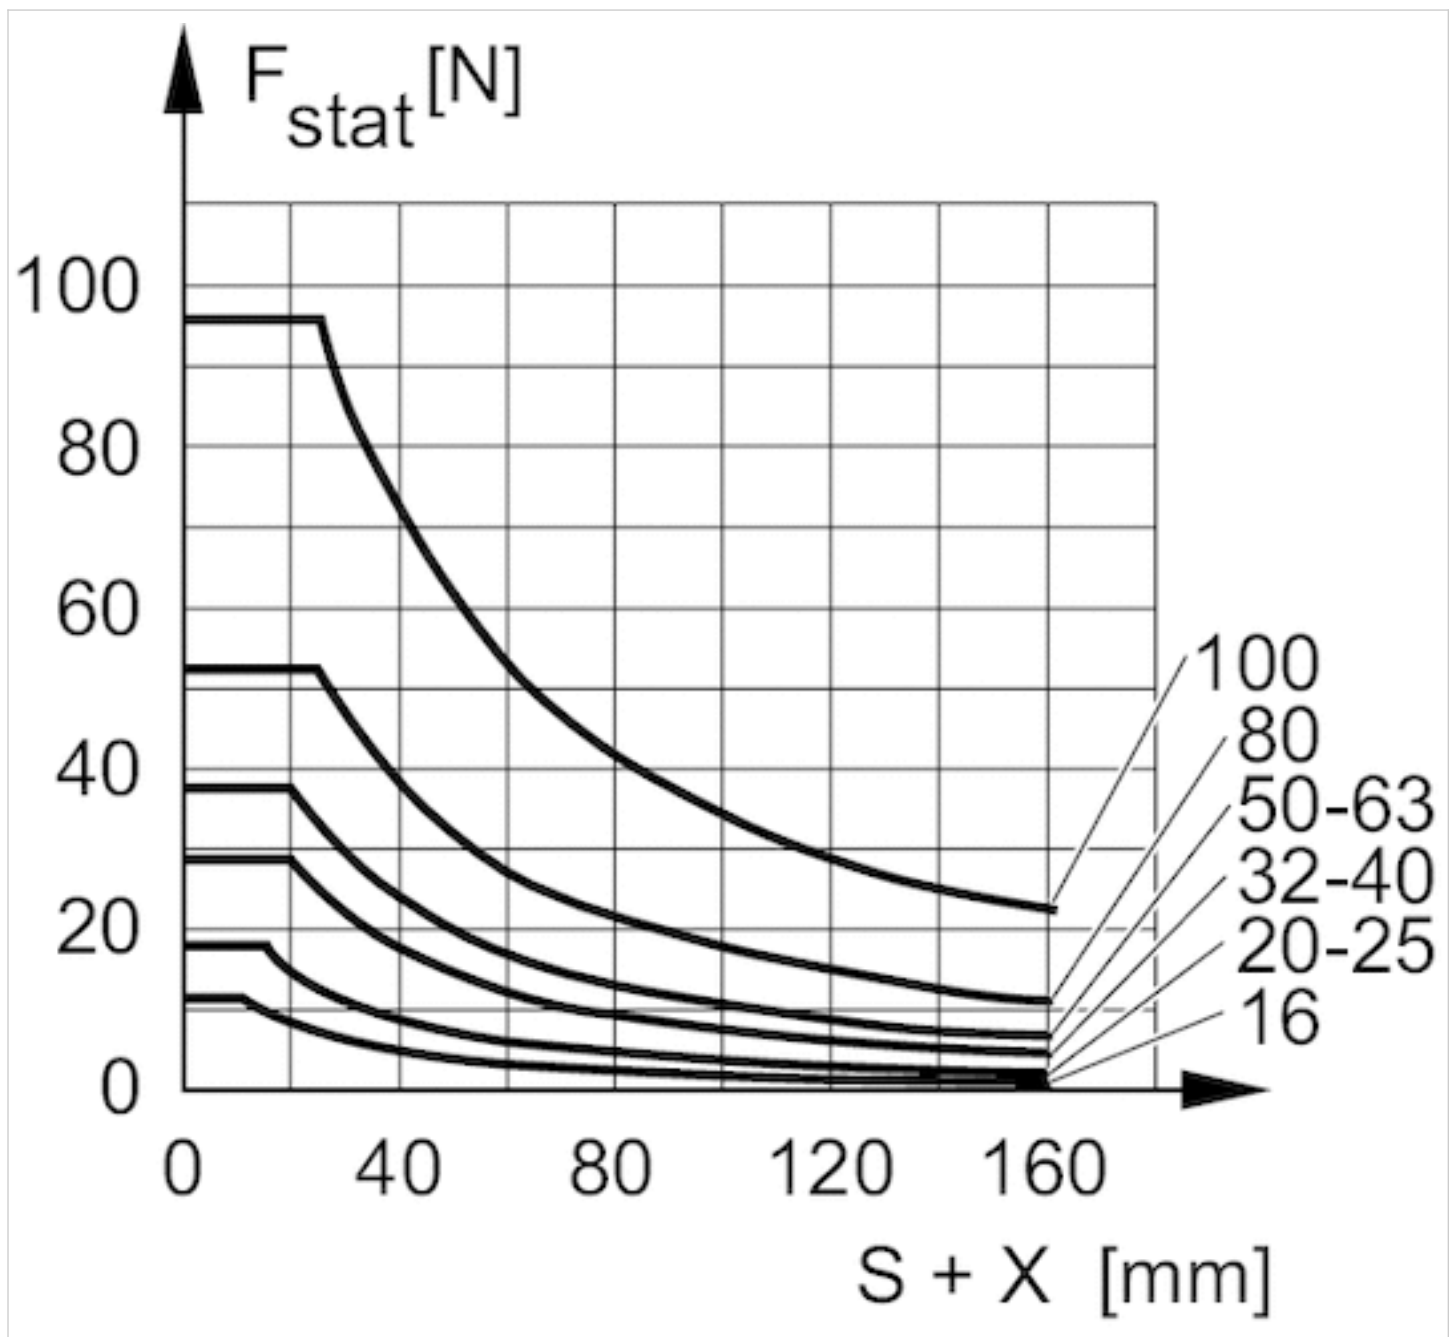


F_{stat} = static lateral force

X = distance between force application point and cylinder cover

S = stroke

Maximum admissible lateral force, dynamic

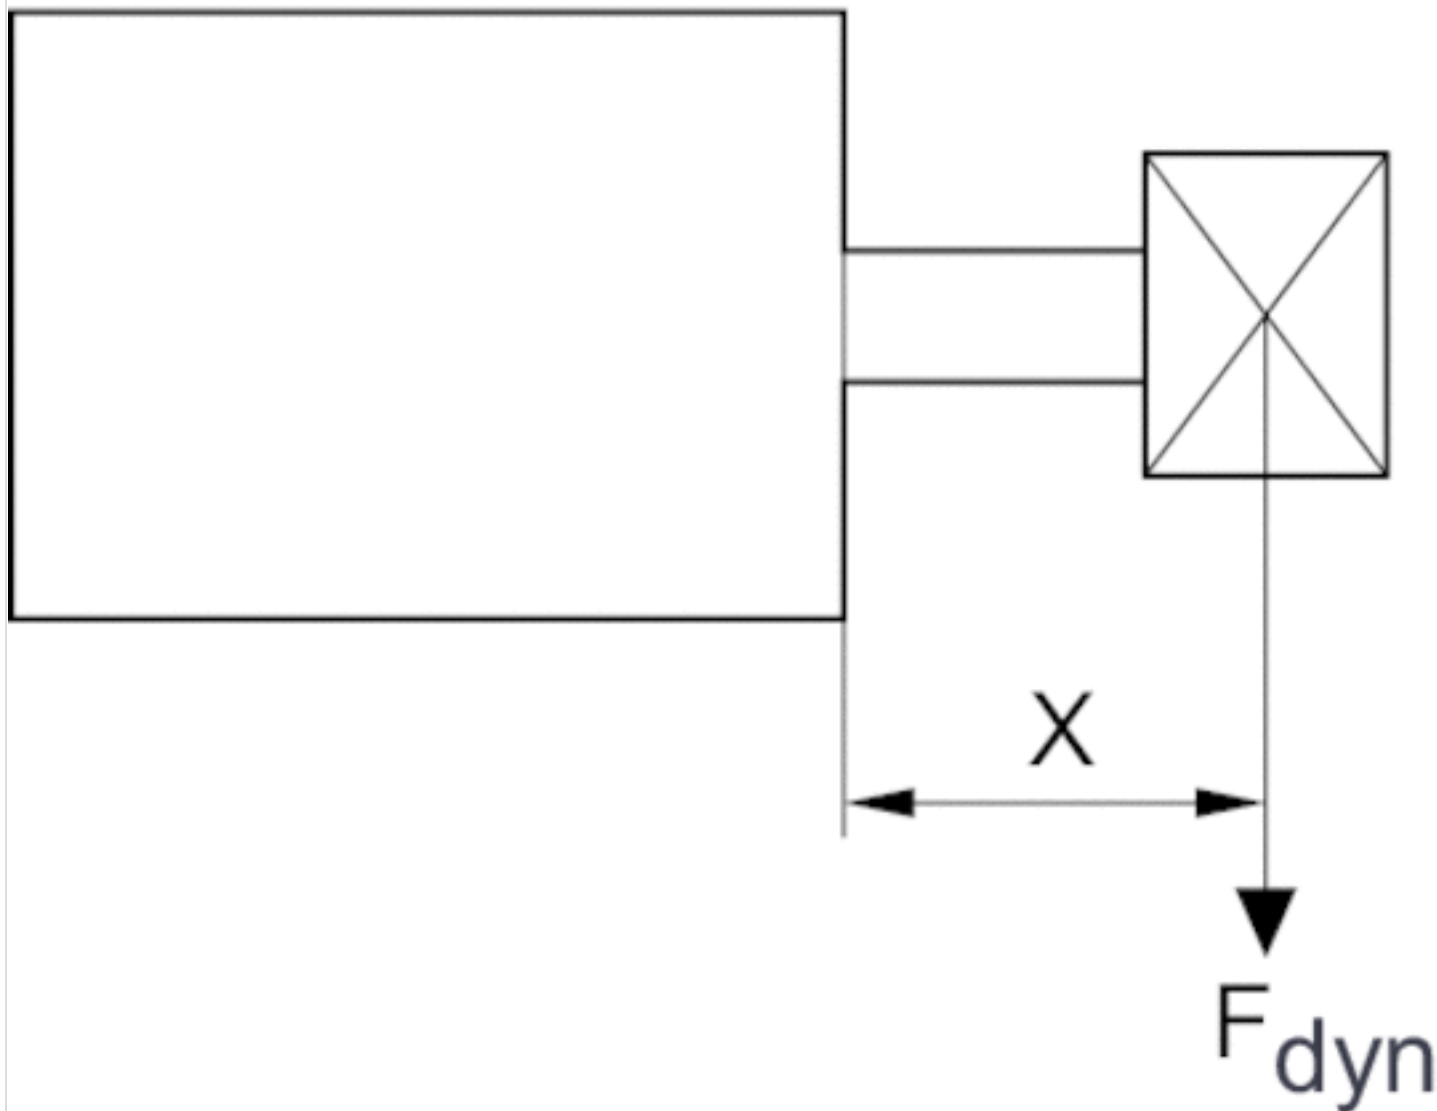


F_{dyn} = dynamic lateral force

X = distance between force application point and cylinder cover

S = stroke

Maximum admissible lateral force, dynamic

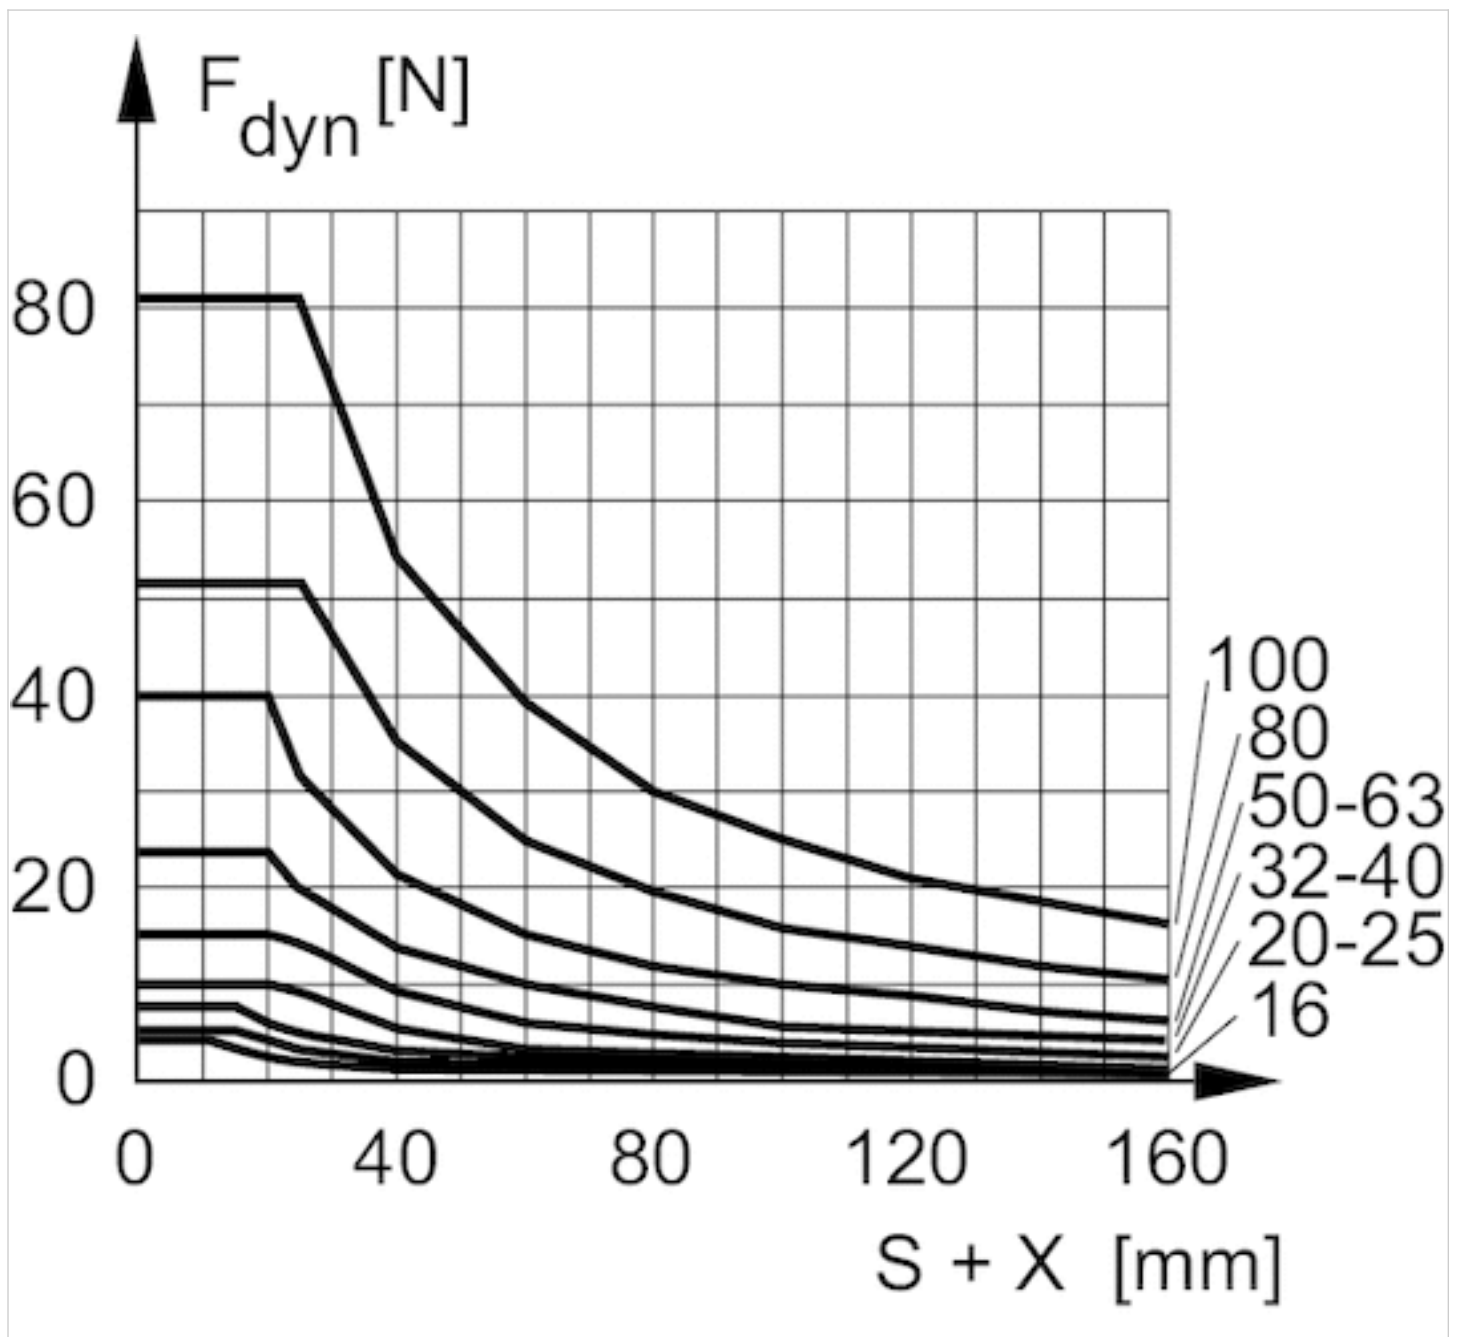


F_{dyn} = dynamic lateral force

X = distance between force application point and cylinder cover

S = stroke

Accessories overview

Overview drawing

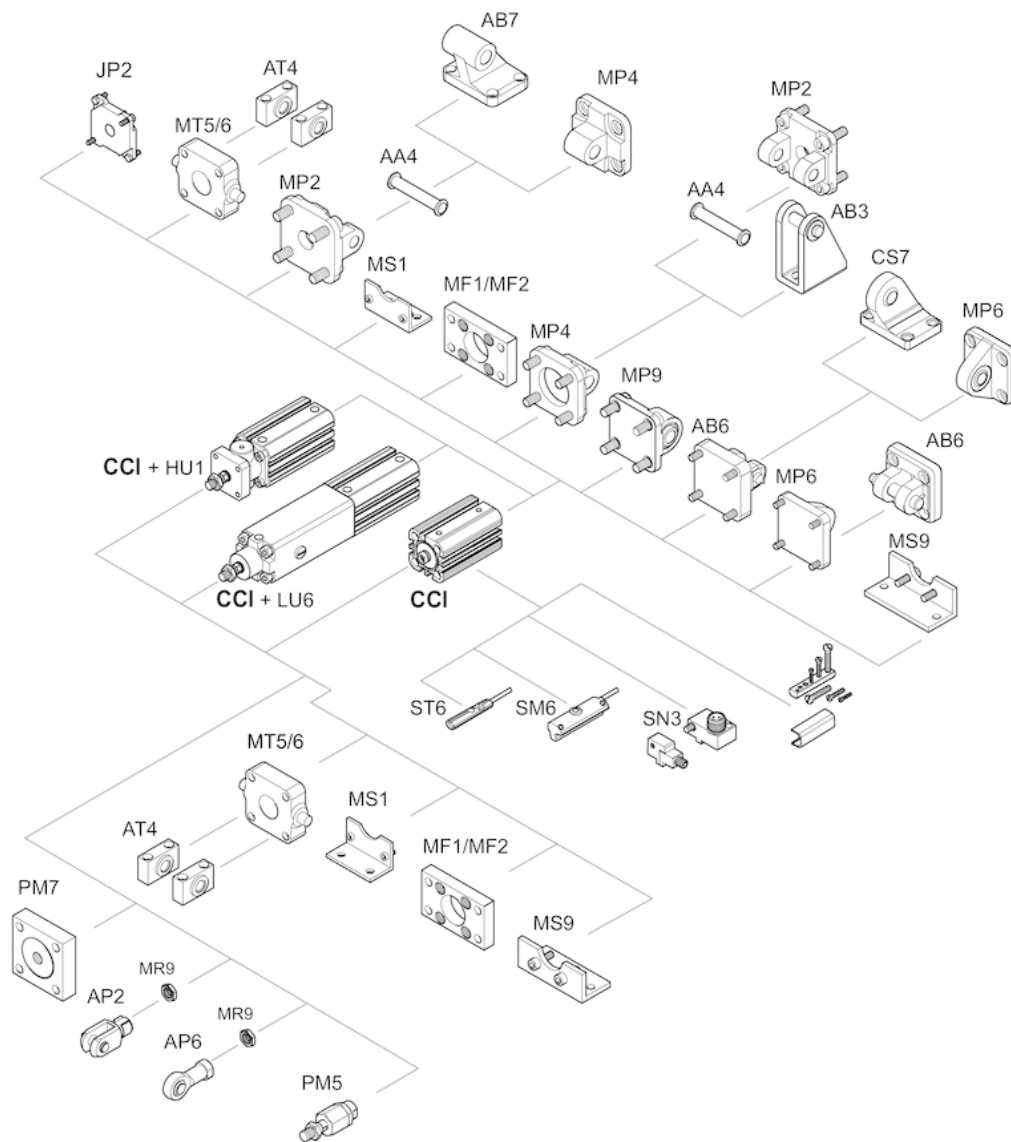

NOTE:

This overview drawing is only for orientation to indicate where the various accessory parts can be fastened to the cylinder. The illustration has been simplified for this purpose. It is thus not possible to derive the dimensions from this overview.

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™