












# 3/2 directional valve, LS04-AF series

- 2x3/2
- Qn = 175-310 l/min
- NO/NO NC/NC NC/NO
- Pipe connection
- Compressed air connection output : Ø 4 Ø 6
- Electrical connection : 2, Plug, Industrial plug connector, 2-pin
- Manual override : with detent
- Pilot : Internal



Type	Spool valve, positive overlapping
Activation	Electrically
Pilot	Internal
Sealing principle	Soft sealing
Working pressure min./max.	3 ... 7 bar
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 50 °C
Medium	Compressed air
Max. particle size	5 µm
Oil content of compressed air	0 ... 5 mg/m³
Nominal flow Qn	See table below
Protection class acc. to DIN EN 61140 Electrically	Class III
Protection class with connection	IP50
Protective circuit	Z-diode
LED status display	Yellow
Duty cycle	100 %
Typ. switch-on time	12 ms
Typ. switch-off time	15 ms
Generic emission standard in accordance with	EN 61000-6-4:2002
Generic immunity standard in accordance with	IEC 61000-6-2:2005
mounting screws	M3
Mounting screw tightening torque	0,5 Nm
Weight	0,064 kg

## Technical data

Part No.		MO		Compressed air connection
				Input
R422103575			NO/NO	Ø 4
R422103576			NO/NO	Ø 6
R422103583			NC/NC	Ø 4
R422103584			NC/NC	Ø 6
R422103591			NC/NO	Ø 4
R422103592			NC/NO	Ø 6

Part No.	Compressed air connection	Compressed air connection
	Output	Exhaust
R422103575	Ø 4	Ø 4
R422103576	Ø 6	Ø 6
R422103583	Ø 4	Ø 4
R422103584	Ø 6	Ø 6
R422103591	Ø 4	Ø 4
R422103592	Ø 6	Ø 6

Part No.	Operational voltage	Voltage tolerance	Power consumption
	DC	DC	DC
R422103575	24 V	-10% / +10%	1,3 W
R422103576	24 V	-10% / +10%	1,3 W
R422103583	24 V	-10% / +10%	1,3 W
R422103584	24 V	-10% / +10%	1,3 W
R422103591	24 V	-10% / +10%	1,3 W
R422103592	24 V	-10% / +10%	1,3 W

Part No.	Flow conductance	Flow conductance	Nominal flow Qn
	b	C-value	
R422103575	0,4	0,8 l/(s*bar)	175 l/min
R422103576	0,25	1,2 l/(s*bar)	250 l/min
R422103583	0,4	0,8 l/(s*bar)	180 l/min
R422103584	0,3	1,5 l/(s*bar)	310 l/min
R422103591	0,4	0,8 l/(s*bar)	175 l/min
R422103592	0,25	1,2 l/(s*bar)	250 l/min

Nominal flow Qn at 6 bar and  $\Delta p = 1$  bar, MO = Manual override

## Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).


A duty cycle of 100 percent is only valid for single valves.

## Technical information

Material	
Housing	Polyoxymethylene
Seals	Acrylonitrile butadiene rubber Hydrogenated nitrile butadiene rubber Polyurethane

## Dimensions

dimensions, double solenoid

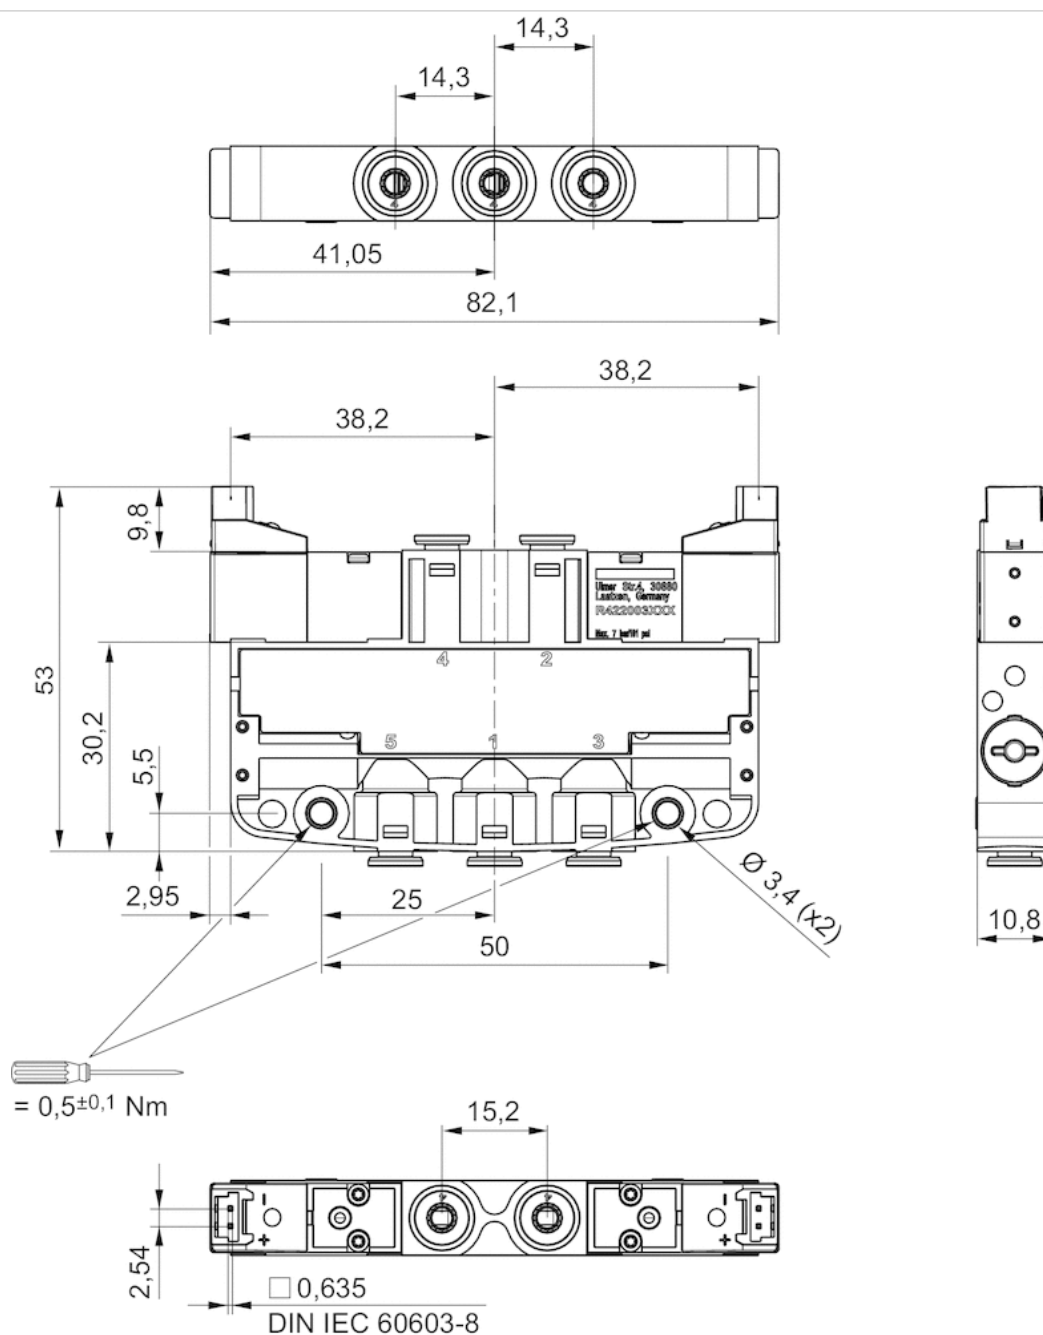

# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR\_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.  
2020-12



## CONSIDER IT SOLVED™