

# Coil, Series CO1

- form A
- Coil width 30 mm
- Power consumption DC 10 W
- Holding power AC 17 VA
- Switch-on power AC 30 VA



Connector standard  
electrical connections

Ambient temperature min./max.

Protection class With valve plug  
connector/plug

Duty cycle ED

Compatibility index

EN 175301-803, form A


Plug, 3-pin

-20 ... 50 °C

IP65

100 %

33



## Technical data

Part No.	Operational voltage	Operational voltage	Operational voltage
	DC	AC 50 Hz	AC 60 Hz
0498320503	12 V	-	-
0498319718	24 V	-	-
0498320406	48 V	-	-
0498320309	110 V	-	-
0498320201	220 V	-	-
0498319807	-	24 V	24 V
0498319904	-	110 V	110 V
0498322409	-	230 V	230 V

Part No.	Voltage tolerance	Voltage tolerance	Voltage tolerance	Power consumption
	DC	AC 50 Hz	AC 60 Hz	DC
0498320503	-10% / +10%	-	-	10 W
0498319718	-10% / +10%	-	-	10 W
0498320406	-10% / +10%	-	-	10 W
0498320309	-10% / +10%	-	-	10 W
0498320201	-10% / +10%	-	-	10 W
0498319807	-	-10% / +10%	-10% / +10%	-
0498319904	-	-10% / +10%	-10% / +10%	-
0498322409	-	-10% / +10%	-10% / +10%	-



Part No.	Holding power	Holding power	Switch-on power	Switch-on power
	AC 50 Hz	AC 60 Hz	AC 50 Hz	AC 60 Hz
0498320503	-	-	-	-
0498319718	-	-	-	-
0498320406	-	-	-	-
0498320309	-	-	-	-
0498320201	-	-	-	-
0498319807	17 VA	14,5 VA	30 VA	25 VA
0498319904	17 VA	14,5 VA	30 VA	25 VA
0498322409	17 VA	14,5 VA	30 VA	25 VA

## Technical information

Material	
Housing	Thermoplastic elastomer

## Dimensions

### Dimensions

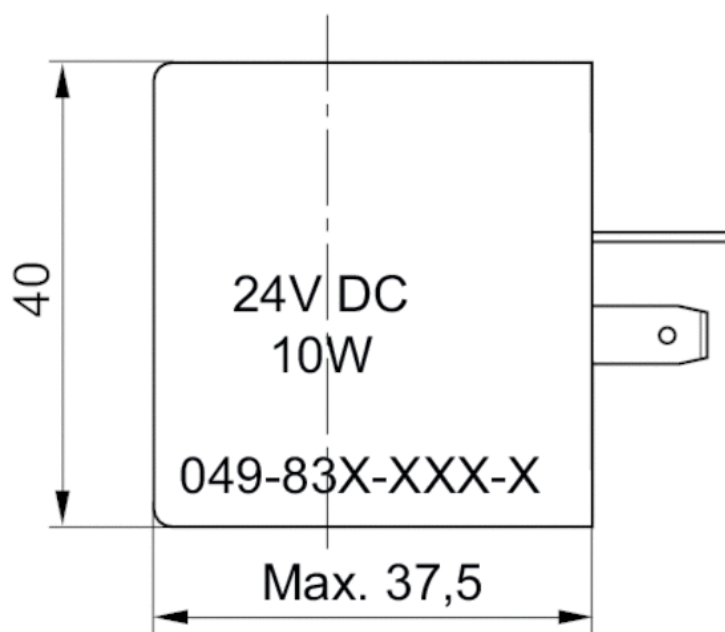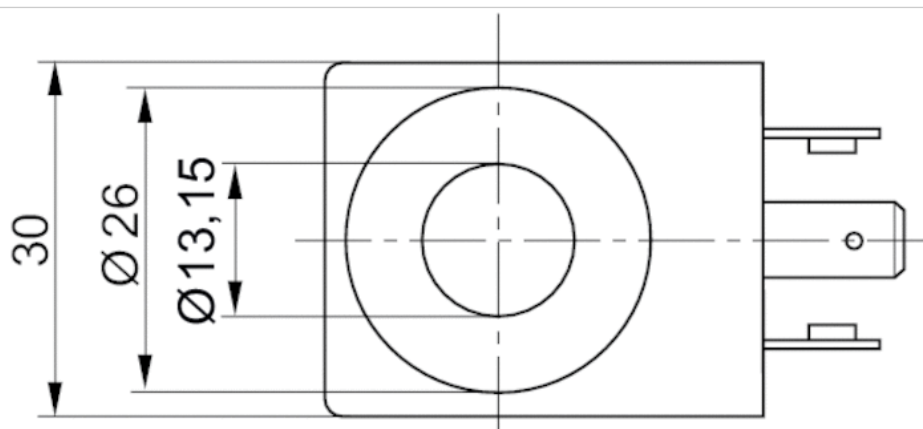

# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR\_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.  
2020-12



## CONSIDER IT SOLVED™