

Manifold strip, Series CD04

- 5/2 and 5/3-directional valves



Compressed air connection

Working pressure min./max.

Ambient temperature min./max.

Medium temperature min./max.

Medium

Exhaust (3,5)

according to ISO 228-1

-0,95 ... 16 bar

-25 ... 80 °C

-25 ... 80 °C

Compressed air

uncollected exhaust

Technical data

Part No.	Compressed air connection Input [1]	Number of valve positions
3337110222	Ø 10x1	2
3337110232	Ø 10x1	3
3337110242	Ø 10x1	4
3337110252	Ø 10x1	5
3337110262	Ø 10x1	6
3337110272	Ø 10x1	7
3337110282	Ø 10x1	8
3337110292	Ø 10x1	9
3337110302	Ø 10x1	10
3337110312	Ø 10x1	11
3337110322	Ø 10x1	12

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Base plate	Aluminum Polyoxymethylene
Seal	Acrylonitrile butadiene rubber
Mounting bracket	Steel

Dimensions

Dimensions

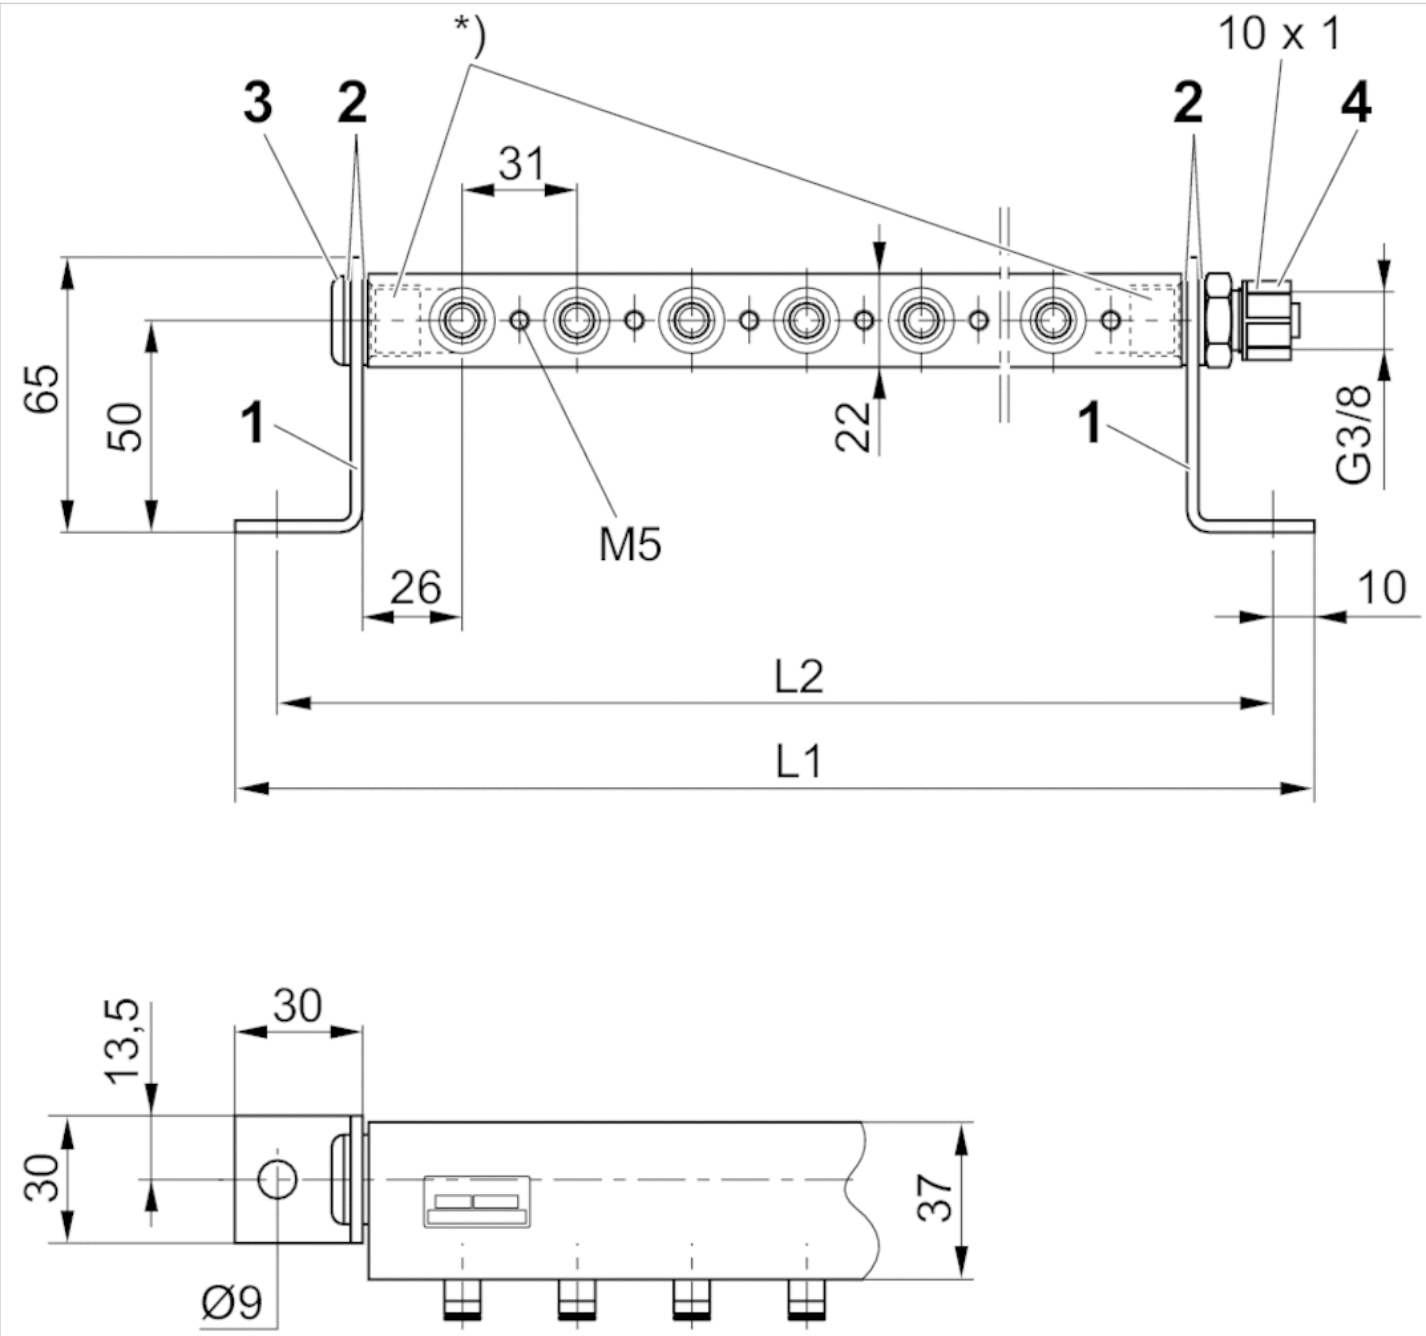

Angled bracket (1), seal DIN 7603 Al (2), blanking screw G 3/8 ISO 228/1 (3), push-in fittings G 3/8 ISO 228/1, diameter 10x1 (4)

* Only use fittings with max. length of thread engagement equal to 12 mm.

Valve mounting screws (depending on the valve used): washer, screw, O-ring must be ordered separately.

Dimensions

Part No.	L1	L2
3337110222	142	122
3337110232	169	149
3337110242	196	176
3337110252	223	203

Part No.	L1	L2
3337110262	250	230
3337110272	277	257
3337110282	304	284
3337110292	331	311
3337110302	358	338
3337110312	385	365
3337110322	412	392

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™